

United States Department of the Interior
Bureau of Land Management

Lander Field Office National Historic Trail Visitor
Impact Monitoring Report

July 2016

BLM-Wyoming
Lander Field Office

Lander Field Office
1335 Main Street
Lander, Wyoming 82520
307-332-8400

Background:

On March 28, 2005, the Bureau of Land Management (BLM) Lander Field Office signed the FONSI/Decision Record for the issuance of a Special Recreation Permit (SRP) to conduct handcart trekking activities on BLM administered public land between Sixth Crossing and Rock Creek Hollow (here-by referred to as the *2005 decision*). The actions and issues covered by the 2005 decision are as follows:

- The standards as to when a SRP will be required for group use of the National Historic Trails.
- Identified a SRP route, staging areas, and sanitation locations
- SRP season of use
- Authorized number of participants per season
- SRP Maximum group size
- Vehicle Use on the National Historic Trail
- Monitoring requirements
- Invasive species awareness and prevention

Map 1 of Attachment A, shows the existing hand cart trekking route and support locations.

Since the 2005 decision, The Corporation of the Presiding Bishop of The Church of Jesus Christ of Latter-day Saints (CPB) has been the main permittee of this area. This permittee has become accustomed to the terms of and conditions of the permit and has instituted a monitoring program to ensure that their guided groups are in compliance with the requirements of the SRP.

The 2005 decision allocated CPB 5,000 visitors a year to conduct handcart reenactments on the National Trails between Sixth Crossing and Rock Creek Hollow. An additional 2,500 visitors per year were reserved for other users, including general public users. These numbers were believed to be the carrying capacity of the area and were based on informal monitoring collected during the 2004 season.

The 2004 use season was far from normal, with use levels swelling to 12,000 visitors. Moreover, most of these users were not restricted to the current SRP terms and conditions that minimize resource impacts. For instance, several groups during the 2004 season were using vehicles on the trail. At one point during the 2004 season, a BLM employee observed 30 vehicles traveling the trail in order to provide trek support. Since the 2005 decision however, permitted users are not authorized to use vehicles on the trail. In hindsight, the concerns associated with the 2004 season were less a factor of the total number of people and more a concern towards visitor behavior causing impact.

Based on the last 10 years of managing the permit, a normal year in this area is a stark contrast to the 2004 season. Currently, there is very high compliance with all the terms and conditions of the permit. Support vehicles are limited to 4 per group, and typically CPB limits theirs to 2. These vehicles are only allowed to meet the trekkers at identified support locations along two-tracks that bisect the National Historic Trails. In addition, the effort put forth by the CPB has exponentially reduced off-trail travel and other visitor behaviors that can cause unnecessary resource damage (such as littering and off trail use).

Meanwhile, several aspects of the 2005 decision began to work. In addition, demand from entities outside of the Mormon Church continued to be steady but very low, with only a few permits being issued since 2005. Finally, unpermitted use (groups smaller than 25 visitors) occurred at irregular intervals but peak annually during the antelope hunting season (September through October).

No attempt to collect strict visitation numbers has been instituted. It can be said that compared to other areas of the field office this area receives a relatively high amount of visitation, but the majority of the use on the NHT's is 'non-motorized through traffic' in association with the CPB permit.

As will be demonstrated further, the BLM and others have found that the intensity of non-motorized use associated with the CPB permit has no clear correlation with physical impacts. In 2011, as a result of this finding and in an effort to reward strong permit compliance, the BLM made a decision to award the CPB an additional 1,000 visitors per year. Since other permitted use remained low, the BLM considered this decision to be within the parameters provided and analyzed in the 2005 decision. In other words, total use would still not exceed the 7,500 level and therefore the supporting analysis and 2005 decision was determined to be adequate.

With the CPB permit expiring on December 31st of 2015, there is a need to address some shortfalls in the 2005 decision. Primarily, the strict visitation allocations from 2005 were not based on a desired resource condition, and instead were tied to informal monitoring that occurred during an extreme and unmanaged use season.

The establishment of a static carrying capacity number for the area failed to recognize that physical impact from recreational use is loosely correlated to amount of use and is likely more correlated to a complex interaction between the amount of use, type of use, the location of use, timing, and the behavior of the user (Cole, 1993). For example, one motorized user traveling off-road in a riparian area or when the ground is saturated can cause more long-term damage than 6,000 non-motorized users staying on the trail when conditions are dry.

Most of the current monitoring along the NHT measures physical impacts or physical change. The monitoring does not attempt to collect visitor surveys nor conduct user interviews that could lead toward the establishment of a social carrying capacity. However, it is assumed that exploring and researching this would not yield an exact or definitive number either, and will also vary by season, type of user, and the behavior of the user.

These findings call into question the necessity of a static visitation allocation at the SRP level. Importantly, there are numerous terms and conditions placed on the CPB permit that ensure visitor behavior does not impact resources. These terms and conditions are above and beyond what is required of the general public and therefore provide for the ability to accommodate for more visitors with less impact.

As part of the permit renewal process, the following factors associated with the CPB permit will be reviewed: limitations on total visitors per season, limitations on group size, and seasonal restrictions/limitations on the group size and number of groups per trek segment. Ultimately the BLM

would like to establish impact thresholds that will equip the agency with more flexibility to maximize harmonious uses, while furthering the protection of the National Historic Trails.

An overview of the physical impact monitoring and data collection follows.

USGS Aerial-Photographic Assessment

In 2008, the USGS finalized an analysis of high resolution aerial-photos of the trek area. This analysis was aimed at assessing the impacts of handcarts reenactments on the National Historic Trails. The analysis utilized BLM knowledge of the area in attempt to separate handcart impacts from those of motorized vehicles and other users in the area. The full assessment is attached (see Attachment B), but the following excerpt summarizes the USGS findings:

“Based on these results, there are identifiable management considerations. Toilet and rest sites need to be carefully located relative to where sensitive vegetation or soils occur. The analyses presented here indicate that limiting motorized vehicle use needs to be a priority over that of adjusting number of trekkers. Additionally, monitoring of the Trail from Sixth Crossing to Rock Creek Hollow segments needs to consider explicit management targets, such as minimum acceptable levels of bare ground or trail width,....” (McDougal et al 2008, pg. 1)

This findings support and compliment the BLM’s monitoring results described below.

BLM Physical Impact Monitoring:

From 2005 -2007 the BLM focused most of it’s monitoring efforts on ensuring permit compliance. As CPB began to show strong compliance with the terms and conditions of the permit, the BLM moved it’s focus towards gaining a better understanding of the physical impacts associated with the use. In 2007, the BLM developed the LFO National Historic Trail Monitoring Protocol (see attachment C) for collecting impact parameters along the trekking route.

Data is collected on 36 sites separated by half mile increments along the handcart trek route. The data collection process has spanned eight years from 2007 through 2014. In an effort to isolate impacts from trekking use, the data is collected before trekking season begins (Pre-trekking) and after (Post-trekking) the SRP use season.


The BLM compiled all trail measurements taken from 2007 to 2014. Data was not collected in 2011 due to shifting staffing priorities. In order to avoid a data break during this year, the BLM used the median pre and post measurements calculated from 2007-2010 and 2012-2014 data.

Overall Site Ratings:

Site impact ratings represent an overall rating for a segment of trail and a site. These ratings are based on the total interaction of numerous data elements collected as outlined in the LFO National Historic Trail Monitoring Protocol (see attached).

The results have shown that almost all sites fluctuate between unimpacted, slight, and moderate ratings. A heavy impact rating was documented at one site in 2010, this rating occurred before the trekking season started and was due to motorized vehicles (general public users) avoiding a rutted wet meadow section of the trail. By the post season, this site had begun to heal and moved back to a moderate rating. There has not been a documented occurrence of a site receiving an extreme rating.

As the graph below depicts, the data collection from 2007 through 2014 demonstrates no real trend over time. Moreover, there is not a strong correlation between the site impact rating and the trek season, in fact, some years demonstrate that a recovery can occur during the trek season (see 2008 and 2012). These results could indicate that other forces both natural (moisture levels) and human caused (casual recreation users) may have more influence on the site rating than the amount of users and activities authorized under the CPB permit.

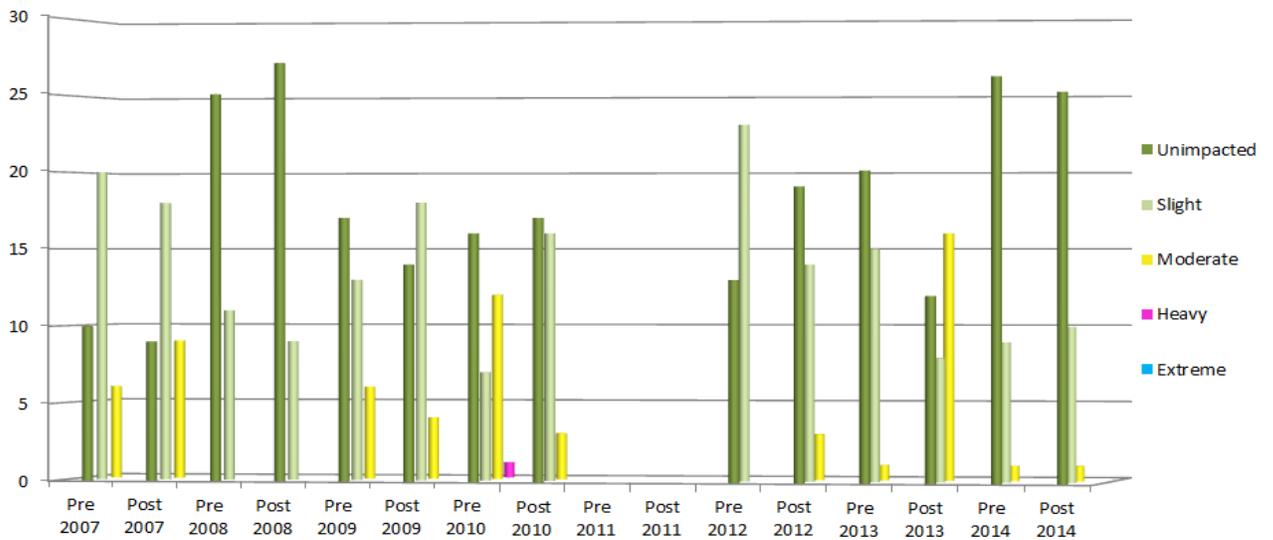

Trail Measurement Data Analysis:

Since the data does not represent a statistically valid sample and is greatly influenced by error, the summarization below was not generated through a statistical analysis. Instead the summary was produced through a series of evaluation criteria with inherent assumptions and error.

The trend for each site was developed using Microsoft excel trend-line function on the post season measurements. The BLM chose a polynomial trend line with 3 orders. This line type was chosen because

it had the capability to show stability over-time, increases over time, or decreases over time. Importantly this line type also had the capability to show a trend after the 2011 visitor use increase.

The following criteria were used to manually assign a trend to a given measurement and site:

- To be considered an upward trend the line had to end at a higher data point then the start.
- To be considered a stable trend the line had to end at a similar data point to the start.
- To be considered a downward trend the line had to end at a lower data point then the start.

The trends are further categorized based on the following criteria:

- An upward trend in greatest trail width, average track width, and greatest trail depth is an undesirable trend.
- A downward trend in width of trail vegetation and height of trail vegetation is an undesirable trend.
- All other trends not meeting the above criteria are considered desirable.

The trend of the post-season measurement is an important factor in considering total impact from all use, it is important to stress that the trend alone may or may not be influenced by trekking activities. In order to locate likely scenarios where trekking was influencing the data trend, the BLM utilized the following criteria:

- 1) In areas where the difference between post-season 7 year median and pre-season 7 year median (for greatest trail width, average track width, and greatest trail depth) is greater than 0, trekking is determined to be causing an annual impact.
- 2) In areas where the difference between post-season 7 year median and pre-season 7 year median (for total width of trail vegetation and height of trail vegetation) is a negative number, trekking is determined to be causing an annual impact.
- 3) Areas not found to be meeting one of the above criteria are then classified as not having an annual trek impact.

The results for each site are identified in the table below:

Sites #	Greatest Trail Width		Average Track Width		Greatest Trail Depth		Total Width of Trail Vegetation		Average Height of Trail Vegetation	
	Undesirable Trend	Annual Impact	Undesirable Trend	Annual Impact	Undesirable Trend	Annual Impact	Undesirable Trend	Annual Impact	Undesirable Trend	Annual Impact
1*		yes			yes	yes				yes
2*					yes					
3*				yes				yes		yes
4*		yes		yes	yes					yes

Sites #	Greatest Trail Width		Average Track Width		Greatest Trail Depth		Total Width of Trail Vegetation		Average Height of Trail Vegetation	
	Undesirable Trend	Annual Impact	Undesirable Trend	Annual Impact	Undesirable Trend	Annual Impact	Undesirable Trend	Annual Impact	Undesirable Trend	Annual Impact
5*		yes				yes				yes
6*					yes			yes		yes
7*		yes		yes	yes			yes		yes
8*		yes		yes	yes			yes		yes
9*	yes							yes		yes
10	yes	yes	yes	yes		yes	yes	yes		yes
11		yes			yes					
12		yes		yes						yes
13		yes		yes						yes
14							yes	yes	yes	yes
15			yes	yes	yes	yes	yes		yes	
16	yes	yes		yes	yes					
17		yes				yes		yes		yes
18				yes	yes	yes		yes		yes
19*						yes				yes
20*										
21*		yes			yes					
22*		yes		yes		yes		yes		
23*					yes					
24*		yes		yes				yes		yes
25*				yes	yes		yes	yes		yes
26*			yes	yes	yes		yes	yes	yes	yes
27*								yes		yes
28*					yes					yes
29*						yes				
30*	yes					yes				
31*		yes								
32*	yes			yes		yes		yes	yes	
33		yes								
34				yes	yes			yes		yes
35				yes						
36	yes								yes	
Total	6	16	3	17	17	11	5	16	6	21
On NHT	3	9	2	9	4	6	2	11	3	15

Greatest Trail Width:

Map 2 of Attachment A, displays the 7 year trends in greatest trail width of the trek route. These conditions are also summarized in the tables below.

Number of sites with a desirable (decreasing width) trend in post-season trail width	Number of sites with a desirable (stable) trend in post-season trail width	Number of sites with an undesirable (increasing width) trend in post-season trail width
17	13	6

Number of sites with an annual trek impact	Number of sites with no annual trek impact
16	20

Average Track Width:

Map 3 of Attachment A, displays the 7 year trends in averaged track width of the trek route. These conditions are also summarized in the tables below.

Number of sites with a desirable(decreasing track width) trend in post-season track width	Number of sites with a desirable (stable) trend in post-season track width	Number of sites with an undesirable (increasing width) trend in post-season track width
20	13	3

Number of sites with an annual trek impact on average track width	Number of sites with no annual trek impact on average track width
17	19

Greatest Trail Depth:

Map 4 of Attachment A, displays the 7 year trends in greatest trail depth of the trek route. These conditions are also summarized in the tables.

Number of sites with a desirable (decreasing depth) trend in post-season greatest trail depth	Number of sites with a desirable (stable) trend in post-season greatest trail depth	Number of sites with an undesirable (increasing depth) trend in post-season greatest trail depth
6	13	17

Number of sites with an annual trek impact on greatest trail depth	Number of sites with no annual trek impact on greatest trail depth
11	25

Total Width of Trail Vegetation:

Map 5 of Attachment A, displays the 7 year trends in greatest trail depth of the trek route. These conditions are also summarized in the table and text below.

Number of sites with a undesirable (decreasing width) trend in post-season total width of trail vegetation	Number of sites with a desirable (stable) trend in post-season total width of trail vegetation	Number of sites with a desirable (increasing width) trend in post-season total width of trail vegetation
5	15	16

Number of sites with an annual trek impact on total width of trail vegetation	Number of sites with no annual trek impact on total width of trail vegetation
16	20

Height of Trail Vegetation:

Map 5 of Attachment A, displays the 7 year trends in greatest trail depth of the trek route. These conditions are also summarized in the table and text below.

Number of sites with an undesirable (decreasing Height) trend in post-season height of trail vegetation	Number of sites with a desirable (stable) trend in post-season height of trail vegetation	Number of sites with a desirable (increasing height) trend in post-season height of trail vegetation
3	13	20

Number of sites with an annual trek impact on height of trail vegetation	Number of sites with no annual trek impact on height of trail vegetation
21	15

Conclusion:

The data indicates that the monitoring parameters being measured by the BLM is adequately sensitive to provide an early indicator should undesirable impacts begin to occur. If explicit management targets in lieu of strict visitation limits (as recommended by USGS) were implemented, it is likely that the current monitoring procedures and parameters would suffice to inform this process.

The most sensitive (most sites demonstrating an annual impact) parameter to visitation seems to be average track width. This is due to the fact that average track width increases when trail width increases and/or width of trail vegetation decreases. In other words, losses in center strip vegetation and adjacent trail vegetation results in a greater difference.

The least sensitive (least sites demonstrating an annual impact) parameter is greatest trail depth. This is probably due to the fact that greatest trail depth is likely only impacted when motorized vehicles travel on saturated soils and create ruts or over the long term from natural amounts of erosion. However, the trail depth parameter did contain the most sites with an undesirable trend. Since this change does not seem to be a result of trekking activities, it could be hypothesized that this trend is likely a result of natural processes or general public vehicle use not associated with the permitted activities.

At several sites, external conditions and/or impacts from the general public have been found to influence physical impact more than the total number of non-motorized visitors. For example, site 10 shows undesirable trends and an annual trek impact for most parameters. However, upon investigation of the site photos BLM found that the impacts to the site were being caused by a fence crossing and drop gate across a turn in the trail. This gate causes motorized users to swing wide as they approach the gate thus damaging vegetation both on the inside of the trail and along the outside of the turn radius. Importantly the motorized use in this section is associated entirely with general public users, not permit holders.

The BLM intensive monitoring data and the USGS overflight analysis indicate that the number of non-motorized users permitted to conduct handcart treks does not directly correlate to physical impact. In fact, a large portion of the trek route continues to show a healing trend despite the increase (since 2011) from 5,000-6,000 visitors/year to the CPB permit.

Work Cited

Cole, D. (1993). Minimizing Conflict between Recreation and Nature Conservation. In D. Smith, & P. Hellmund (Eds.), *Ecology of Greenways: Design and Function of Linear Conservation Areas* (pp. 105-102). Minneapolis, MN: University of Minnesota Press.

McDougal, R.R., Waltermire, R.G., Aldridge, C.L., Germaine, S.S., Nielsen, S.E., Nielsen, C.C., Hanson, Leanne, and Bowen, Z.H., 2008, An Aerial-Photographic Assessment of Reenacted Handcart Treks on a Section of the Mormon Pioneer National Historic Trail, Fremont County, Wyoming: U.S. Geological Survey Scientific Investigations Report 2008-5115, 70p.

Attachment A- Maps

Map 1: Trek Route and Support Locations



Legend

Trek Route Options

- 1 or 2 day
- 1, 2, or 1/2 day
- 1/2 day only

Vehicle Support Routes

- Support/Maintenance Vehicle Access
- Toilet Maintenance Only

Support and Restroom Locations


- On NHT Support/Restroom
- Off NHT Restroom
- Off NHT Support
- Off NHT Vehicle Parking



Date: 7/2/2015

No warranty is made by the Bureau of Land Management (BLM) for use of the data for purposes not intended by BLM.

Map 2: TotalTrail Width

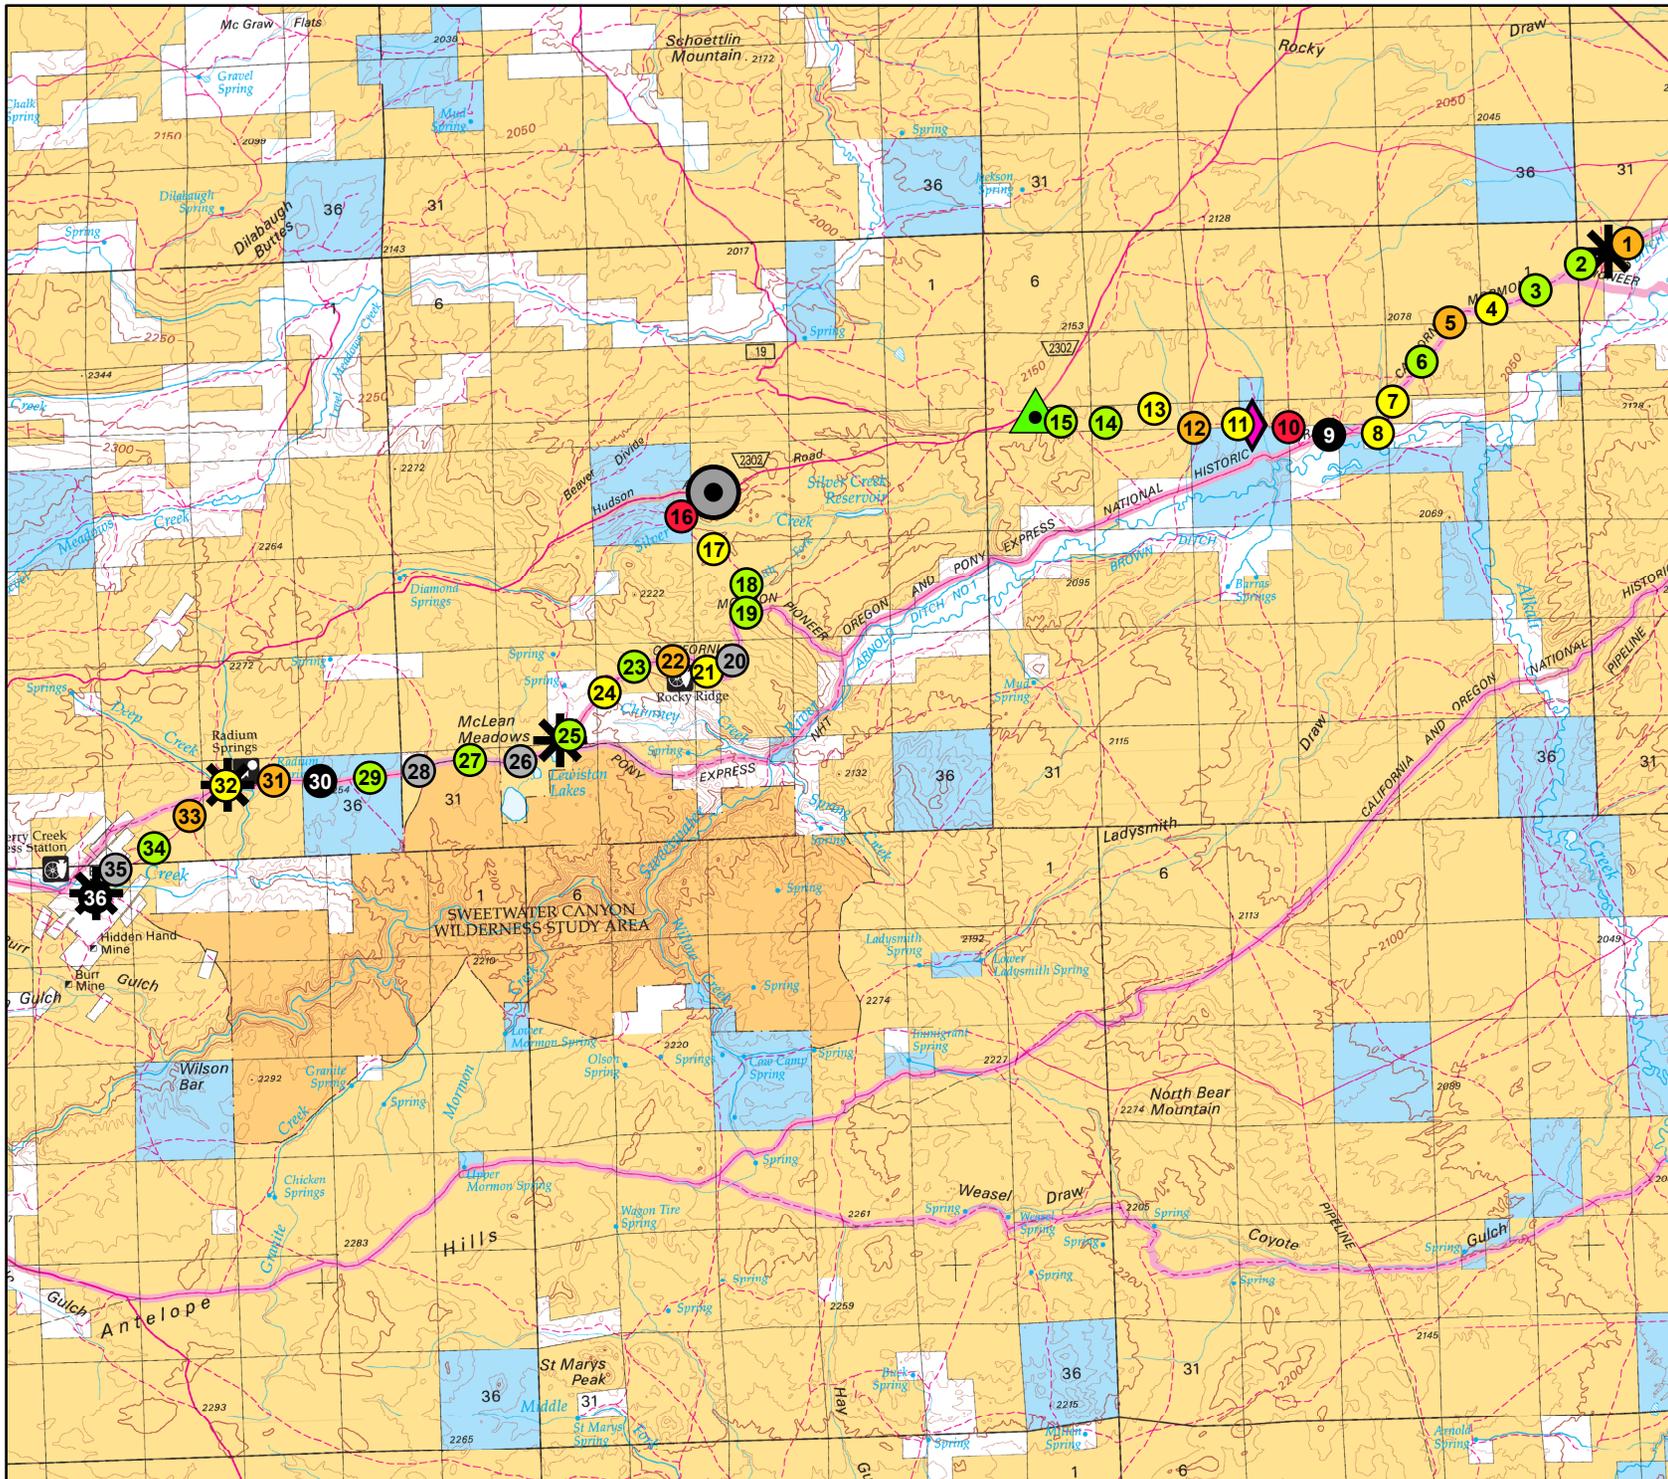

Legend

Monitoring Point and Results

- Desirable Trend No Annual Trek Impact
- Desirable Trend Annual Trek Impact
- Stable Trend Annual Trek Impact
- Stable Trend No Annual Trek Impact
- Undesirable Trend Annual Trek Impact
- Undesirable Trend No Annual Trek Impact

Support and Restroom Locations


- On NHT Support/Restroom
- Off NHT Restroom
- Off NHT Support
- Off NHT Vehicle Parking



Date: 7/2/2015

No warranty is made by the Bureau of Land Management (BLM) for use of the data for purposes not intended by BLM.

Map 3: Average Track Width

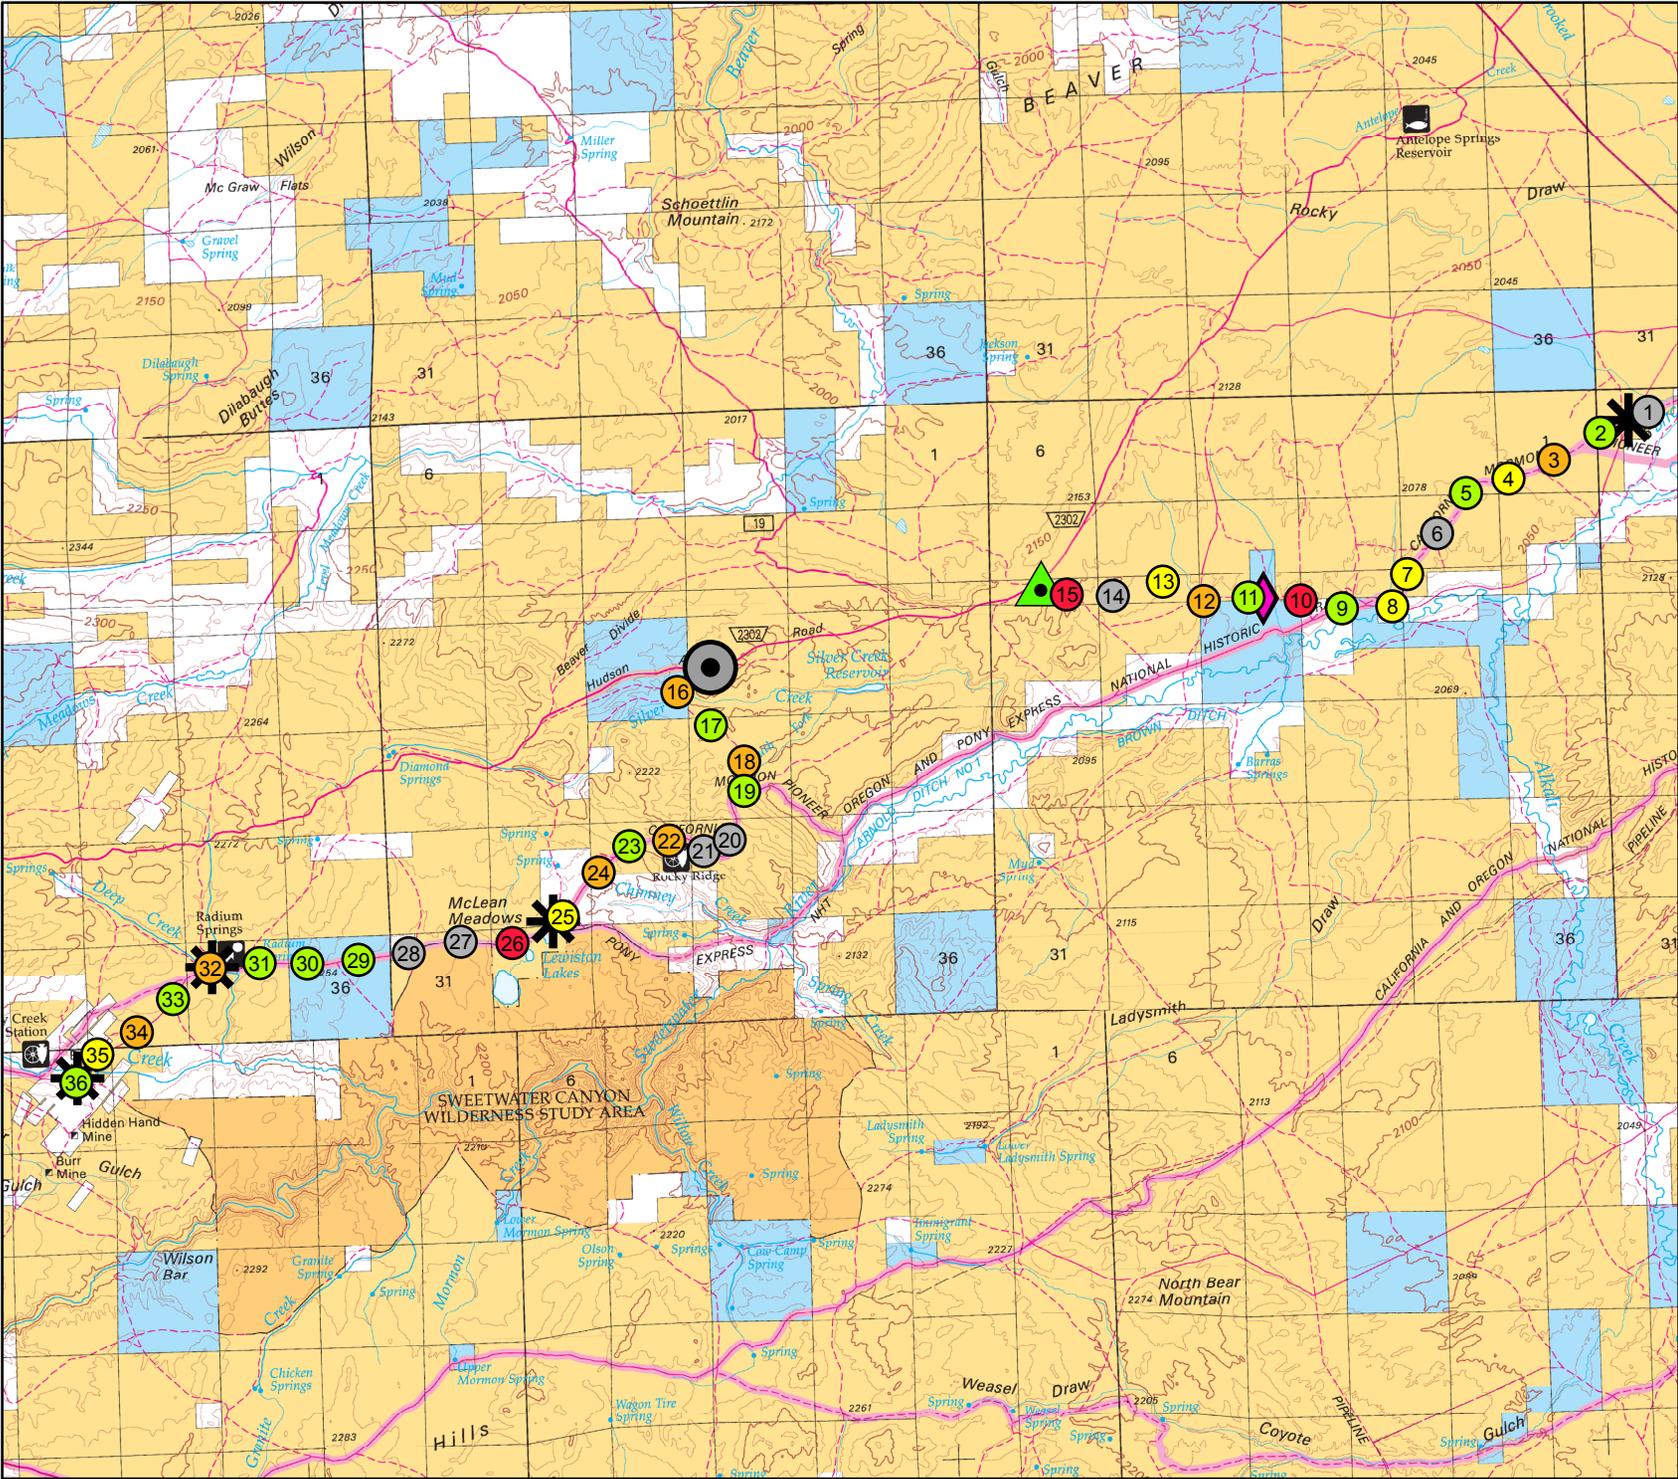

Legend

Monitoring Point and Results

- Desirable Trend No Annual Trek Impact
- Desirable Trend Annual Trek Impact
- Stable Trend Annual Trek Impact
- Stable Trend No Annual Trek Impact
- Undesirable Trend Annual Trek Impact
- Undesirable Trend No Annual Trek Impact

Support and Restroom Locations


- ✱ On NHT Support/Restroom
- ◆ Off NHT Restroom
- ▲ Off NHT Support
- Off NHT Vehicle Parking



Date: 7/2/2015

No warranty is made by the Bureau of Land Management (BLM) for use of the data for purposes not intended by BLM.

Map 4: Greatest Trail Depth

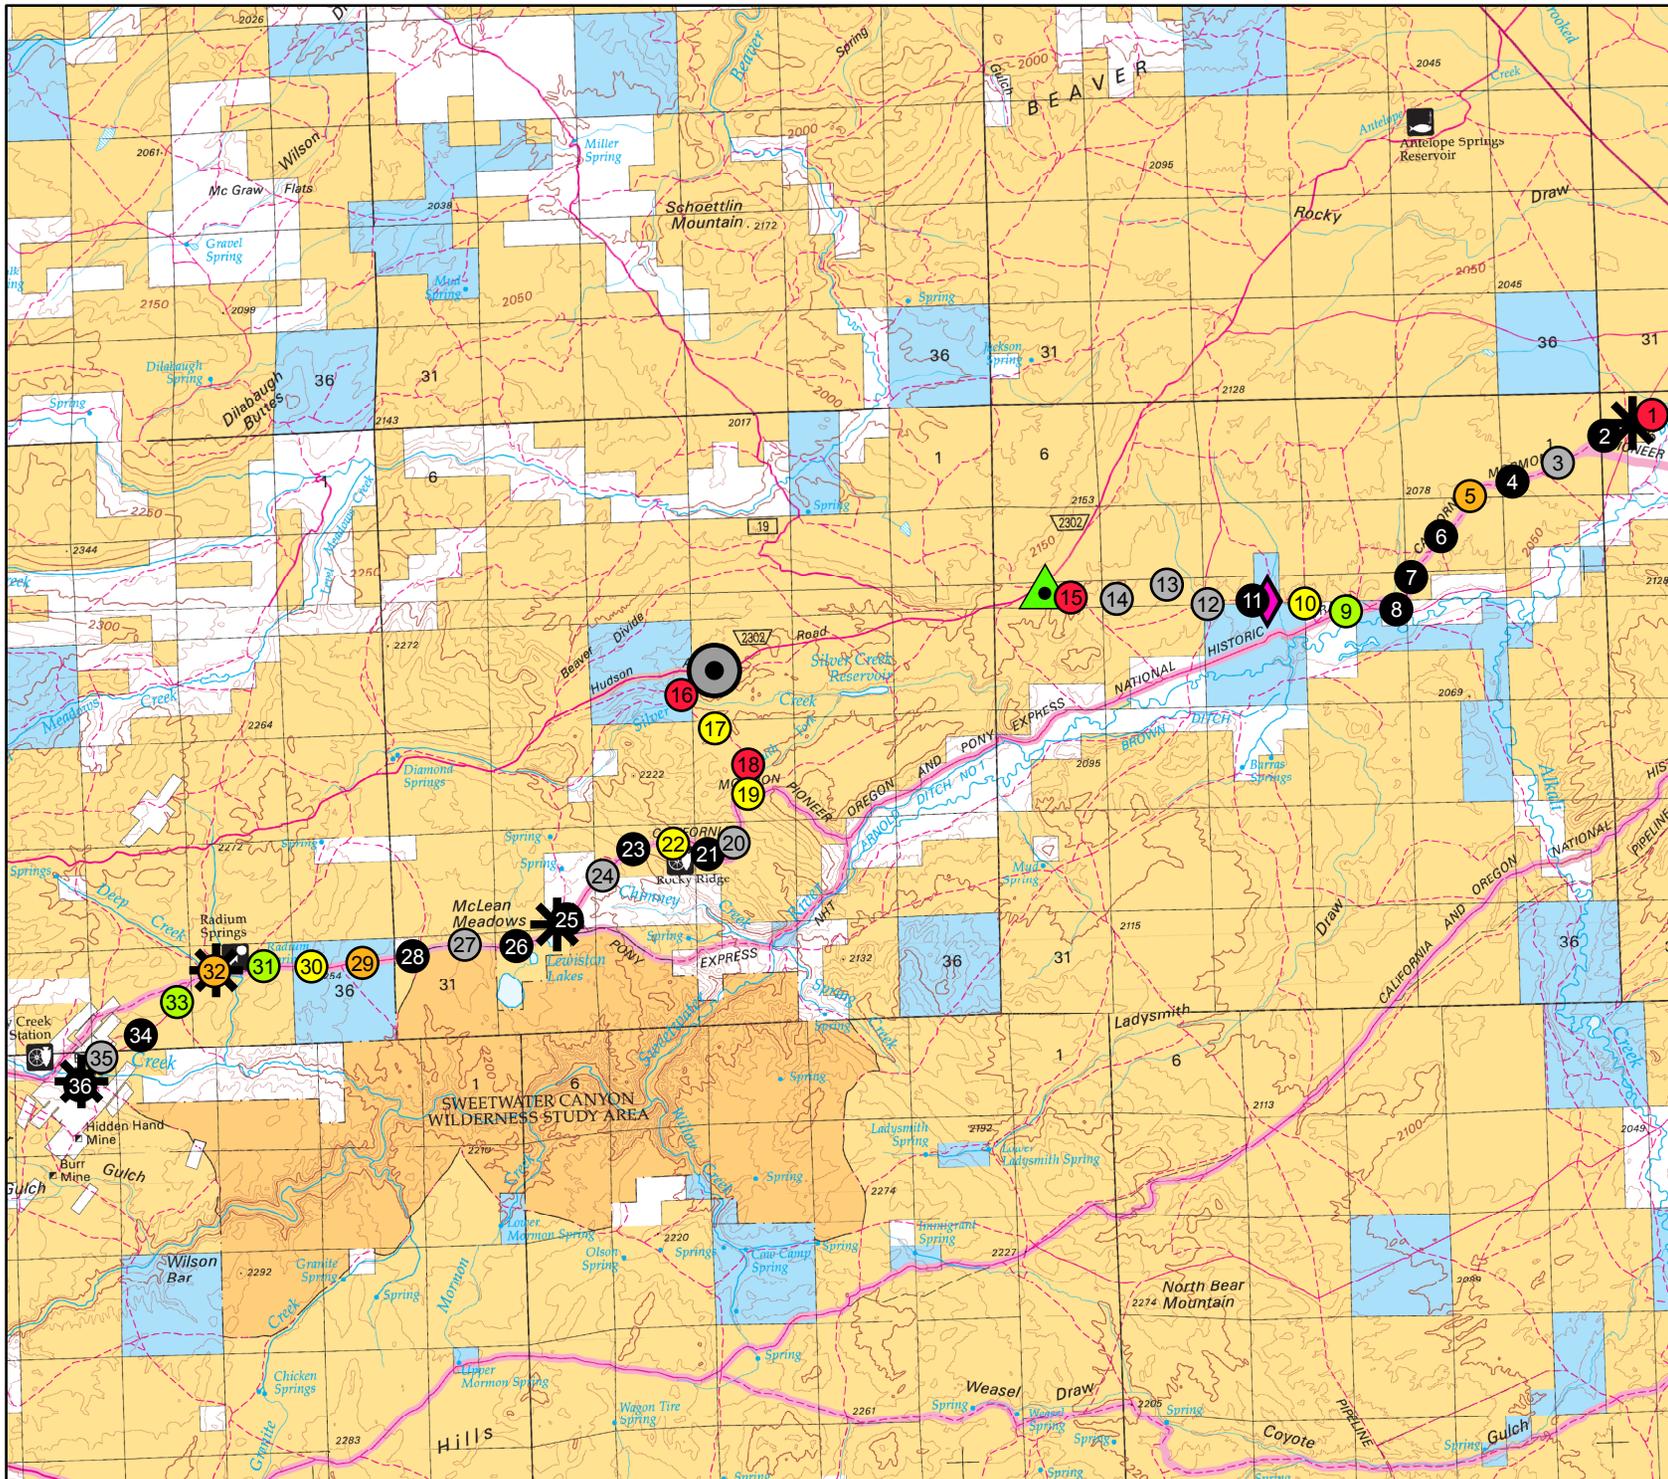

Legend

Monitoring Point and Results

- Desirable Trend No Annual Trek Impact
- Desirable Trend Annual Trek Impact
- Stable Trend Annual Trek Impact
- Stable Trend No Annual Trek Impact
- Undesirable Trend Annual Trek Impact
- Undesirable Trend No Annual Trek Impact

Support and Restroom Locations


- ✱ On NHT Support/Restroom
- ◆ Off NHT Restroom
- ▲ Off NHT Support
- ⊙ Off NHT Vehicle Parking



Date: 7/2/2015

No warranty is made by the Bureau of Land Management (BLM) for use of the data for purposes not intended by BLM.

Map 5: Total Width of Trail Vegetation

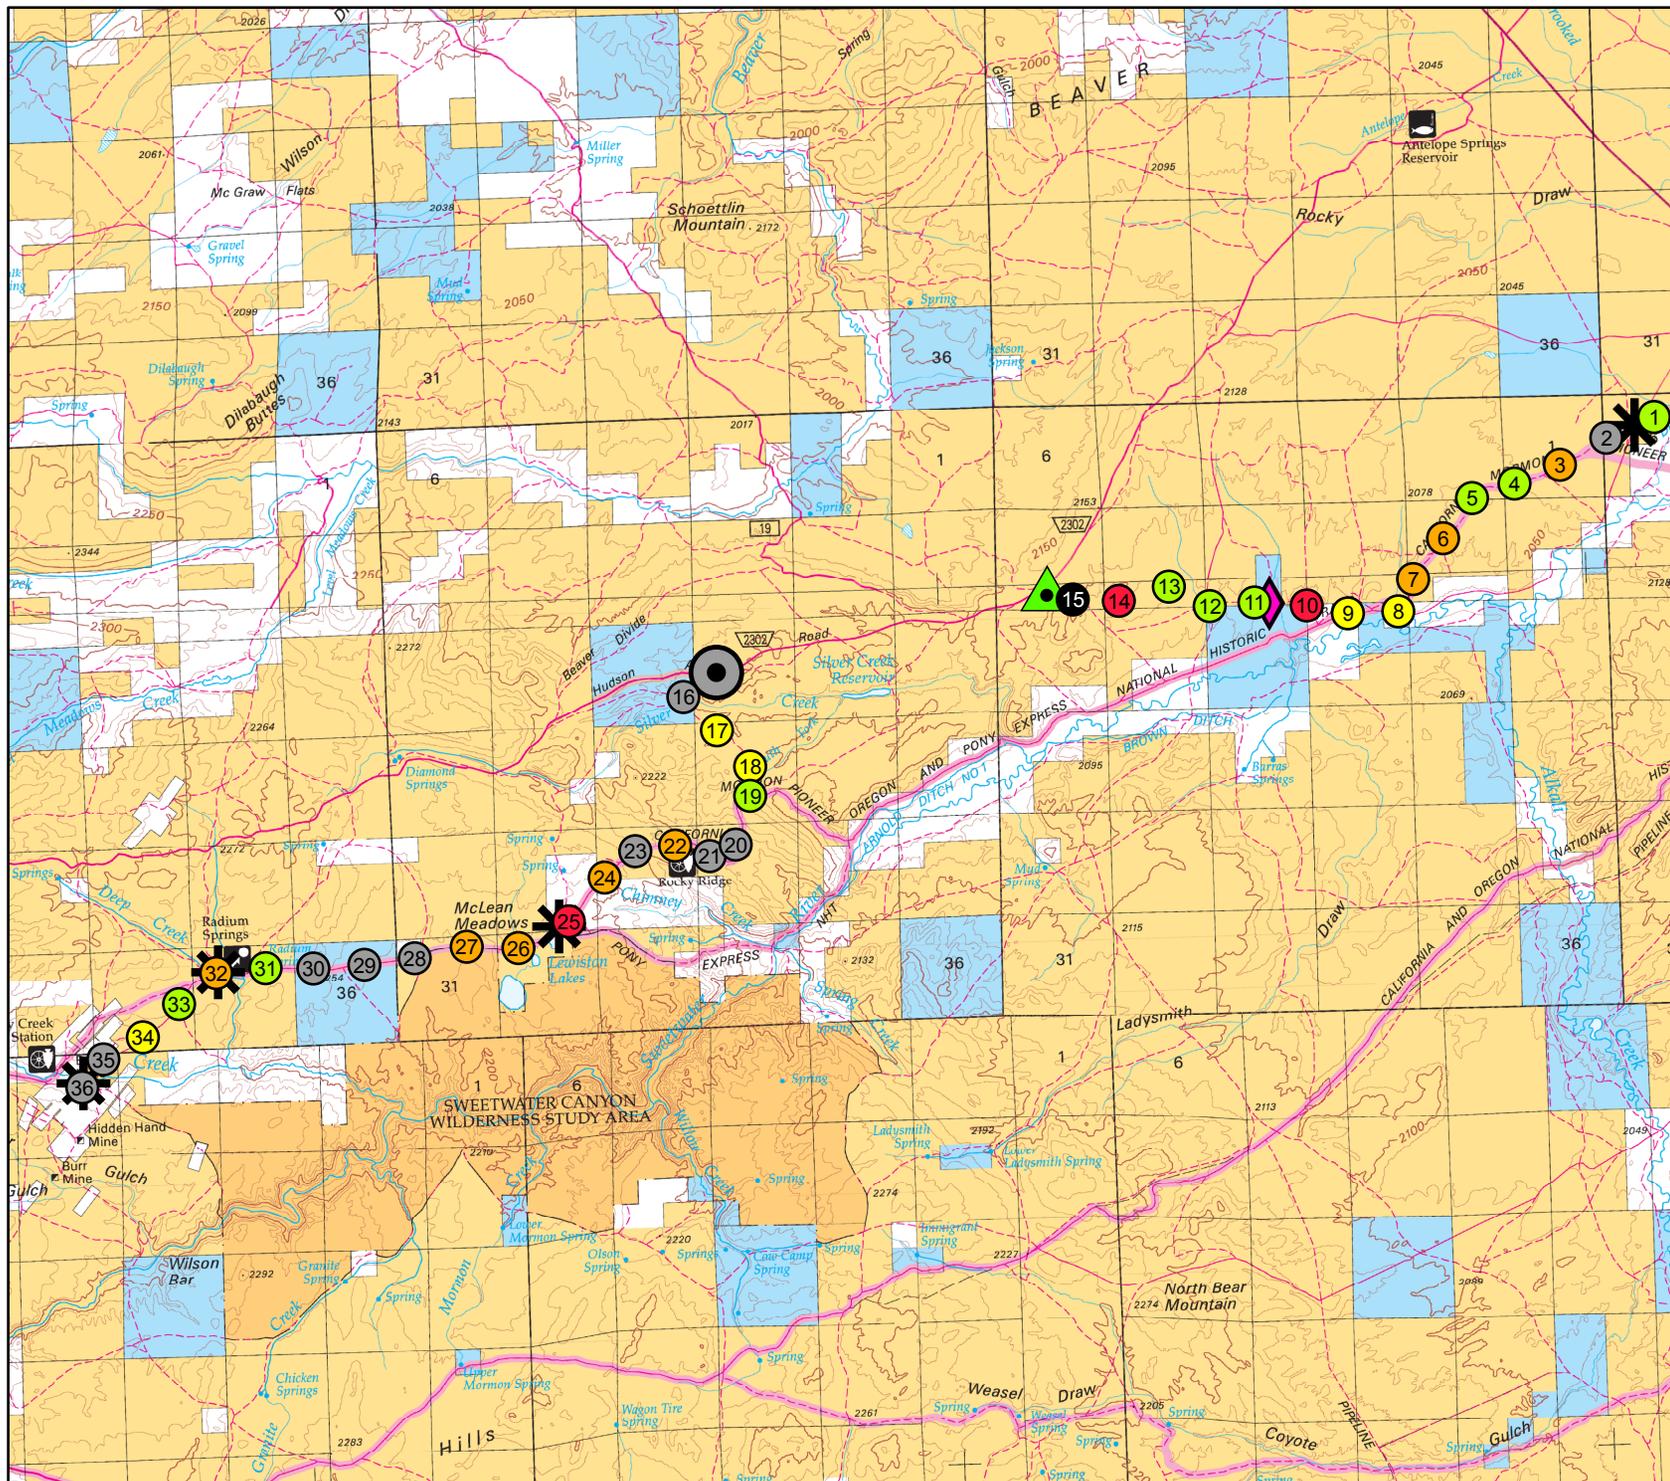

Legend

Monitoring Point and Results

- Desirable Trend No Annual Trek Impact
- Desirable Trend Annual Trek Impact
- Stable Trend Annual Trek Impact
- Stable Trend No Annual Trek Impact
- Undesirable Trend Annual Trek Impact
- Undesirable Trend No Annual Trek Impact

Support and Restroom Locations


- On NHT Support/Restroom
- Off NHT Restroom
- Off NHT Support
- Off NHT Vehicle Parking



Date: 7/2/2015

No warranty is made by the Bureau of Land Management (BLM) for use of the data for purposes not intended by BLM.

Map 6: Average Height of Trail Vegetation

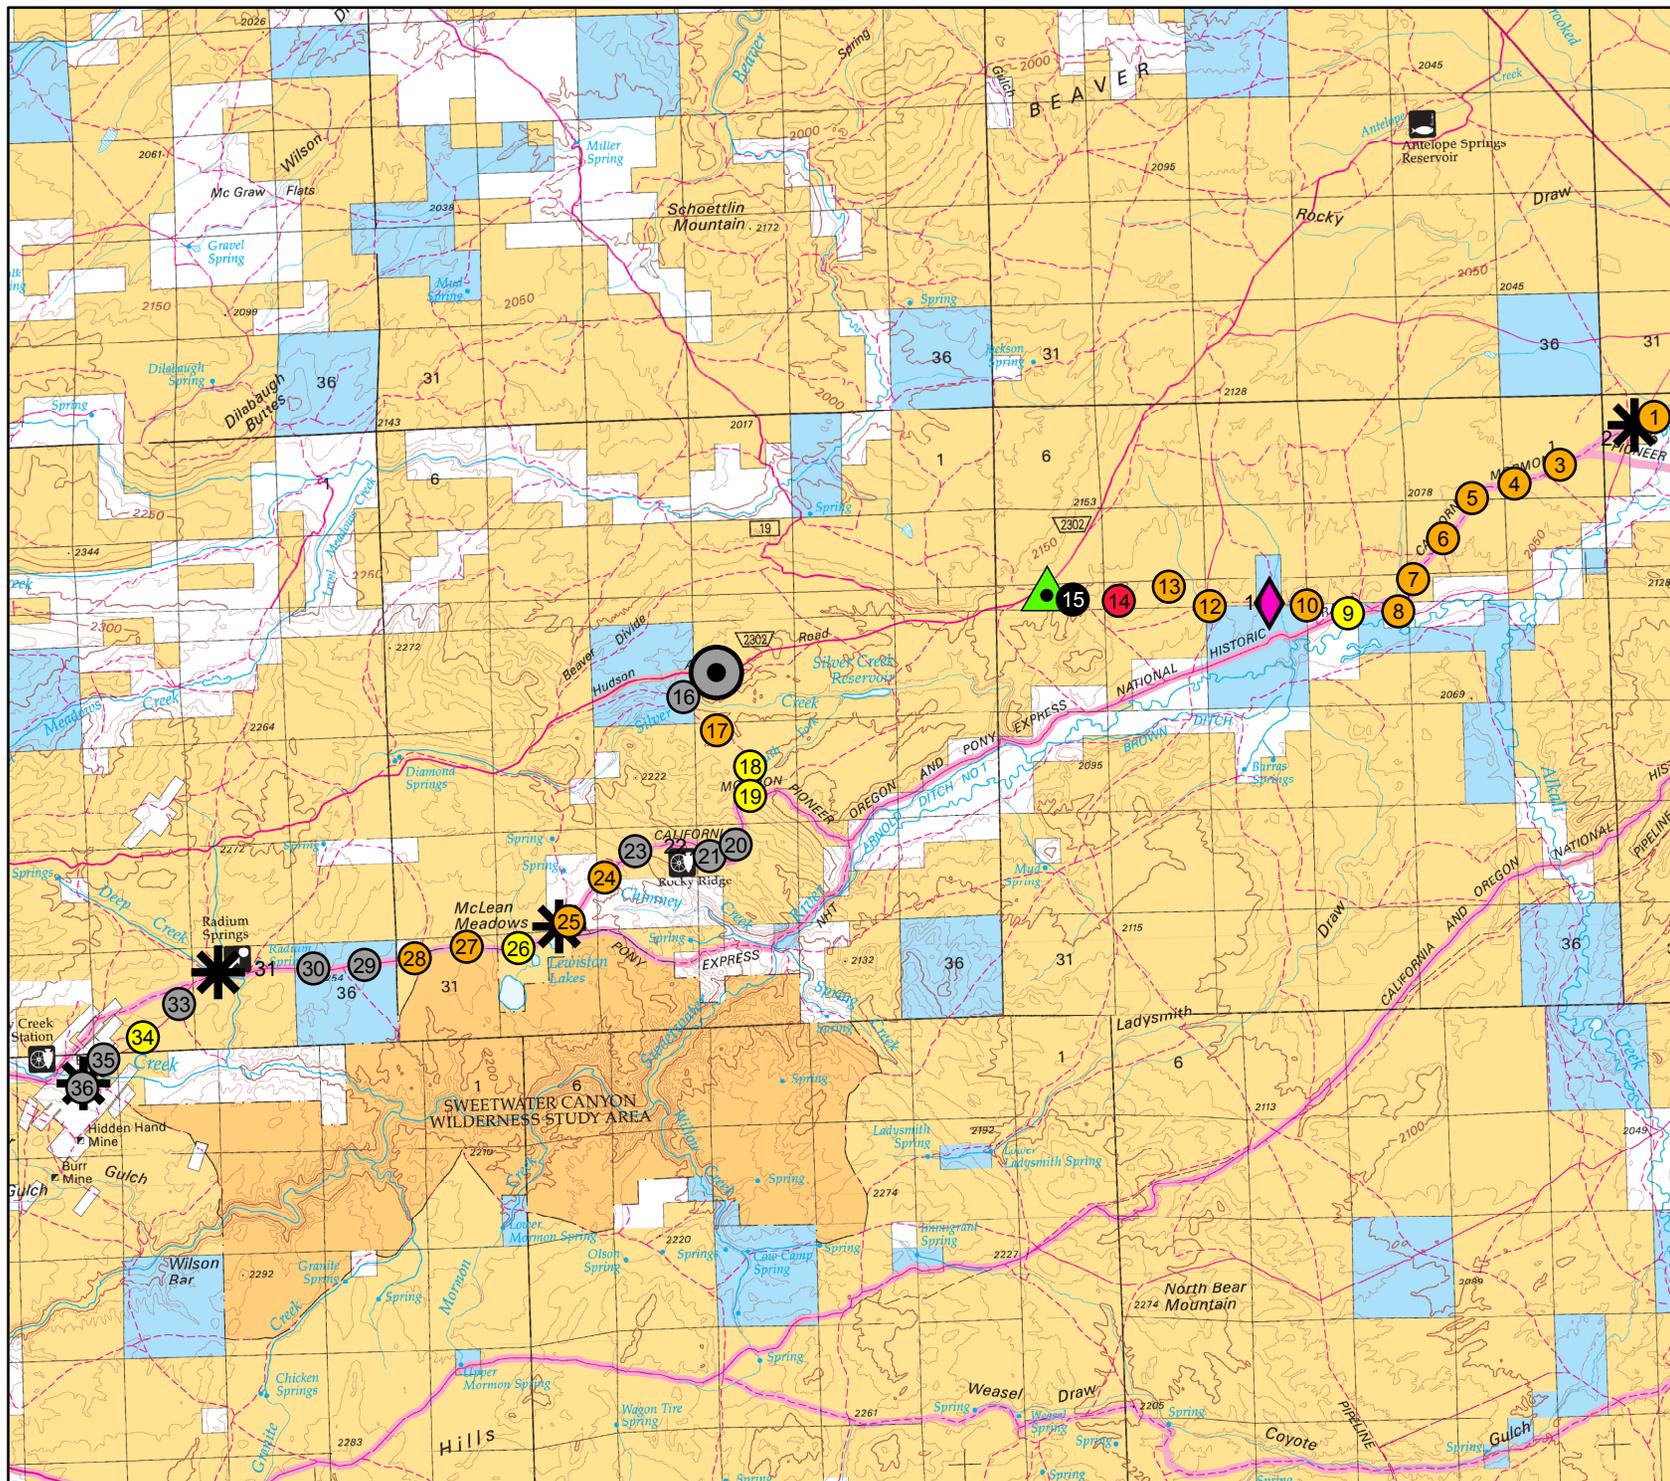

Legend

Monitoring Point and Results

- Desirable Trend No Annual Trek Impact
- Desirable Trend Annual Trek Impact
- Stable Trend Annual Trek Impact
- Stable Trend No Annual Trek Impact
- Undesirable Trend Annual Trek Impact
- Undesirable Trend No Annual Trek Impact

Support and Restroom Locations

- On NHT Support/Restroom
- Off NHT Restroom
- Off NHT Support
- Off NHT Vehicle Parking



Date: 7/2/2015

No warranty is made by the Bureau of Land Management (BLM) for use of the data for purposes not intended by BLM.

**Attachment B- An Aerial-Photographic Assessment of Reenacted
Handcart Treks on a Section of the Mormon Pioneer National Historic
Trail, Fremont County, Wyoming**

An Aerial-Photographic Assessment of Reenacted Handcart Treks on a Section of the Mormon Pioneer National Historic Trail, Fremont County, Wyoming

Prepared in cooperation with Bureau of Land Management



Scientific Investigations Report 2008–5115

Cover photographs: Scenes along the historic Mormon Pioneer Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming. For use or reproduction permission please contact: Cameron L. Aldridge, Fort Collins Science Center, Fort Collins, CO, 80526 E-mail cameron_aldridge@usgs.gov. 970-226-9433.

An Aerial-Photographic Assessment of Reenacted Handcart Treks on a Section of the Mormon Pioneer National Historic Trail, Fremont County, Wyoming

By Robert R. McDougal, Robert G. Waltermire, Cameron L. Aldridge,
Stephen S. Germaine, Scott E. Nielsen, Charlene C. Nielsen, Leanne Hanson,
and Zachary H. Bowen

Prepared in cooperation with Bureau of Land Management

Scientific Investigations Report 2008–5115

U.S. Department of the Interior
U.S. Geological Survey

U.S. Department of the Interior
DIRK KEMPTHORNE, Secretary

U.S. Geological Survey
Mark D. Myers, Director

U.S. Geological Survey, Reston, Virginia: 2008

For product and ordering information:

World Wide Web: <http://www.usgs.gov/pubprod>

Telephone: 1-888-ASK-USGS

For more information on the USGS—the Federal source for science about the Earth, its natural and living resources, natural hazards, and the environment:

World Wide Web: <http://www.usgs.gov>

Telephone: 1-888-ASK-USGS

Any use of trade, product, or firm names is for descriptive purposes only and does not imply endorsement by the U.S. Government.

Although this report is in the public domain, permission must be secured from the individual copyright owners to reproduce any copyrighted materials contained within this report.

Suggested citation:

McDougal, R.R., Waltermire, R.G., Aldridge, C.L., Germaine, S.S., Nielsen, S.E., Nielsen, C.C., Hanson, Leanne, and Bowen, Z.H., 2008, An Aerial-Photographic Assessment of Reenacted Handcart Treks on a Section of the Mormon Pioneer National Historic Trail, Fremont County, Wyoming: U.S. Geological Survey Scientific Investigations Report 2008–5115, 70 p.

Contents

Abstract.....	1
Introduction	2
Purpose and Scope	2
Study Area	3
Physical Setting.....	3
Geologic Setting.....	3
Methods of Investigation.....	3
Photo Acquisition and Orthorectification	3
Delineation of Historic Trail and Trekker-Use Area.....	6
Classification of Imagery to Bare-Ground Estimates	6
Trail-Use Data	6
Sampling Design and Analyses	6
Results	11
Trekker-Use Data	11
Depiction of Trail and Other Spatial Data	11
Effects of Trekkers on Bare Ground.....	11
Patterns in Trail Width by Trekkers.....	15
Patterns of Bare Ground On and Off the Trail by Mormon Handcart-Use Intensity.....	15
Patterns of Bare Ground by Concentrated-Use Areas.....	19
Discussion.....	19
Study Limitations.....	21
Management Considerations	21
Summary.....	21
Acknowledgments.....	22
References Cited.....	22
Appendix 1. Aerial Photograph Acquisition and Ground-Control GPS Details	25
Appendix 2. Orthorectification and External Orientation Standard Operating Procedures	36
Appendix 3. Photo Orthorectification: Bundle Adjustment, Color Balance, Mosaicking.....	51
Appendix 4. Delineation of the Trail and Trekker-Use Areas	54
Appendix 5. Classification of Imagery to Bare-Ground Estimates.....	57
Appendix 6. Details of Datasets and Statistical Analyses.....	61

Figures

1. Map showing the Mormon Pioneer National Historic Trail study area, which extends 40 kilometers west from Sixth Crossing to Rock Creek Hollow, Fremont County, Wyoming.....	4
2. Map showing the Mormon Pioneer National Historic Trail alignment and Mormon handcart-trekking route between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming.....	5
3. An example of the transition from color aerial photographs (top row) to ERDAS (Earth Resources Data Analysis System) bare-ground class assignments.....	7
4–8. Maps showing:	
4. (a) Half-day, one-day, and two-day trekker routes; and four levels of trekker-use intensity (b) along the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming, 2001 to 2006.....	8
5. Example of perpendicular transect placement on aerial photographs of the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming.....	9
6. Motorized use on the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming.....	10
7. Location of nine concentrated-use areas along the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming.....	12
8. Concentrated-use and random area polygons within which the percentage of bare ground versus vegetated ground were summed.....	13
9–16. Graphs showing:	
9. Cumulative number of Mormon trekkers in each of three use levels on the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming, 2001 to 2006.....	14
10. Average trail-width values for five Mormon handcart-use intensity levels on the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming, 2006.....	15
11. Average percentage of bare ground by category of Mormon handcart use and distance from trail center along the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming.....	16
12. Percentage of bare ground among five Mormon handcart-use intensity levels and three distances from trail center between Sixth Crossing and Rock Creek Hollow, Mormon Pioneer National Historic Trail, Fremont County, Wyoming.....	17
13. Difference in percentage of bare ground associated with Mormon handcart-use activity by distance from trail center between Sixth Crossing and Rock Creek Hollow, Mormon Pioneer National Historic Trail, Fremont County, Wyoming.....	17
14. Predicted probability of bare ground plus the standard error (SE) based on handcart use level and distance from trail center, adjusted for soil and photo image effects between Sixth Crossing and Rock Creek Hollow, Mormon Pioneer National Historic Trail, Fremont County, Wyoming.....	18

15. Predicted differences in percentage of bare ground between control and handcart-use sites at trail center and 1 meter distance from trail center, after accounting for soil and photo image variation between Sixth Crossing and Rock Creek Hollow, Mormon Pioneer National Historic Trail, Fremont County, Wyoming	19
16. Percentage of bare ground present at concentrated-use and random sites along the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming.....	20

Tables

1. Estimated number of handcart users along three distinct reenactment routes.....	14
2. Average percentage of bare ground in five Mormon handcart-use intensity levels and three distance classes from trail center along the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming	16
3. Logistic regression results describing the probability of being classified bare ground along the Mormon Pioneer National Historic Trail at two on-trail distances from trail center (0 and 1 meters) between Sixth Crossing and Rock Creek Hollow, Mormon Pioneer National Historic Trail, Fremont County, Wyoming	18

An Aerial-Photographic Assessment of Reenacted Handcart Treks on a Section of the Mormon Pioneer National Historic Trail, Fremont County, Wyoming

By Robert R. McDougal,¹ Robert G. Waltermire,² Cameron L. Aldridge,³ Stephen S. Germaine,² Scott E. Nielsen,⁴ Charlene C. Nielsen,⁴ Leanne Hanson,² and Zachary H. Bowen²

Abstract

Reenactments of historical pioneer emigrations have increased in popularity since the celebration of these events during the United States bicentennial in 1976. From 1999 to 2006, approximately 70,000 Mormon trekkers traveled the Mormon Pioneer National Historic Trail (hereinafter referred to as the Trail) segment between Sixth Crossing and Rock Creek Hollow in Fremont County, Wyoming. Recent elevated levels of use have raised concerns over potential recreation-related damage to this particularly scenic segment of the Trail.

In 2006, the Bureau of Land Management (BLM) contracted the U.S. Geological Survey (USGS) to conduct an aerial-photographic assessment of the condition of the Trail between Sixth Crossing and Rock Creek Hollow. Specifically, the USGS was to assess trail conditions for this segment as influenced by handcart use (low, medium, and high intensity of use) and concentrated activities associated with trekking (toilet, rest, and camp sites).

In June 2006, high-resolution (10 centimeter) color aerial photography was collected for the 40-kilometer trail segment between Sixth Crossing and Rock Creek Hollow. Annual numbers of trekkers for three different handcart-use levels were estimated for Trail segments based on the BLM Lander Field Office records. The Trail centerline, trail edges, and boundaries of concentrated use (toilet and rest) areas were digitized in a Geographic Information System (GIS) based on aerial imagery, and a bare-ground classification was conducted using spectral imaging software. To assess the effects of

handcarts, the relation between trail width and on-trail patterns in classified bare ground to three levels of handcart use was modeled, while accounting for local confounding factors including soil type and topographic attributes. The amount of bare ground at concentrated use areas also was compared to random trailside (control) sites to assess the magnitude of vegetative disturbance.

By using interpretation of the digital air-photo image, the precision and accuracy of the Trail alignment between Sixth crossing and Rock Creek Hollow were notably improved. No visible effects of handcart trekking on trail width were noted, and there were only minimal increases in bare ground on trails due to handcart trekking. At most, it appears that handcart activities increase the total amount of bare soil by approximately 9 percent after controlling for confounding factors. No obvious thresholds among levels (low, medium, and high) of handcart use were apparent. Although handcart activity only marginally increased amounts of bare ground on the Trail, motor vehicle traffic appears to have historically controlled and continues to affect trail width and vegetative loss. The results of this study indicate a 42- to 60-percent increase in bare ground relative to the average incidence of bare ground present off the trail (≥ 2 meters from trail centerline \bar{x} = 15.1 percent bare ground). Finally, seven of nine concentrated use areas had substantially more bare ground (\bar{x} = 45.0 percent) than random sites (\bar{x} = 20.7 percent). The nine concentrated use areas ranged from 46 to 7,237 square meters in area.

Based on these results, there are identifiable management considerations. Toilet and rest sites need to be carefully located relative to where sensitive vegetation or soils occur. The analyses presented here indicate that limiting motorized vehicle use needs to be a priority over that of adjusting the number of trekkers. Additionally, monitoring of the Trail from Sixth Crossing to Rock Creek Hollow segment needs to consider explicit management targets, such as minimum acceptable levels of bare ground or trail width, and the establishment of permanent monitoring plots to evaluate targets and measure responses to altered management activities.

¹U.S. Geological Survey, Denver, CO 80225.

²U.S. Geological Survey, Fort Collins Science Center, Fort Collins, CO 80526.

³Natural Resource Ecology Laboratory, Colorado State University, and U.S. Geological Survey, Fort Collins Science Center, Fort Collins, CO 80526.

⁴Arctic Slope Regional Corporation Management Services, contracted to: U.S. Geological Survey, Fort Collins Science Center, Fort Collins, CO 80526.

Introduction

As a result of the 1803 Louisiana Purchase, the United States nearly doubled in size. Oregon, Washington, and Idaho were still British Territories, but Americans were anxious to settle the new region. Over the preceding century, hundreds of thousands of migrants entered the American West along four major routes: the California, Mormon Pioneer, Pony Express, and Oregon Trails. From central Nebraska to central Wyoming, the four trails followed approximately the same route (National Park Service, 1999). Trail use diminished by 1870 when the Union Pacific Railway Company completed the first transcontinental railway. Despite a substantial decrease in use, these trails still were used as a secondary transportation corridor well into the early 1900s. Today (2008), these historic trails have been given a National Historic Trail designation, which recognizes their significance in America's history (National Park Service, 1999).

Travel along the Mormon Pioneer National Historic Trail (hereinafter "the Trail") was begun by the Brigham Young Pioneer Company in 1846, and by 1869, about 70,000 members of The Church of Jesus Christ of Latter-Day Saints (hereinafter referred to as Mormons or the Mormon Church) had traveled the 2,087-kilometer-long trail from Nauvoo, Illinois, to Salt Lake City, Utah (National Park Service, 2007). Initially, the Brigham Young Pioneer Company led the first group of Mormon trekkers west to Omaha, Nebraska, where they overwintered before continuing west through Wyoming in 1847. Brigham Young was a member of this party, leading 148 Mormon pioneers and 72 wagons to their new home in the Salt Lake Valley (National Park Service, 2007). Along the way, trail markers, ferries, bridges, and supply stations were established to aid future Mormon emigrants. As the Mormon Church grew, immigrants from Europe used handcarts to carry their belongings as they traveled west along the trail. Handcarts could be pushed or pulled, were inexpensive, easier to maneuver and faster than stock-drawn wagons, and could carry as much as 227 kilograms. Ten handcart companies assisted nearly 3,000 people across the Great Plains between 1856 and 1860 (National Park Service, 1999).

A substantial increase in public use of Historic Trails occurred during the 1976 U.S. Bicentennial wagon train reenactment and the subsequent 1990, 1993, 1997, and 1999 reenactments (Bureau of Land Management, 2004). The Trail began to receive even greater use as the Mormon Church became increasingly interested in conducting handcart reenactment treks in the Fremont County area of Wyoming in 1999. From 2001 through 2006, 70,000 trekkers participated in pioneer handcart reenactments along the Rocky Ridge area of the Trail in Wyoming (Jared Oakleaf, BLM Lander Wyoming Field Office, unpub. data, 2007). Because of its scenic value and high potential to afford modern users an opportunity to vicariously share the experience of the original migrants, this trail segment has been designated a high-potential Trail segment (National Park Service, 1999). Recent increased

recreational use in the Rocky Ridge area of the Trail has raised concern about the potential for wagons, handcarts, and motorized support vehicles to adversely affect Trail resources (Bureau of Land Management, 2004).

The Bureau of Land management (BLM) is the administering agency for the Trail through much of Wyoming. To make sound decisions about compatible use, the BLM managers require quantitative information relating trail use with resource condition that will inform management decisions on sustainable levels of Trail use. There is a clear need, therefore, to understand the effects of Mormon Pioneer trek reenactments on the Trail and to develop defensible levels of use that will allow the Trail to remain in a relatively unaffected state.

In an effort to manage increased levels of trail use, the BLM began issuing Special Recreation Permits (SRP) "as a means to manage visitor use and protect recreation and other resources, while minimizing adverse resource and cultural impacts, and to reduce user conflicts" (Bureau of Land Management, 2004). In 2005, BLM issued an SRP to the Latter Day Saints (LDS) Farm Management Company for the use of BLM lands between Sixth Crossing and Rock Creek Hollow for handcart treks from June 15 through September 15. A total of 7,500 people (hereinafter "trekkers") per season were allowed under this SRP, with a maximum of 200 people per trek group. The SRP also established guidelines for support vehicles, staging areas, and portable toilets. Additionally, it outlined a monitoring plan to assess effects on wildlife, vegetation, soils, route widening, invasive/alien species, cultural artifacts, and conflicts with private landowners and other trail visitors (Bureau of Land Management, 2005).

The Mormon Pioneer Historic Trail Management and Use Plan Update and Final Environmental Impact Statement (National Park Service, 1999) defines "significant resources" as areas of historical significance, visible historical remnants, above-average scenic quality, or areas having relative freedom from intrusion. The Environmental Assessment addressing the SRP to conduct handcart trek reenactments along the Trail between Sixth Crossing and Rock Creek Hollow states that all historical sites and cross-country trail segments will be managed to protect significant resources; uses that are incompatible with historical preservation of trail sites and segments will be monitored and, if necessary, will be made to become compatible (Bureau of Land Management, 2004).

Purpose and Scope

The goal of this project was to provide the BLM with a quantitative description of the effects of reenacted Mormon handcart treks on vegetative condition along a 40-km section of the Trail between Sixth Crossing and Rock Creek Hollow in Wyoming. Currently, no quantitative baseline exists with which to develop management guidelines and to address

potential effects of handcart trekking on the Trail. The purpose of this study was to provide BLM with an assessment of the effects of trekkers on vegetative cover conditions by comparing on- and off-trail locations through comparisons of handcart-traffic intensities using high-resolution aerial photography.

Study Area

The 40-km segment of the Trail that extends from the Sixth Crossing of the Sweetwater River to Rock Creek in Fremont County, Wyoming, is an area that has substantial seasonal use by Mormon handcart reenactments (fig. 1). The study area extent is bounded in the northeast near the Sweetwater Station at long 108°11'2.1" W., lat 42°31'57.3" N. and the confluence of the Sweetwater River and Rock Creek at long 108°37'26.4" W., lat 42°26'27.4" N. in the southwest (fig. 2).

Physical Setting

The study area is predominately sagebrush-steppe inter-mixed with desert shrubland and is represented by high desert ecosystems with elevations ranging from 1,859 to 2,195 m. Precipitation in the form of spring rains and winter snowfall ranges from 20.3 to 35.6 cm per year (Roberts, 1989). Summer thunderstorms are common and can contribute substantial amounts of precipitation over short periods. Temperatures reach -18°C in winter and approach 37°C during summer.

Dominant vegetation includes Wyoming big sagebrush (*Artemisia tridentata* subspecies *wyomingensis*) and Basin big sagebrush (*A. t.* subspecies *tridentata*) overstory, under which western wheatgrass (*Pascopyrum smithii*), bluebunch wheatgrass (*Pseudoroegneria spicata*), Indian ricegrass (*Achnatherum hymenoides*), needle-and-thread grass (*Stipa comata*), indian paintbrush (*Castilleja angustifolia*), buckwheat (*Eriogonum* spp.), and evening primrose (*Oenothera caespitosa*) grow. Several species of invasive nonnative plants such as cheatgrass (*Bromus tectorum*) and leafy spurge (*Euphorbia esula*) are common in the study area (Bureau of Land Management, 2004) and may respond positively to trail disturbances. Along the Sweetwater River are riparian zones and wet meadows containing sedges (*Carex* spp.), rushes (*Juncaceae* spp.), willow (*Salix* spp.), chokecherry (*Prunus virginiana*), and inland saltgrass (*Distichlis spicata*) (Bureau of Land Management, 2004).

Common wildlife include pronghorn (*Antilocapra americana*), mule deer (*Odocoileus hemionus*), and moose (*Alces alces*); raptors such as ferruginous hawk (*Buteo regalis*), Swainson's hawk (*Buteo swainsoni*), and golden eagle (*Aquila chrysaetos*) also occur. Known sensitive species include sage thrasher (*Oreoscoptes montanus*), loggerhead shrike (*Lanius ludovicianus*), Brewer's sparrow (*Spizella breweri*), sage sparrow (*Amphispiza belli*), greater sage-grouse

(*Centrocercus urophasianus*), mountain plover (*Charadrius montanus*), northern leopard frog (*Lithobates pipiens*), and boreal toad (*Bufo boreas*) (Bureau of Land Management, 2004). Domestic livestock, including cattle and horses, graze on private and public lands along the Trail.

Geologic Setting

Much of the soils in the study area derive from Tertiary claystones, sandstones, and conglomerate. However, diverse rock types exist along the Trail, ranging in age from Quaternary alluvium and colluvium to Precambrian granite and metasediment (Love and Christiansen, 1985). East of Rocky Ridge, outcrops and soils are derived from the Oligocene White River Formation (Love and Christiansen, 1985). Rocky Ridge, the highest point on the Trail, is composed of older rocks including the Cambrian Flathead Sandstone, Permian Phosphoria Formation, and the Upper Mississippian Madison Limestone. Precambrian metavolcanics, metasediments, and granite also are present in the vicinity of Rocky Ridge (Love and Christiansen, 1985).

To the west of Rocky Ridge is a mix of Miocene sedimentary rocks including arkosic sandstone, conglomerate, siltstone, and claystone. Outcrops of granitic and metamorphic rocks occur farther west. Soils in the western part of the study area contain more organic-rich material than those in the eastern part. Lowland areas of seasonably wet soils support a variety of grasses and herbs (Love and Christiansen, 1985).

Methods of Investigation

The following sections describe the methods used to assess the effects of handcart reenactments on the Trail. The methods include aerial photo acquisition and orthorectification, GIS Trail delineation, bare-ground estimates, and statistical analysis of Trail-use data.

Photo Acquisition and Orthorectification

High-resolution (10-cm) true-color aerial photographs of the studied trail segment were collected during June 2006 by Aero-metric, Inc., of Fort Collins, Colorado. Two hundred and nine frames of photographs were required to completely cover the study area (Appendix 1). Digitally scanned aerial photographs were orthorectified using OrthoMapper® software (Image Processing Software, Inc., 2007). The external orientations for control-point referencing were completed using National Agriculture Imagery Program (NAIP) mosaicked orthophotos, which were acquired in 2006. Subsequent OrthoMapper processing steps included automated aerotriangulation, manual inspection of all tie points, and bundle orthorectification that processes groups of aerial photographs simultaneously. Tie points between

4 Aerial-Photographic Assessment of the Mormon Pioneer National Historic Trail, Fremont County, Wyoming

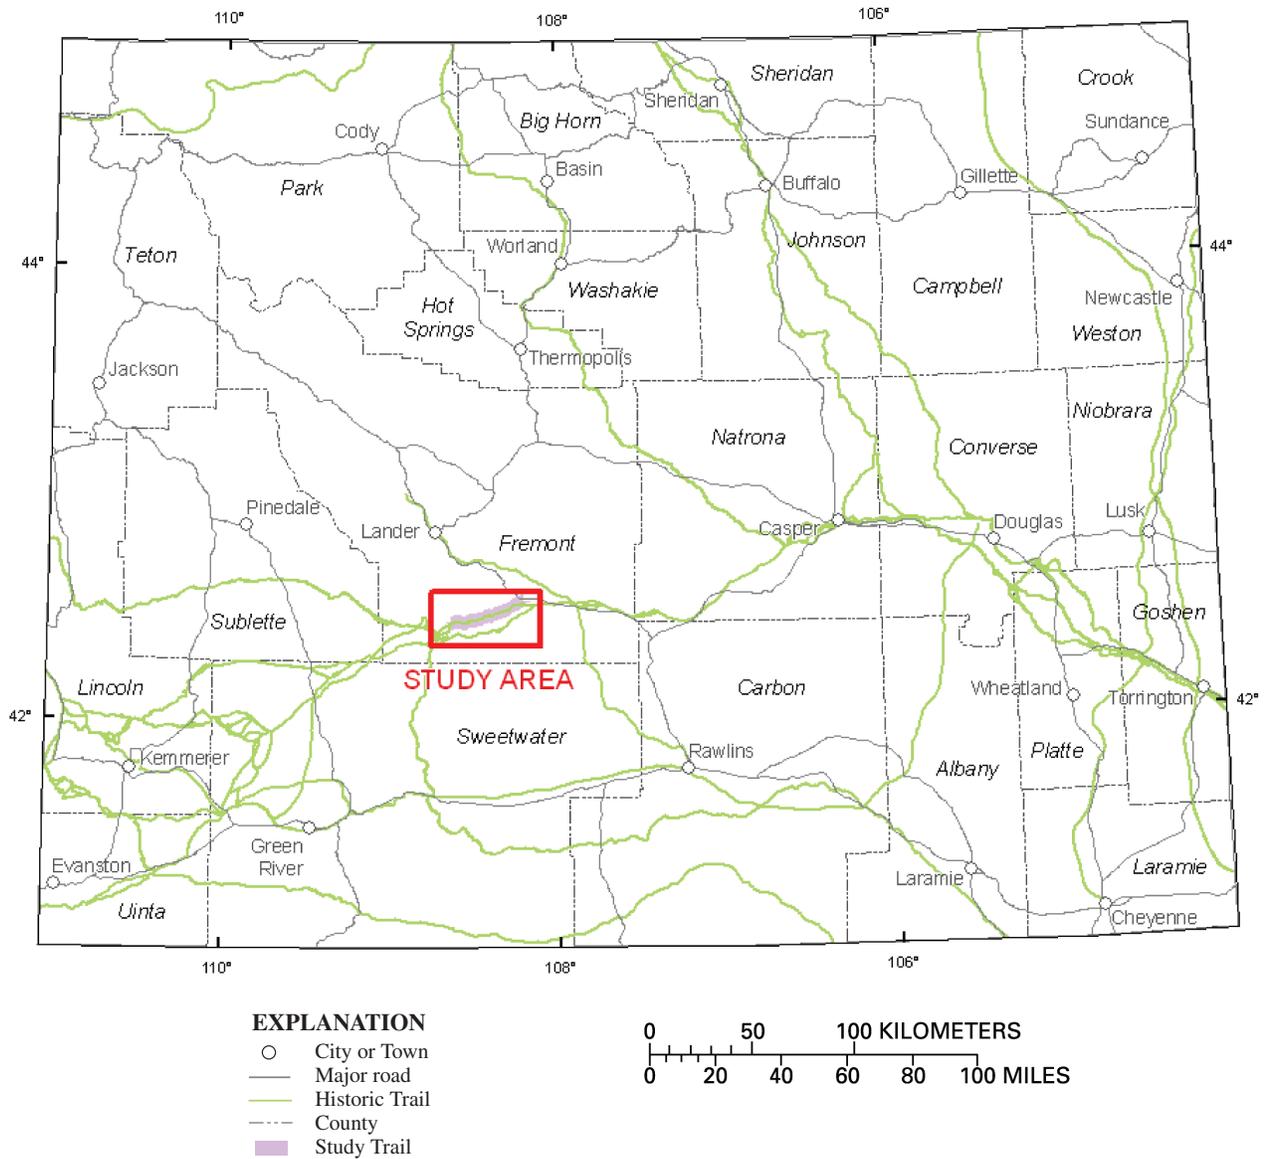


Figure 1. Mormon Pioneer National Historic Trail study area, which extends 40 kilometers west from Sixth Crossing to Rock Creek Hollow, Fremont County, Wyoming.

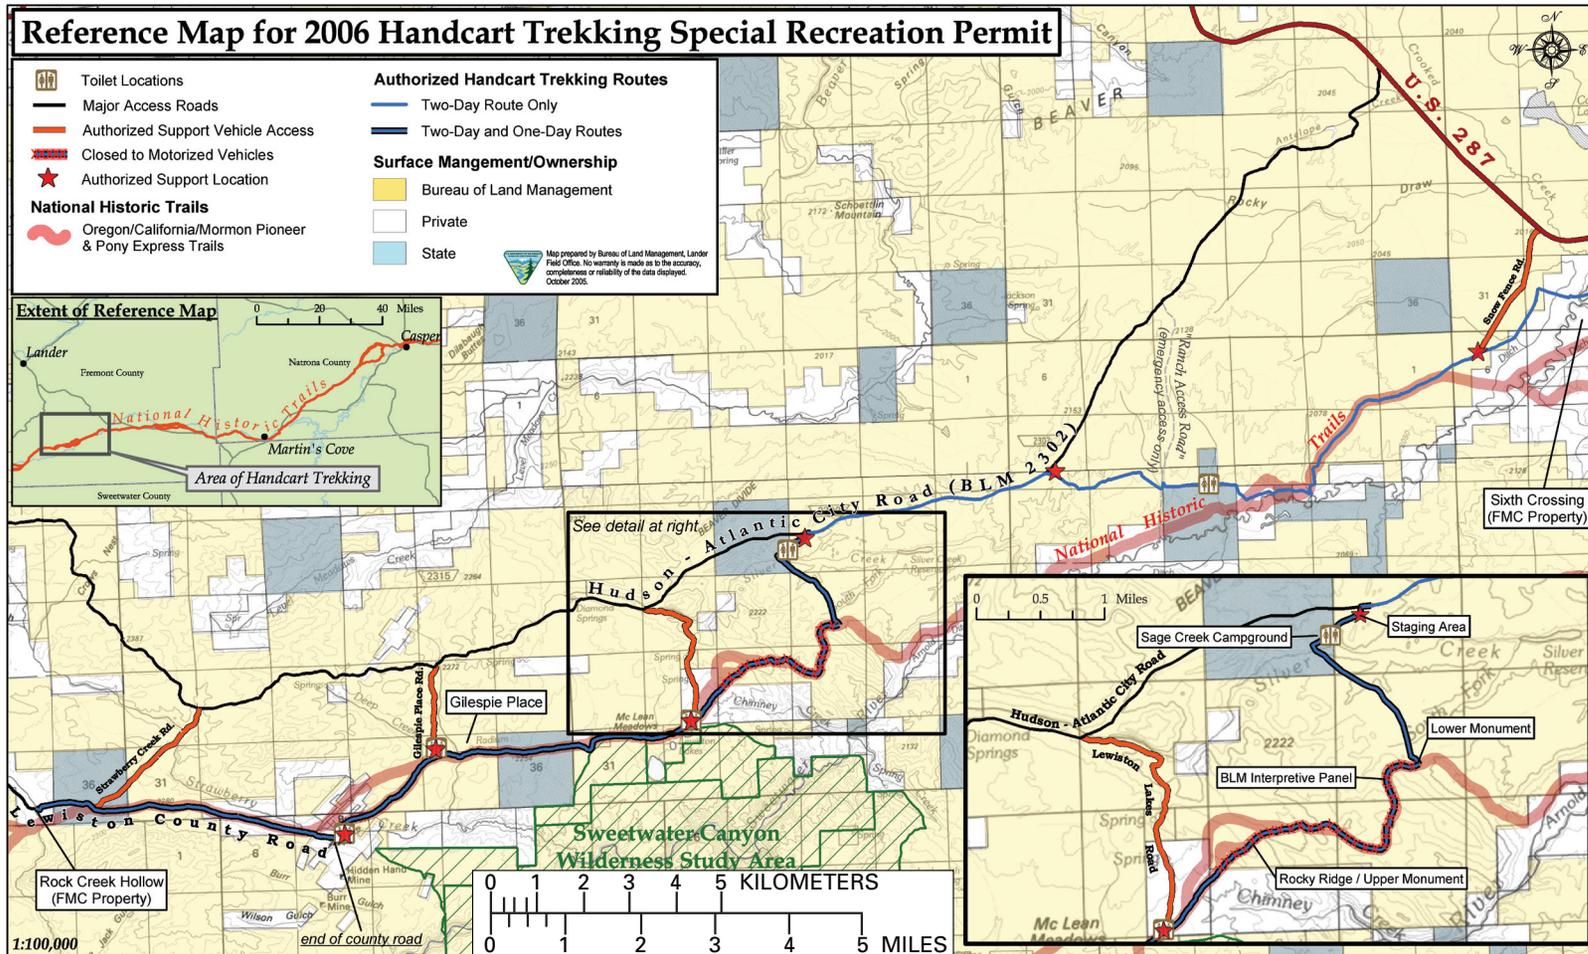


Figure 2. Mormon Pioneer National Historic Trail alignment and Mormon handcart-trekking route between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming.

overlapping aerial photos were used to increase the accuracy of the mosaicking (Appendix 2). The internal (designation of aerial photograph fiducials) orientation for the project referenced the U.S. Geological Survey Report of Calibration for Aerial Mapping Camera (Appendix 2). Nodata portions of each orthorectified aerial photograph were removed, color/tone balance was applied, and the resulting digital orthophotos were mosaicked in groups to avoid TIFF (tagged image file format) size restrictions (Appendix 3). Survey-grade global positioning system (GPS) ground data were collected (see Appendixes 2 and 3) to estimate the spatial accuracy of both the reference NAIP orthophotos and the orthophotos produced for this project.

Delineation of Historic Trail and Trekker-Use Area

Applicable roads and trails were digitized as arcs from the digital orthophotos in ERDAS Imagine (ERDAS Imagine, 2006) and attributed in ArcGIS (Environmental Systems Research Institute, 2006). Attribute items in the digitized file included the Trail alignment, handcart trek routes, and other trail and road alignments. For the Trail and handcart routes, confidence was assessed (none, low, moderate, high, or unknown) as to whether or not the arc was part of the Trail or trekker routes. Historical and trekker routes in the geographic information system (GIS) were delineated using spatial data provided by the BLM. Trail delineation and confidence levels were verified with the BLM Lander Field Office recreation planning and archeology staff. Final vectors of the trails were buffered by 110 m for subsequent assessments of possible trekker effects. Because of the size of the images, the study area digital orthophotos were divided into 19 sections for which final image products were generated for analysis and display (Appendix 4).

Classification of Imagery to Bare-Ground Estimates

All 19 sections of imagery were processed with ERDAS Imagine using the unsupervised classification algorithm (ISODATA) to produce 60 reflectance classes. A Maximum Likelihood classifier was used to refine the spectral and spatial output and classify signature values into either a high or moderate likelihood of being bare ground (fig. 3). All image files were exported to ESRI GRID format for spatial analysis (Appendix 5).

Trail-Use Data

Data on Trail use by trekkers were obtained along sections of the Trail from the BLM Lander Field Office for 2001 through 2006, the period over which use records have

been kept. Numbers include “best” estimates of actual use along the 40-km Trail section studied. These estimates are based on reports from the LDS Farm Management Company on their use under SRPs, and on the BLM anecdotal records of casual trekkers and nonchurch-related recreational use. Number of trekkers were categorized by route, including: (1) half-day users making a return trip from the Sage Creek Camp site through the Lower Monument to the Upper Monument on Rocky Ridge, (2) two-day trekkers traveling from Sixth Crossing through to Rock Creek Hollow, and (3) one-day trekkers traveling from Sage Creek Camp to Rock Creek Hollow (fig. 4). Sections of the Trail that were not trekker routes were assumed to have no use by trekkers. Trekker use was categorized as low (Sixth Crossing to Sage Creek), moderate (Rocky Ridge to Rock Creek Hollow), high (Lower Monument to Rocky Ridge), or no use (all unused sections of the Trail) based on mean use per year. Because half-day trekkers returned along the same section of trail in most years, the number of half-day users was doubled to represent twice the actual foot and handcart traffic.

Sampling Design and Analyses

In order to determine trail width, 200-m transects were generated centered on and perpendicular to the trail centerline, with 30-m spacing between transects (fig. 5). At each transect, trail width was measured in ArcGIS using digitized trail boundaries. Trail edges were interpreted and digitized after visual inspection of the aerial photographs in ArcGIS. Bare-ground estimates were sampled in ArcGIS at 1-m spacing along transects originating at the trail center (for example, 1 observation at the centerline and 100 observations in each direction perpendicular to the centerline). At each sample plot, distance from trail center and transect identity were recorded, and presence (1) or absence (0) of bare ground for that 10-cm pixel (using only the high-confidence classification) and trekker-use level noted. In addition to levels of trekker use, data were summarized within a “no trekker use but motorized-vehicle access-allowed” category and a “no trekker use but no motorized access” category (fig. 6). All trail segments were excluded that were associated with the graded Lewiston County Road, and only the remaining Trail segments with high confidence of trekker use and location accuracy were considered for analysis. In addition to factors associated with Trail location and Mormon handcart use, a suite of sampling and environmental contributing factors were considered including soils, terrain, and the identification of the orthophoto section.

For analyses of trail width, the mean \pm Standard Deviation (SD) trail width by trekker-use category was reported, and generalized linear models (family Gaussian and link identity) were used to identify whether differences existed in trail width among trekker use categories (StataCorp, 2007). Effects on the Trail were assessed by comparing the proportion of bare ground present among use categories and distances

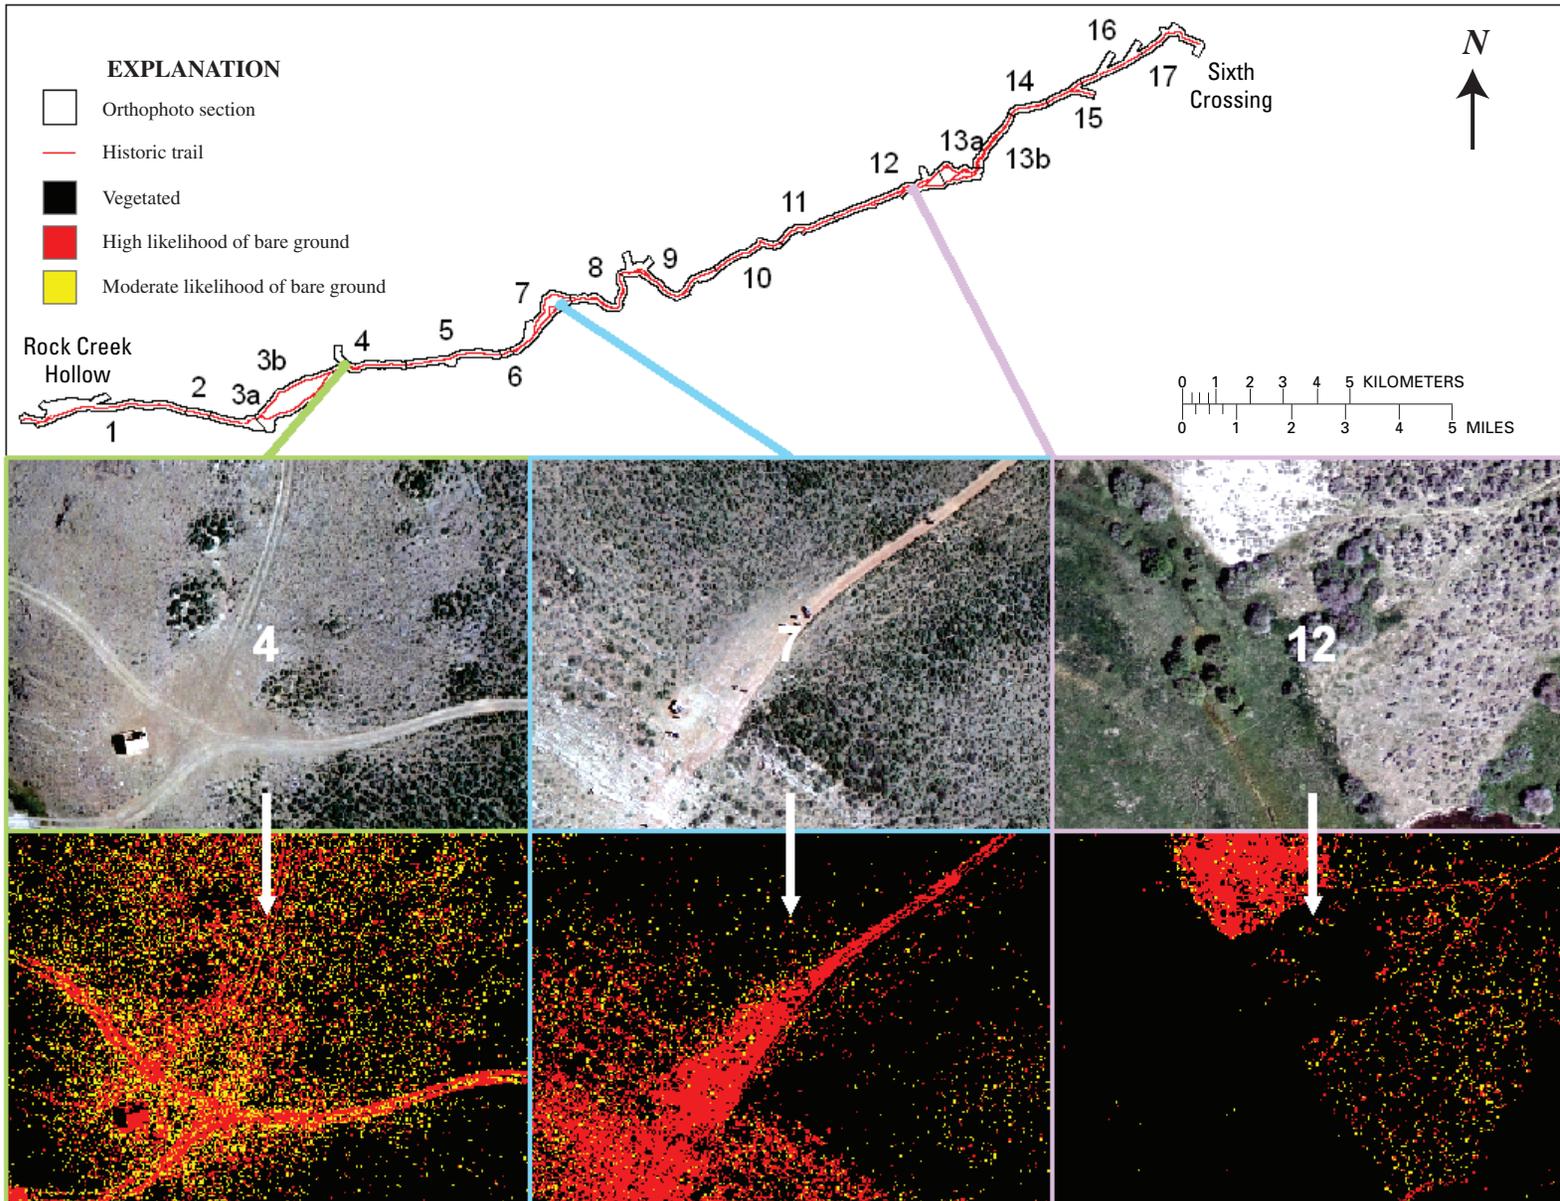


Figure 3. An example of the transition from color aerial photographs (top row) to ERDAS (Earth Resources Data Analysis System) bare-ground class assignments (bottom row). Sample locations (left to right) are: Deep Creek toilet site, Upper Monument, unnamed trail segment. All locations lie between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming. High use areas are numbered 1–17

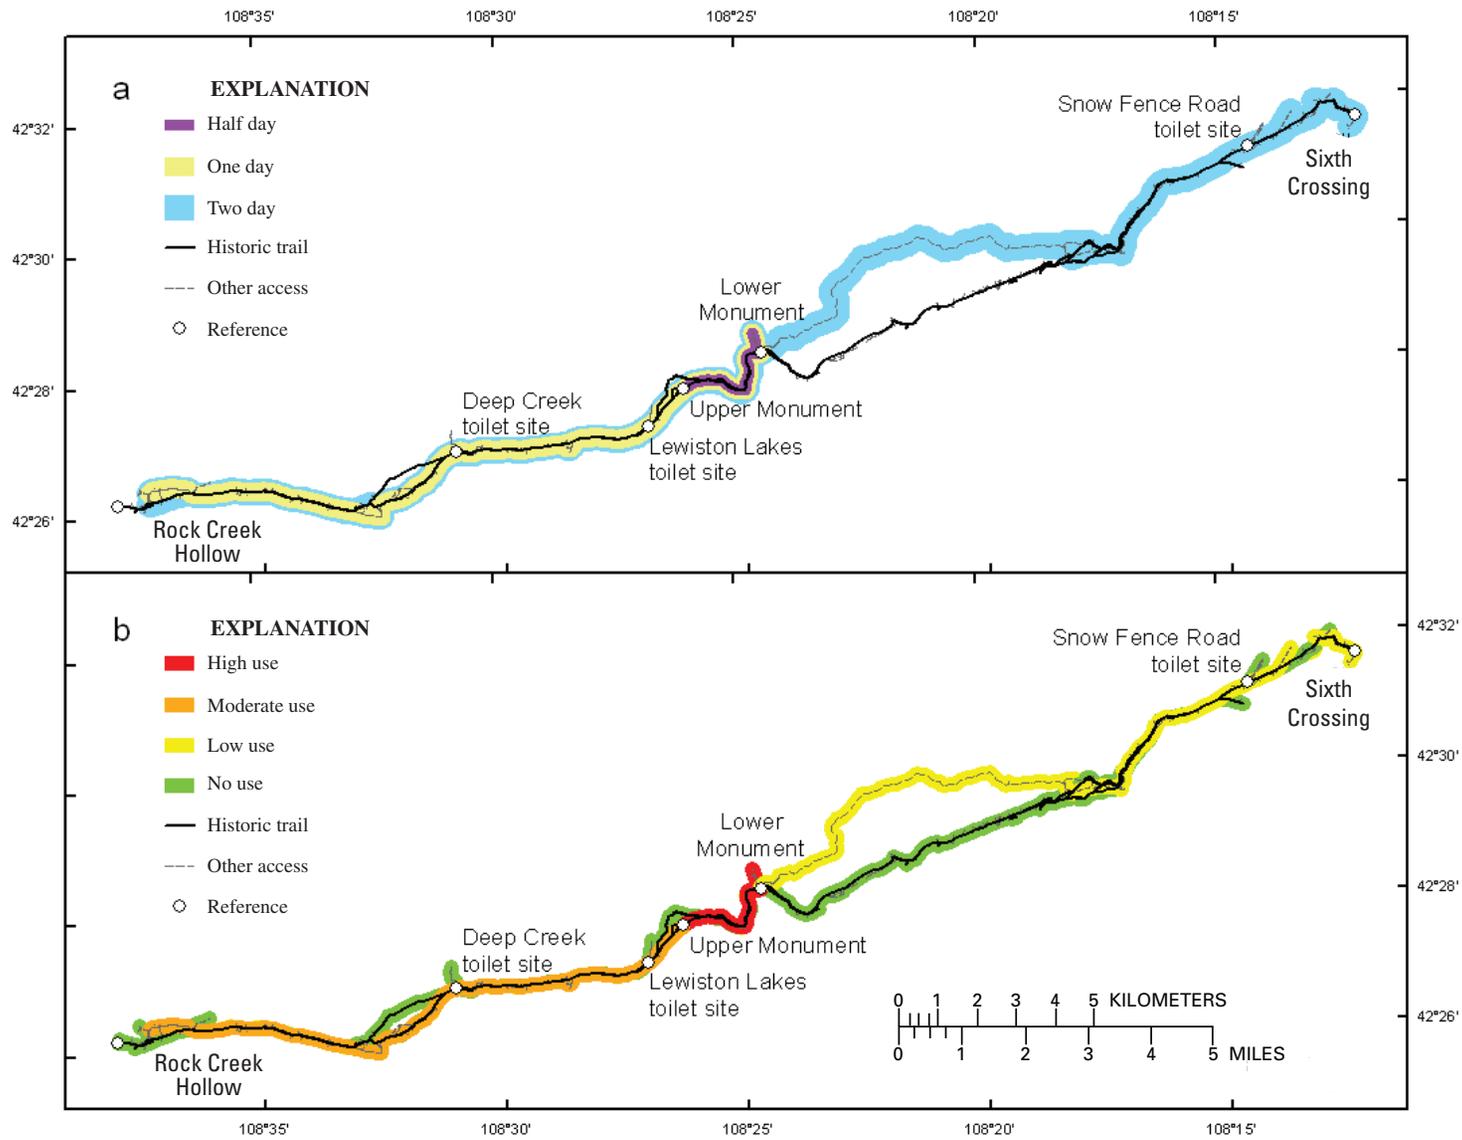


Figure 4. (a) Half-day, one-day, and two-day trekker routes; and four levels of trekker-use intensity (b) along the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming, 2001 to 2006. (Data based on Bureau of Land Management (BLM) estimates and recorded use under the Latter Day Saints (LDS) Farm Management Company (FMC) Special Recreation Permit (SRP) during this time period.)

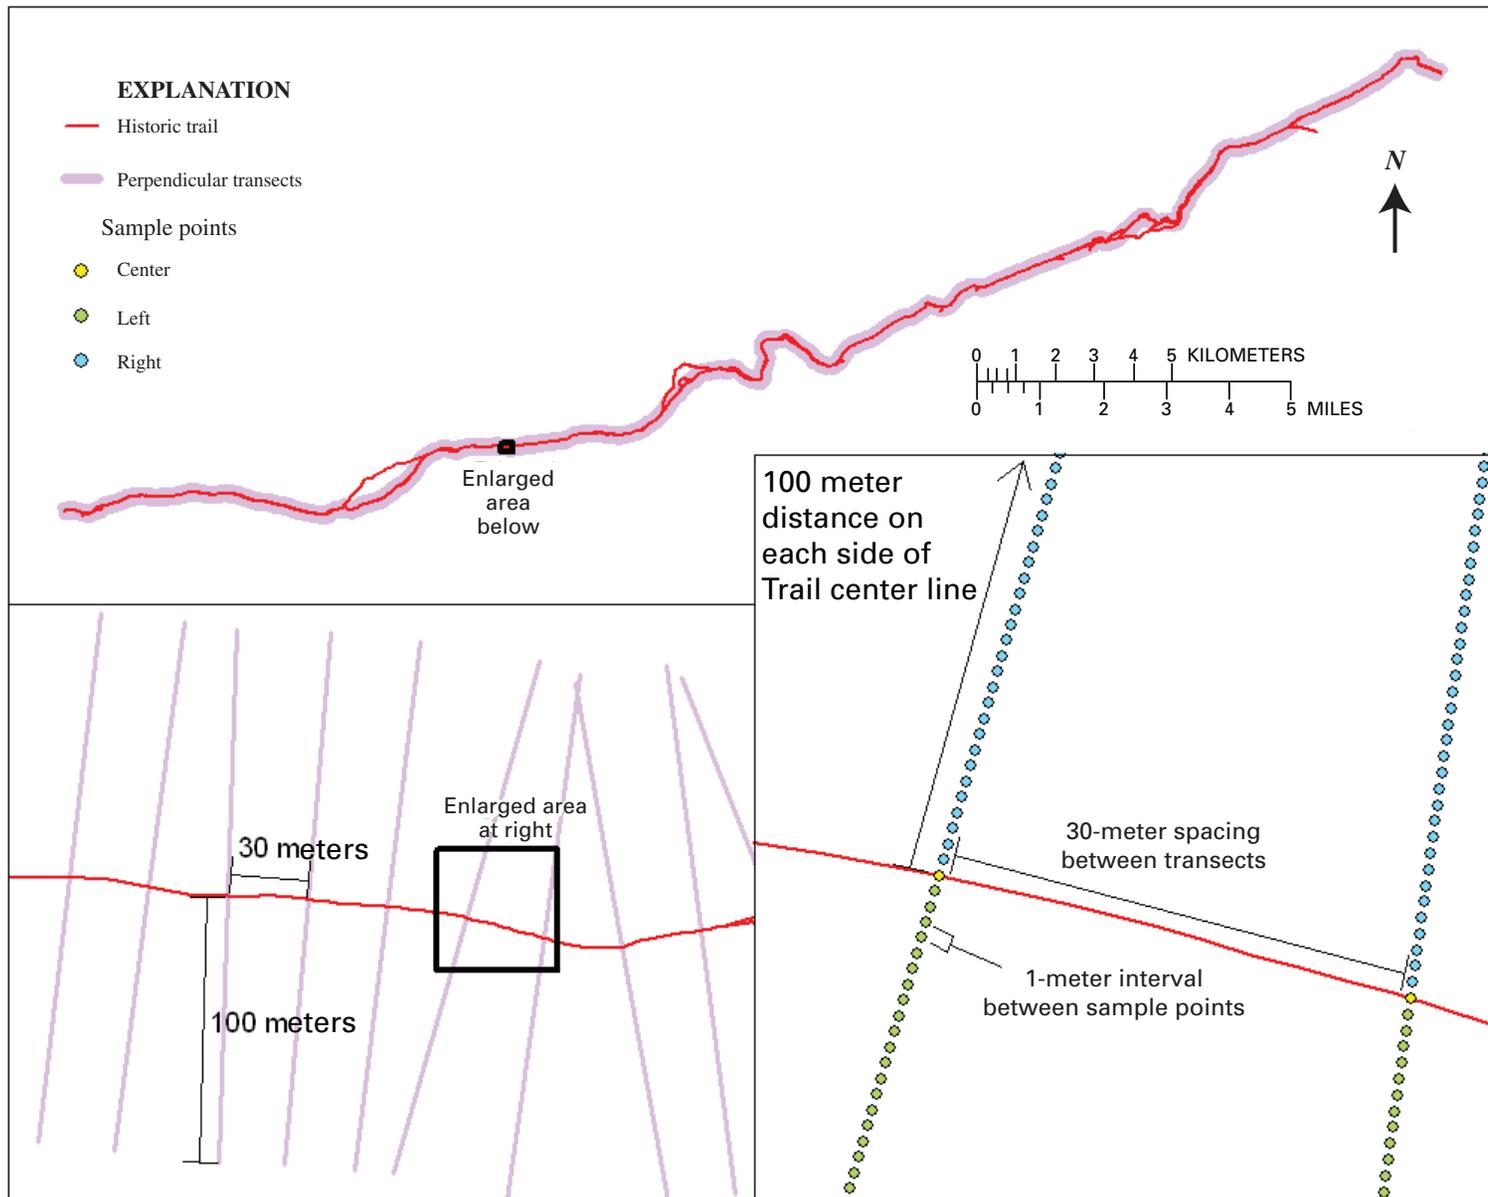


Figure 5. Example of perpendicular transect placement on aerial photographs of the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming.

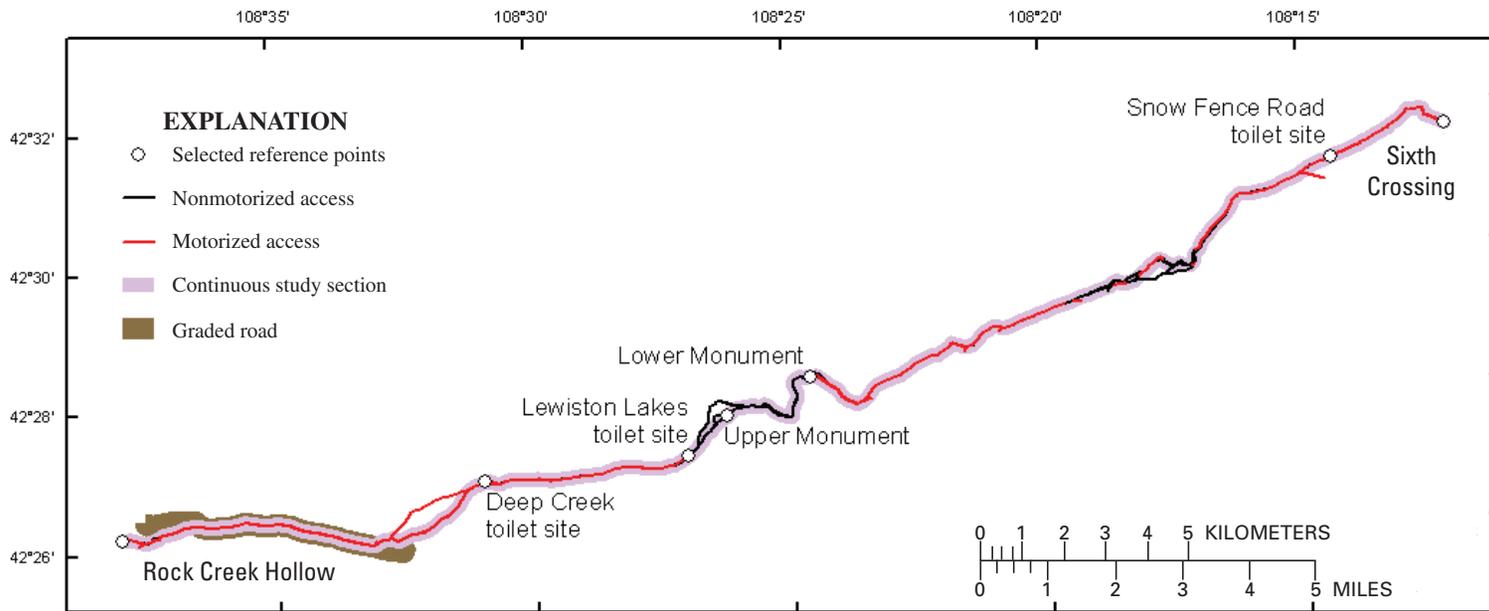


Figure 6. Motorized use on the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming.

from trail center. To account for possible contributing effects of soils, terrain, and the 19 orthophoto sections, multivariate logistic regression was used to describe the probability of bare ground (equivalent to proportion of bare ground over broader areas) being present as a result of handcart use intensity and any significant contributing factors. Final model variables were chosen on the basis of model building approaches suggested by Hosmer and Lemeshow (2000). To reduce model complexity, similar categorical variables were combined for soil type and orthophoto section. Indicator contrasts were identified for reference categorical variables by using either the most common category for ancillary variables or the most logical “control” variable for handcart-use categories (in this instance, no handcart use, but motorized access). The significance of categorical variables was therefore based on differences from the reference category. Finally, variance inflators were used to account for nonindependence of sample plots within transects by “clustering” (grouping) observations for each transect. It was assumed, however, that observations between transects were independent.

To assess whether the amount of bare ground differed between concentrated-use (toilet and rest stops; fig. 7) and randomly available sites, the perimeter of nine designated concentrated-use areas were digitized using aerial imagery in ArcGIS (Environmental Systems Research Institute, 2006). For each of the 9 concentrated-use-site polygons, 30 random polygons were generated ($n = 270$) using a custom Visual Basic for Applications (VBA) ArcObjects script that copied the original polygons (to maintain same shape and size) and moved to point locations (of the same centroid distance from the Trail centerline) that had previously been randomly selected using Hawth’s Analysis Tools (Beyer, 2007) (fig. 8). ArcGIS software was used to measure the percentage of bare ground in each polygon (concentrated use or random) after tallying the number of pixels classified as “high confidence bare” or “other.”

Two methods were used to determine whether the amount of bare ground differed between concentrated-use and random sites. First, 30 random polygons for each concentrated-use site were used to generate 95-percent confidence intervals describing the general incidence of bare ground along the Trail. Individual concentrated-use sites were compared against these intervals, and those having bare-ground values outside the 95-percent confidence interval were considered affected. This analysis allowed each of the nine concentrated-use areas to be assessed individually. In addition, bare ground was averaged for random sites associated with each concentrated-use site and compared against the observed concentrated-use-site values in a one-way t-test, under the null hypothesis that the amount of bare ground at concentrated-use sites was not greater than in random nonaffected plots of same size, shape, and distance from the Trail. All tests and comparisons were made using Stata (StataCorp, 2007) software with an alpha value = 0.05 and report means \pm SD.

Results

Trekker-Use Data

From 2001 to 2006, an average of 11,686 individuals per year reenacted Mormon handcart treks along the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow in Wyoming (table 1), with a maximum number of 16,713 individuals in 2002. Permitted use along the Trail since 2001 varied over time and among sections of the Trail with the lowest permitted use occurring in 2006 (7,235 trekkers) and the highest permitted use (13,113 trekkers) in 2002 (table 1). Recorded casual use also varied by year, with as few as 300 trekkers in 2001 to more than 3,000 casual trekkers in 2002 and 2004 (table 1).

Depiction of Trail and Other Spatial Data

Through examination of the aerial photography in ArcGIS by the BLM Lander Field Office and USGS staff, the mapped accuracy of the Trail between Sixth Crossing and Rock Creek Hollow in at least 76 distinct places was improved. Of the total 65.3 km (40.6 mi) of trail delineated, high confidence of Trail location (spatial accuracy) was assigned to 54.6 km (33.9 mi) of trail, moderate confidence to 4.5 km (2.8 mi) of trail, and low confidence for 6.2 km (3.9 mi) of trail. When summed across the entire study trail segment, there were 38.0 km (23.6 mi) of no-use trail, 6.8 km (4.2 mi) of low-intensity-use trail, 14.8 km (9.2 mi) of medium-use trail, and 3.4 km (2.1 mi) of high-trekker-use trail. There was no statistical difference between the spatial accuracy of the reference NAIP orthophotos and the orthophotos produced for this project (Appendix 2).

After considering the overlap of reenactment routes, three distinct intensities of trekker use were evident (fig. 9). On the east side of the Trail (for example, Sixth Crossing to Sage Creek Campground; fig. 2), trekker use was the lowest with a cumulative level of use from 2001 to 2006 averaging 3,963 ($\pm 1,032$ SD) trekkers per year (fig. 9). In comparison, the west end of the trail (for example, Rocky Ridge to Rock Creek Hollow; fig. 2) received moderate use, averaging 8,304 ($\pm 3,654$) users per year (fig. 9). Finally, where all three trekking routes overlapped at Lower Monument and Rocky Ridge (fig. 2), the cumulative number of trekkers was 12,240 ($\pm 3,520$) per year with a total of 74,400 trekkers using this section from 2001 to 2006 (fig. 9).

Effects of Trekkers on Bare Ground

The following sections describe the results of the analyses of the effects of trekker use on bare-ground areas near and on the Trail. The analyses include trail width, patterns of bare ground, and the effects of off-trail activity on vegetation.

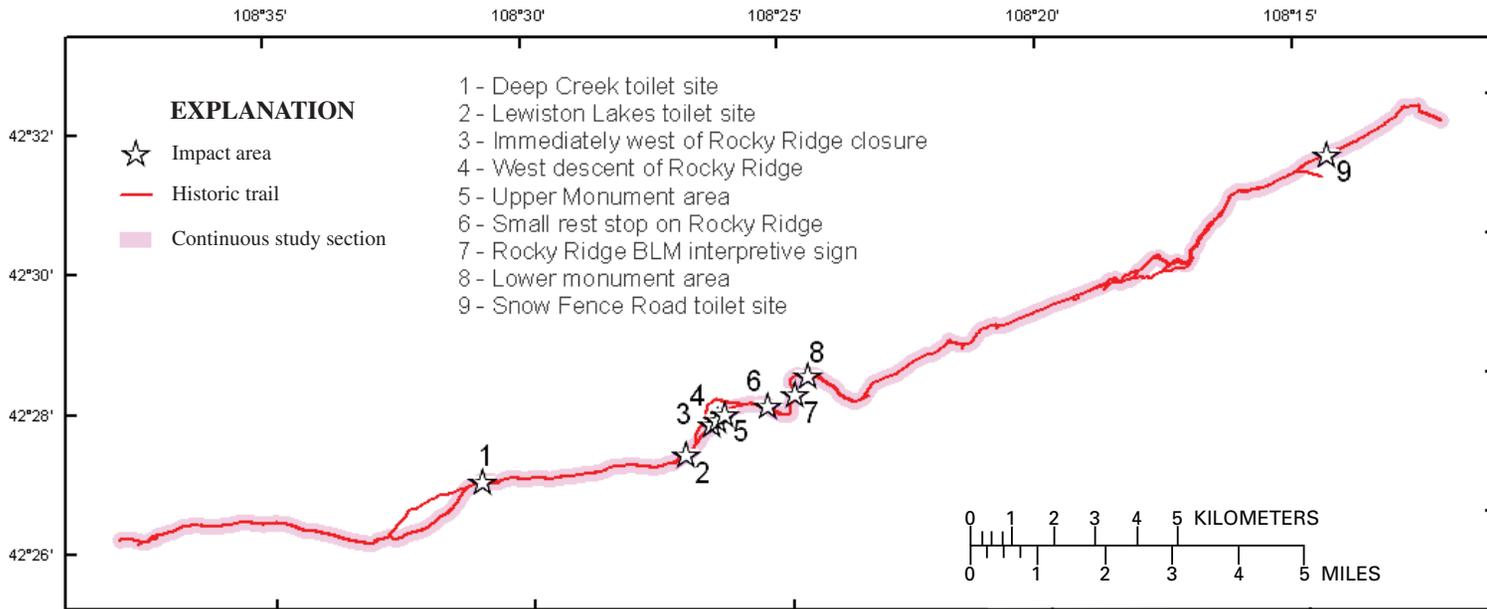


Figure 7. Location of nine concentrated-use areas along the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming.

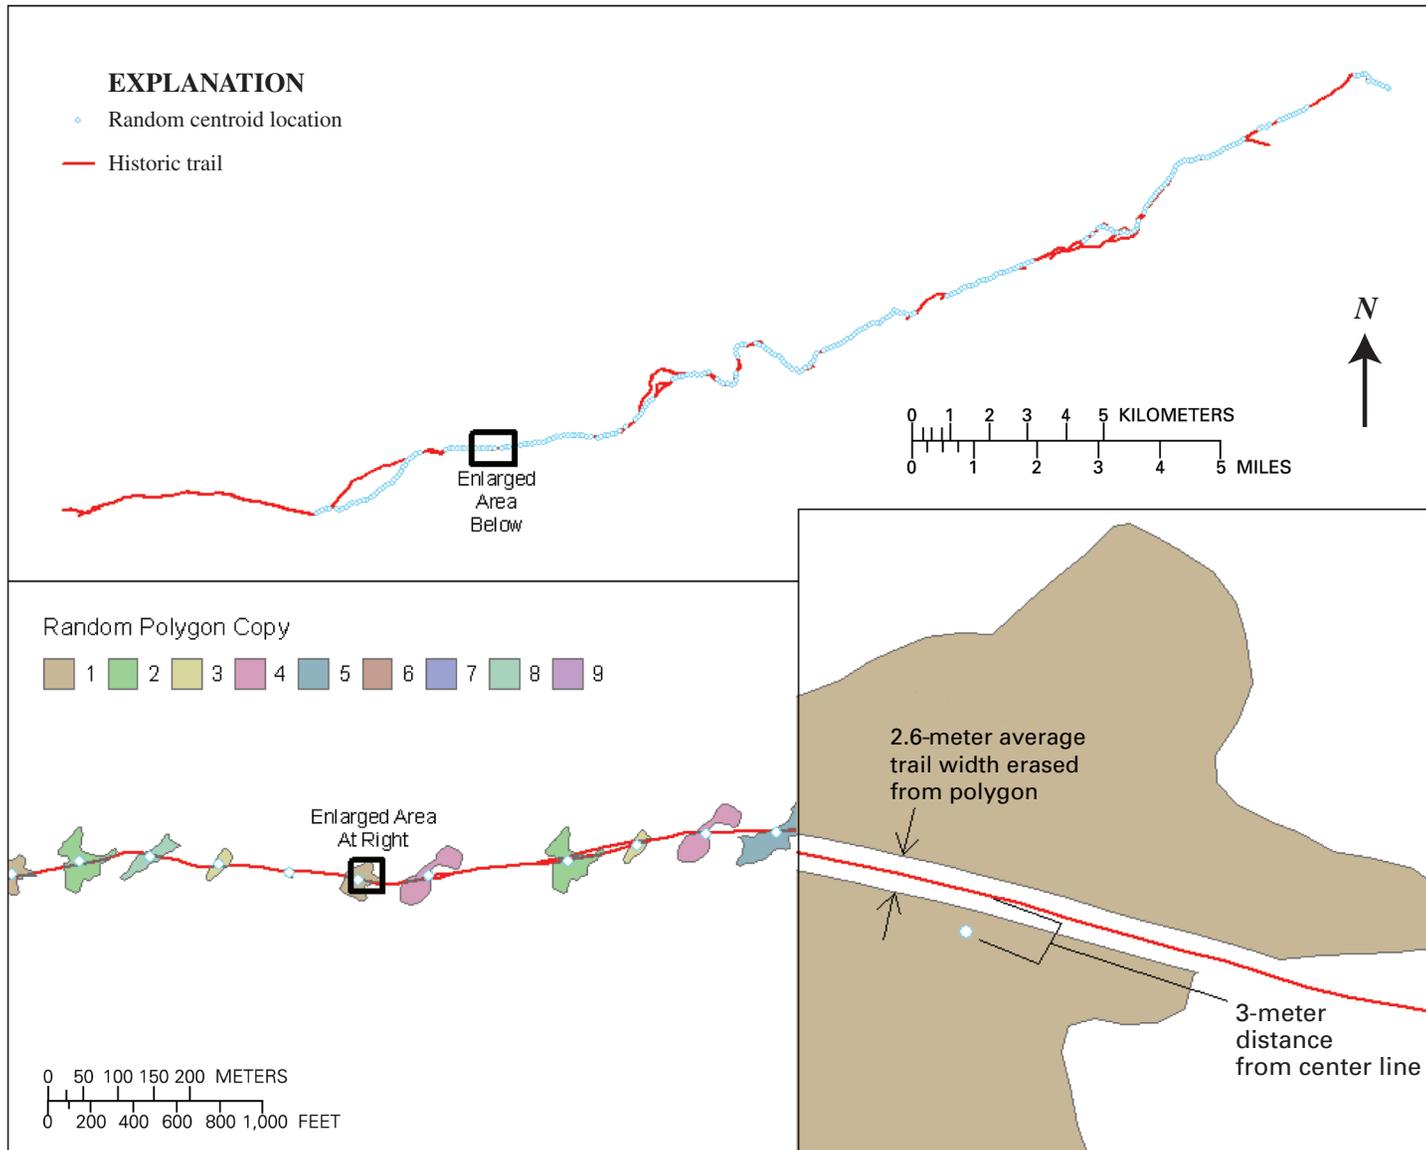


Figure 8. Concentrated-use and random area polygons within which the percentage of bare ground versus vegetated ground were summed. Thirty random polygons (“copies”) were generated for each of the nine concentrated-use areas analyzed (see fig. 7). Random polygons were of same size, shape, and average overall centroid distance (2.6 meters) from trail center as the concentrated-use polygon they were associated with.

14 Aerial-Photographic Assessment of the Mormon Pioneer National Historic Trail, Fremont County, Wyoming

Table 1. Estimated number of handcart users along three distinct reenactment routes. Numbers are based on permitted users recorded from Bureau of Land Management (BLM) Special Recreation Permits (SRP) and casual users recorded by BLM staff from 2001 to 2006.

Route	2001			2002			2003		
	Permitted	Casual	Total	Permitted	Casual	Total	Permitted	Casual	Total
Half Day	1,070	100	1,170	800	400	1,200	30	100	130
Two Day	2,643	100	2,743	5,164	200	5,364	3,905	300	4,205
One Day	4,818	100	4,918	7,149	3,000	10,149	6,330	300	6,630
Total	8,531	300	8,831	13,113	3,600	16,713	10,265	700	10,965

Route	2004			2005			2006		
	Permitted	Casual	Total	Permitted	Casual	Total	Permitted	Casual	Total
Half Day	0	100	100	519	100	619	0	100	100
Two Day	4,228	200	4,428	4,092	200	4,292	2,545	200	2,745
One Day	6,615	3,000	9,615	6,620	200	6,820	4,690	200	4,890
Total	10,843	3,300	14,143	11,231	500	11,731	7,235	500	7,735

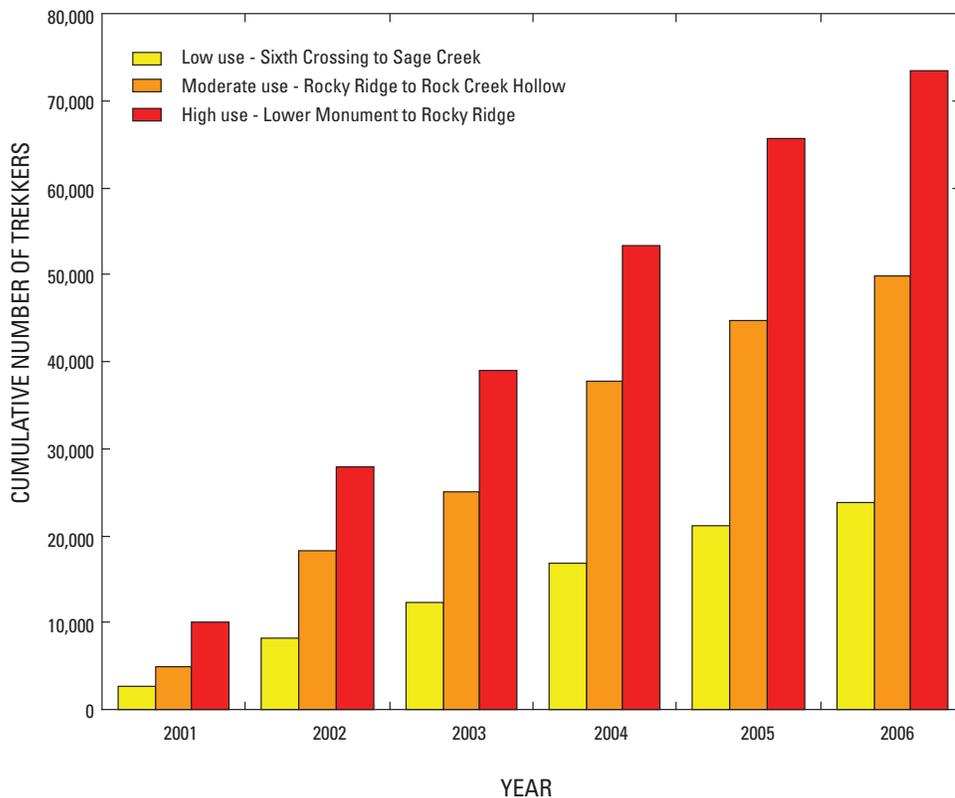


Figure 9. Cumulative number of Mormon trekkers in each of three use levels on the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming, 2001 to 2006.

Patterns in Trail Width by Trekkers

Trail width, as determined by photo imagery and interpretation, averaged 2.5 (± 0.7 SD) meters for segments of the Trail with trekker use or known motorized access and only 0.2 (± 0.6 SD) meter in width for segments of the Trail with no known motorized access or trekker use (fig. 10). For many areas of the Trail where handcart use and public motorized access was limited, little if any evidence of disturbance in vegetation and soils was apparent, indicating ecological recovery from historical disturbances. Among handcart use intensities, as well as control areas where handcart use was absent but where there was motorized access, no significant difference in trail width was evident. Thus, trail width was not used in further analyses.

Patterns of Bare Ground On and Off the Trail by Mormon Handcart-Use Intensity

Using classified bare-ground estimates and GIS-based sampling, measurements of bare ground along active trails show a hump-shaped pattern when plotted against distance from trail center (fig. 11). Bare-ground values range from 57 percent at trail center locations in areas having no handcart use but are open to motor vehicles to 92 percent at 1 m from the trail center in areas having moderate handcart use. Off the trail (≥ 2 m) bare-ground averages ranged from about 12 percent for moderate handcart use to about 20 percent for no handcart use, but with motorized access (table 2, fig. 12).

Generally, trekking activities appear to add an additional 3 to 18 percent bare ground at distances of 0 to 2 m from trail center when compared to areas of the Trail with no handcart use, but with active motorized access (fig. 13). Ground disturbance at the trail center location appeared to be more consistent among handcart-use intensities ranging from an additional 13 percent (low handcart use) to 18 percent (moderate handcart use). At 1-m distances, however, low handcart-use activity had little apparent effect (3 percent more bare ground) when measured against control (no handcart use, motor-vehicle-accessible areas, fig. 13).

More substantial effects were evident for moderate and high handcart-use activities at the 1-m distance class (12 and 17 percent, respectively). Contrary to what might be expected, moderate handcart use had higher amounts of on-trail bare ground than high handcart use, although differences appeared to be rather minor (2 to 5 percent) and may reflect contributing factors associated with landscape characteristics and photo acquisition.

Logistic regression models at the 0- and 1-m distance classes indicate similar patterns of bare ground, regardless of handcart use intensity, after accounting for the contributing effects of soil type and photo imagery section (table 3; see Appendix 6 for detailed descriptions of analyses). Only low handcart use at the 0-m trail center distance and moderate handcart use at the 1-m trail center distance differed substantially from control segments (for example, no handcart use, motorized, table 3). Trail effects from trekking therefore were attenuated once contributing factors were included (Appendix 6; figs. 14 and 15).

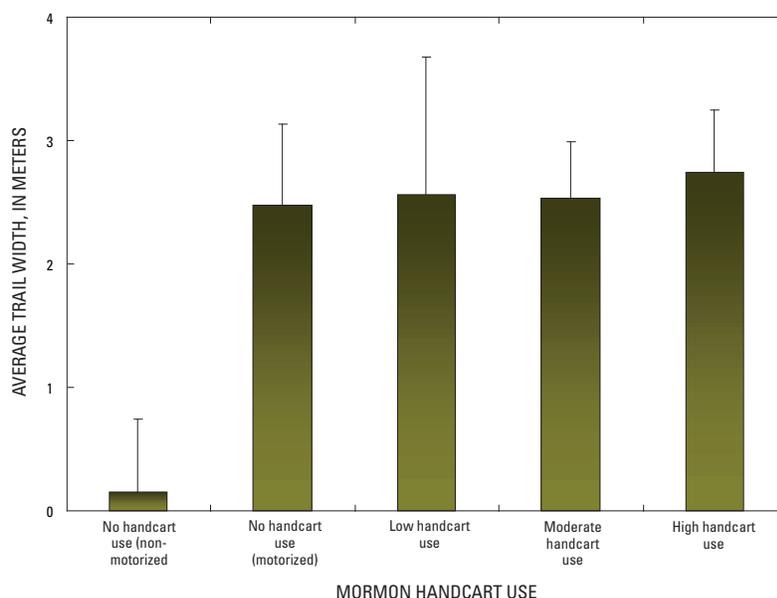


Figure 10. Average trail-width values for five Mormon handcart-use intensity levels on the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming, 2006.

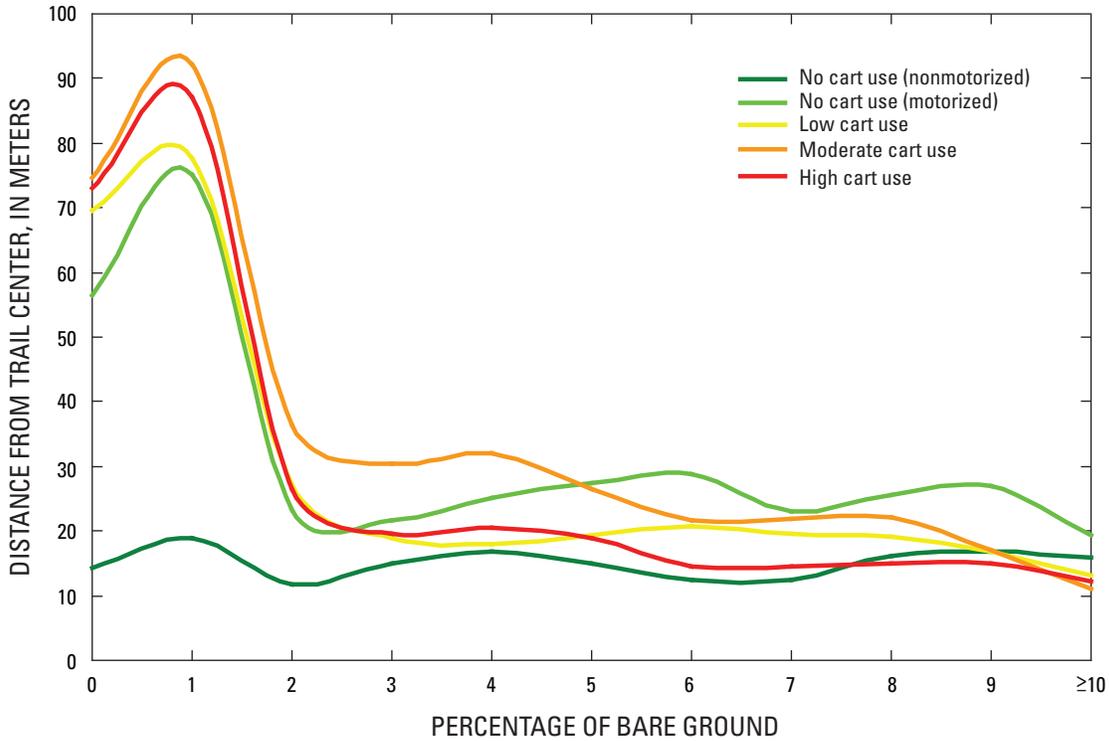


Figure 11. Average percentage of bare ground by category of Mormon handcart use and distance from trail center along the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming.

Table 2. Average percentage of bare ground in five Mormon handcart-use intensity levels and three distance classes from trail center along the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming.

Handcart use category	Distance from trail center		
	0 meters	1 meter	≥2 meters
No handcart use (nonmotorized)	14.3	18.8	15.8
No handcart use (motorized)	56.5	75.1	19.9
Low handcart use	69.6	77.7	13.7
Moderate handcart use	74.6	92.1	12.2
High handcart use	73.0	87.0	12.7

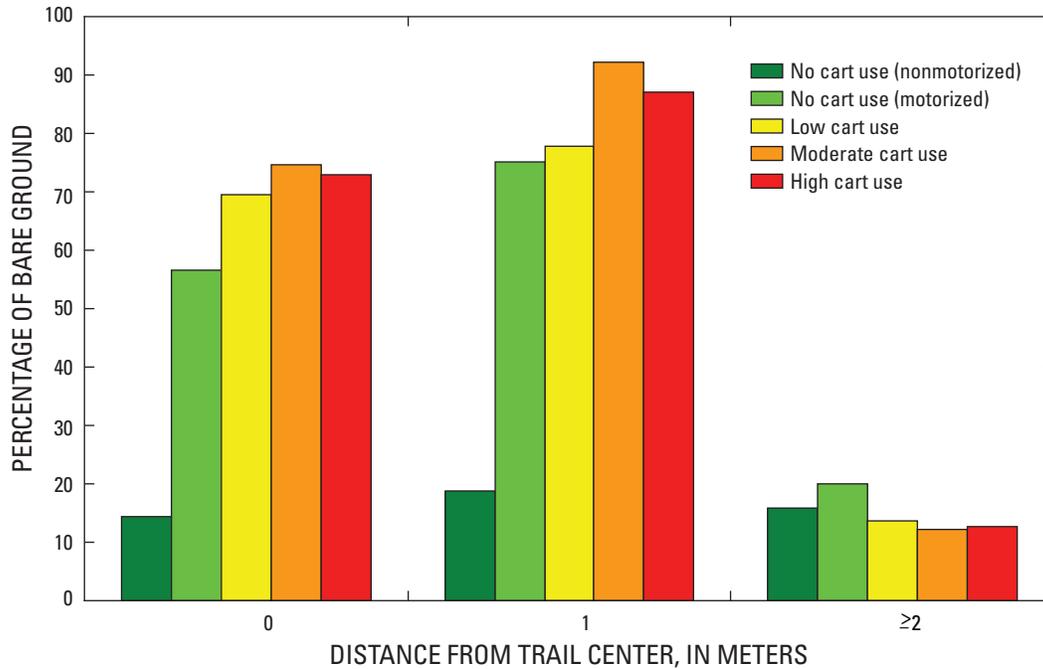


Figure 12. Percentage of bare ground among five Mormon handcart-use intensity levels and three distances from trail center between Sixth Crossing and Rock Creek Hollow, Mormon Pioneer National Historic Trail, Fremont County, Wyoming.

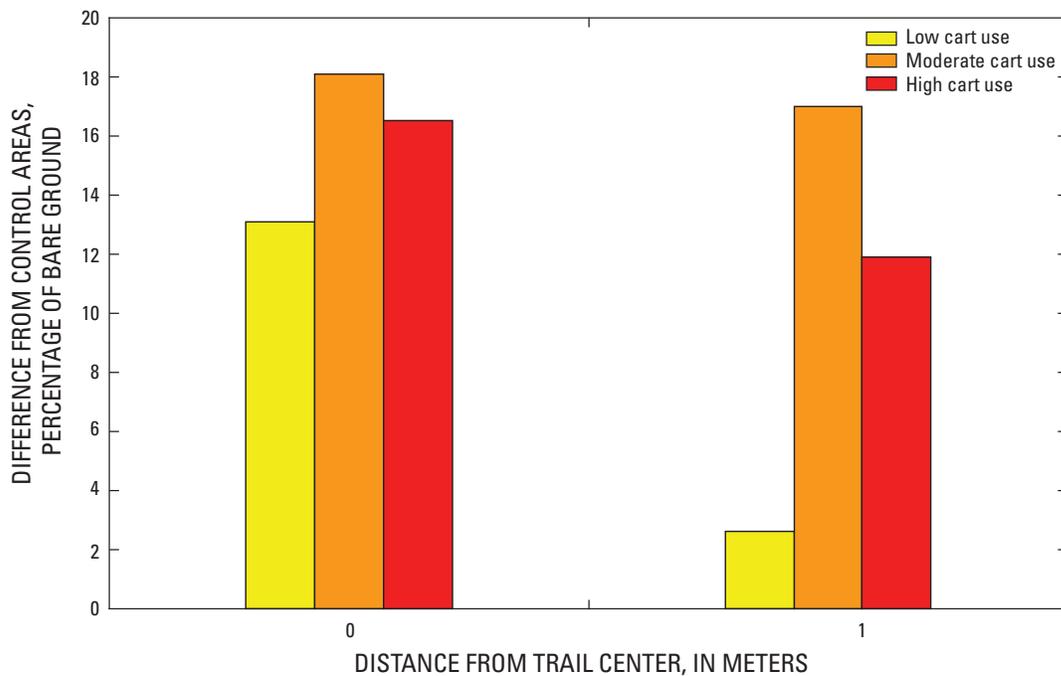


Figure 13. Difference in percentage of bare ground associated with Mormon handcart-use activity by distance from trail center between Sixth Crossing and Rock Creek Hollow, Mormon Pioneer National Historic Trail, Fremont County, Wyoming. Estimates are based on differences between three handcart-use levels and trail-segment control areas, which were assumed to be no-handcart use, but having motorized activity.

Table 3. Logistic regression results describing the probability of being classified bare ground along the Mormon Pioneer National Historic Trail at two on-trail distances from trail center (0 and 1 meter) between Sixth Crossing and Rock Creek Hollow, Mormon Pioneer National Historic Trail, Fremont County, Wyoming.

[β = model coefficient, SE = standard error, p = probability (StataCorp, 2007)]

Variable	0-m (trail center) distance			1-m (trail rut) distance		
	β	SE	p	β	SE	p
Handcart-use category*						
None (nonmotorized)	-1.313	0.415	0.002	-2.095	0.297	0.000
Low cart use	0.416	0.219	0.058	-0.222	0.195	0.254
Moderate cart use	-0.040	0.320	0.901	0.715	0.348	0.040
High cart use	0.124	0.370	0.738	0.240	0.363	0.509
Soil group						
Group 1	0.320	0.324	0.322	1.245	0.381	0.001
Group 2	-0.929	0.381	0.015	-2.070	0.309	0.000
Group 4	0.430	0.339	0.204	-0.125	0.309	0.685
Photo-image group						
Group 2	-1.667	0.514	0.001	-1.536	0.366	0.000
Group 3	-0.316	0.263	0.229	-0.609	0.234	0.009
Group 4	0.169	0.235	0.473	-0.134	0.222	0.544
Group 5	0.772	0.261	0.003	0.216	0.367	0.557
Constant	0.379	0.216	0.079	1.658	0.220	0.000

*Reference used for indicator contrasts of categorical variables: none, motorized for handcart-use category; group 3 for soils, and group 1 for photo image.

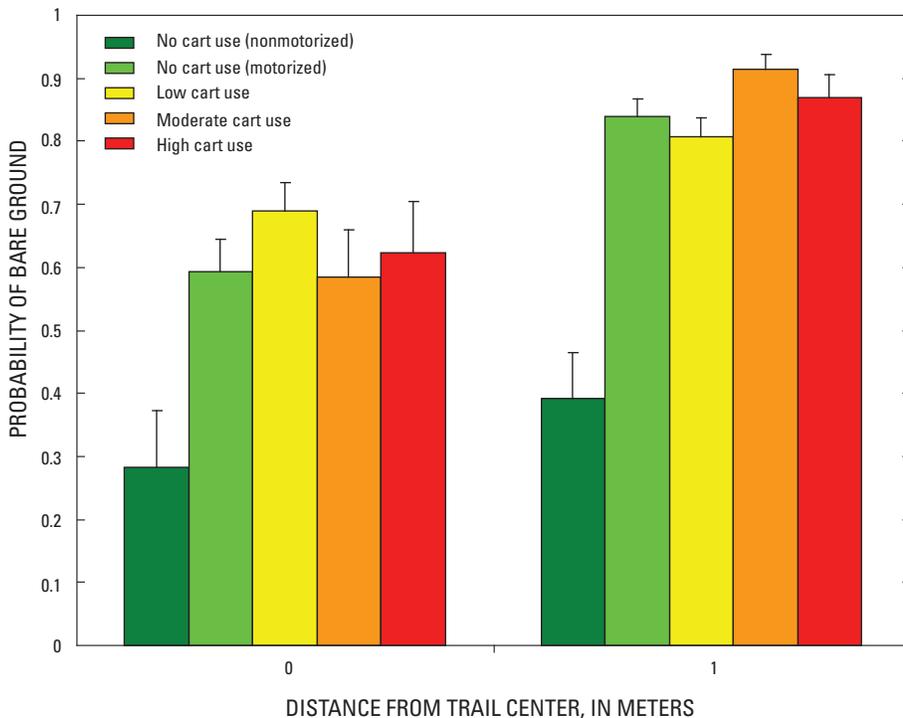


Figure 14. Predicted probability of bare ground plus the standard error (SE) based on handcart use level and distance from trail center, adjusted for soil and photo image effects between Sixth Crossing and Rock Creek Hollow, Mormon Pioneer National Historic Trail, Fremont County, Wyoming (for figure, photo image group 1 and soil group 3 were the reference categories).

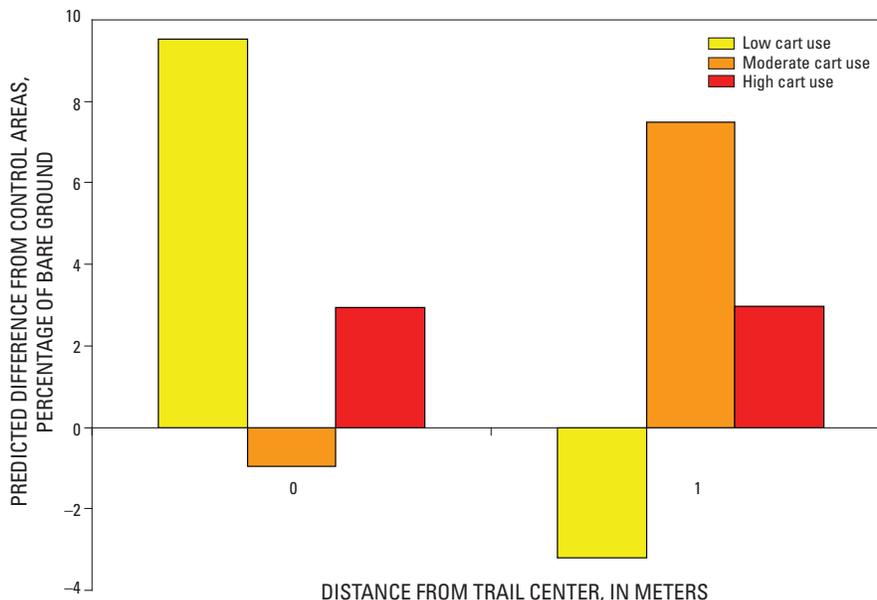


Figure 15. Predicted differences in percentage of bare ground between control and handcart-use sites at trail center and 1 meter distance from trail center, after accounting for soil and photo image variation between Sixth Crossing and Rock Creek Hollow, Mormon Pioneer National Historic Trail, Fremont County, Wyoming.

Patterns of Bare Ground by Concentrated-Use Areas

Three of the 12 concentrated-use areas identified by BLM Lander Field Office staff are off of the true Historic Trail alignment. Therefore, the nine concentrated-use areas on the alignment were analyzed. The nine sites range in size from 45.7 to 7,237 m² ($\bar{x} = 2,353.8 \pm 2,205.1$), and the amount of bare ground present at the sites ranged from 13.9 percent at the Rocky Ridge BLM interpretive sign to 82.4 percent at the vehicle parking lot located at the western base of Rocky Ridge (Appendix 6). Average amount of bare ground at control (random) sites averages 20.7 percent and ranges from 17.9 to 25.4 percent. Seven of nine concentrated use sites had significantly higher ($p < 0.05$) levels of bare ground than control sites (fig. 16). Only sites 6 (Rocky Ridge BLM interpretive sign) and 7 (Rocky Ridge rest stop) did not differ from average bare-ground levels elsewhere along the Trail. Overall, concentrated-use sites ($\bar{x} = 45.0$ percent ± 23.6 percent) have significantly higher percentage of bare ground than random sites ($\bar{x} = 20.7 \pm 15.7$; one-tailed $t = -3.192$, $p = 0.006$, Appendix 6, p. 92).

Discussion

Handcart trekking had no measurable effect on trail widening and relatively minor on-trail effects to vegetation

compared to other sources of impact (for example, motorized traffic). The amount of bare ground was explained by soil and photo-imagery variation rather than trekker intensities. Trail width and on-trail vegetation appeared to be influenced by past and current motorized traffic. Trail segments receiving motorized use, but no-handcart use, were substantially wider than trail segments where neither activity occurred. Because most of the area where handcart trekking occurred was open to motor vehicles and no evidence of further trail widening was observed, trekking appears to have no additional effects over motor-vehicle impacts on the Trail itself.

A similar result was obtained when considering on-trail bare-ground patterns. Trail segments receiving motorized-traffic use but not handcart use had nearly four times the level of bare ground than areas where neither activity occurred. Although the effects of handcart trekking were relatively minor overall, trekking effects did appear to be additive with motorized impacts. Bare ground in areas where handcart trekking and motor-vehicle use coincided averaged 8.5 percent (for 24 soil and photo-type categories) higher at 1-m trail-center distances than in areas where only motor vehicle activity occurred. Because it was not possible to evaluate trail width or percentage of on-trail bare ground in areas where handcart use occurred in the long-term absence of motor vehicle traffic, the level of trekking effects on otherwise undisturbed trail segments cannot be determined.

Previous research indicates that even a few motor vehicles can reduce live vegetation (Ouren and others, 2007) by

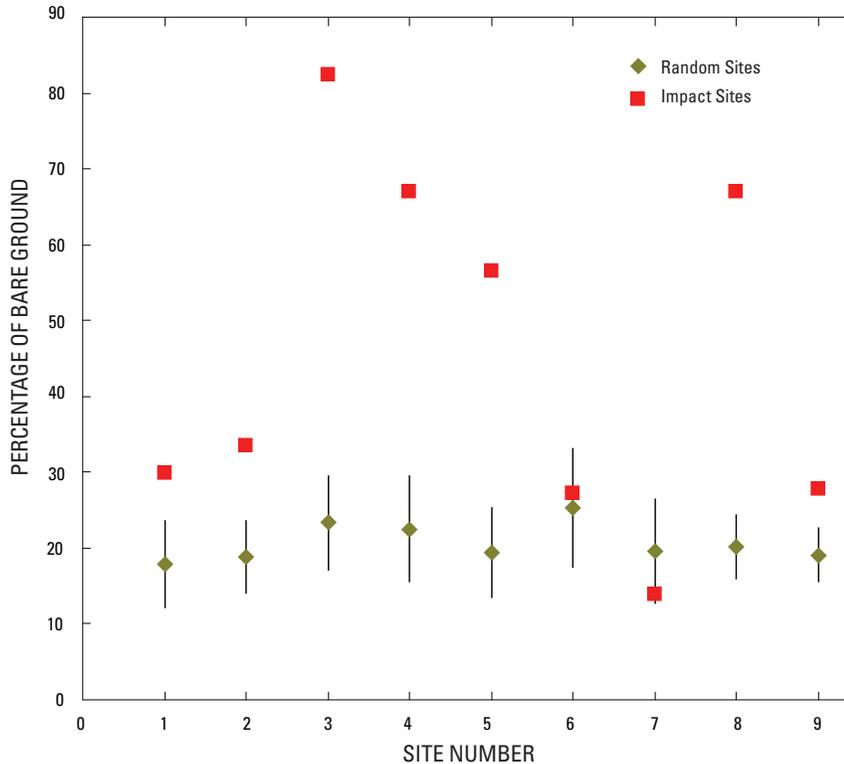


Figure 16. Percentage of bare ground present at concentrated-use and random sites along the Mormon Pioneer National Historic Trail between Sixth Crossing and Rock Creek Hollow, Fremont County, Wyoming. Bars are 95-percent confidence intervals around average bare ground estimates in random plots. $n = 30$ random plots per concentrated use site; 1 = Deep Creek toilet; 2 = Lewiston Lakes toilet; 3 = parking lot at vehicle closure gate, west side of Rocky Ridge; 4 = west descent of Rocky Ridge; 5 = Upper Monument; 6 = small rest stop, top of Rocky Ridge; 7 = Rocky Ridge BLM interpretive sign; 8 = Lower Monument; 9 = Snow Fence Road toilet).

damaging plants (Adams and others, 1982; Webb, 1983) or by reducing water availability due to soil compaction (Adams and others, 1982). These effects are exacerbated with increased motorized use (Kutiel and others, 2000). Additional effects associated with motorized traffic can include soil erosion, altered microclimates, introduction of exotic plant species, nutrient (primarily nitrogen) enrichment, increased pollution, and increased fire frequency (Lovich and Bainbridge, 1999; Jordan, 2000). Although these specific effects were not addressed in this study, unmeasured cumulative effects due to motorized vehicle use appear to affect revegetation of the trail and reduced the ability to detect effects from handcart reenactments.

Rapid decreases in bare ground at locations greater than 1 m from the trail center are consistent with analyses of trail width, which averaged 2.6 m (1.3 m to either side of trail centerline) along active trail segments. Handcart trekking caused no additional loss of vegetation on off-trail locations (≥ 2 m from the trail center) away from concentrated-use sites (for

example, rest and toilet sites). These results are consistent with previous research showing a limited zone (1 to 2 m) of influence (Dale and Weaver, 1974; Bjorkman, 1996).

Seven of nine mapped, off-trail, concentrated-use sites contained substantially higher amounts of bare ground than control (random) areas. Concentrated-use sites averaged 45 percent bare ground, more than double the 20 percent bare ground typical of other areas along the Trail. Pit toilets and rest sites are focal points for intense, repetitive trampling from hikers, handcarts, and support vehicles and are particularly susceptible to soil compaction, erosion, and increased invasion of exotic and noxious plants. Careful observation of these sites might be required to prevent irreversible disturbances or the invasion of noxious or invasive exotic plants. Where necessary, management actions, including control of noxious or invasive exotic plants and native revegetation, may be necessary to ensure long-term health of these areas of the Trail.

Study Limitations

Several factors that were not accounted for in the analytical design of this study were included as model covariates to control for contributing effects, although it would have been more desirable to implement control of these factors during the study design. Aerial photograph subsection relating to image color balance and soil type were substantially related to observed patterns of bare ground. Although exhaustive efforts were made to color balance the photo images, photo variation in brightness and color likely had an adverse effect on the ability to classify and, therefore, to model bare ground, resulting in reduced statistical power. The drought conditions that occurred in early 2006 further hampered the ability to compare effects of trail use because much of the vegetation was water stressed, which limited green vegetation during the June photography overflight. Thus, bare-ground estimates in the study for June 2006 may be overestimated when compared to average growing-season conditions.

Despite detailed information on trekker use, no quantitative data were available on vehicular traffic volume (past or present) restricting the ability to detect differences in bare ground because of trekker use. It is apparent that past and present motor vehicle use has affected trail conditions, and inferences drawn from on-trail effects need to be considered in this light.

Finally, use of aerial photography did not allow consideration of how vegetation type influenced patterns of bare ground and effects because of trekkers. Several studies have demonstrated relations between recreational trail use, reductions in native plant species, and increased exotic or noxious plants. For example, it is well established that exotic plant-species richness is higher along roads and trails (Dale and Weaver, 1974; Tyser and Worley, 1992) and in areas disturbed by off-highway vehicles (Davidson and Fox, 1974) than in other areas.

Management Considerations

The models presented here indicate that other factors affect vegetative condition along the Trail besides handcart trekking. Circumstantial evidence indicates that motor vehicles have contributed the most to vegetative effects on the Trail.

Handcart trekking had negligible effects on the Trail with differences among trekker-use intensities largely indiscernible. More in-depth relations between trekker visitor-use intensities and vegetative cover along the Trail could be assessed quantitatively but would require further carefully designed data collection for a period of years.

Marginal differences in vegetative cover were apparent among low-use Trail sections when compared with either moderate or high-use sections. However, yearly variation in visitor use and unquantified factors such as motor vehicle volume inhibited our ability to fully assess relations between handcart-trekking intensity and vegetation loss on the Trail.

Estimating the interactive effects of both motor vehicles and handcart trekking on vegetative condition along the Trail is possible but would require data collection coordinated with management of vehicle and trekker use.

Concentrated-use sites such as rest and toilet stops had substantial vegetative loss. Areas where sensitive vegetation (woody-stemmed shrubs, forbs, and so forth), soils, or other features of interest occur need to be identified and managed to preclude future placement of camp, rest, and toilet sites.

Soil type and vegetative-cover composition are correlated. Therefore, vegetative sensitivity to trekker use likely varies among soil types. Detailed assessment of the effects of trekker-use intensities on vegetation and soils is possible but will require further study.

Establishment of permanent monitoring plots for each trail segment would allow long-term monitoring of the status and trends of bare ground and invasive exotic-plant species. Using adaptive management with explicit goals or targets, such plots could be used to determine whether management actions or mitigation practices (revegetation/seeding, control of invasive species, and so forth) are necessary for the long-term sustainability of the Historic Trail.

Summary

Vegetative condition on and near the Trail can influence the scenic quality of the Trail. The amount of devegetated bare ground present also may influence the quality of visitors' heritage or historical experience while on the Trail. All areas of the Trail on which recent recreational use was permitted were wider than unused trail segments, but there is no evidence that handcart trekking affected trail width. Handcart trekking affected on-trail vegetative cover to a minor degree, with moderate and high trekker-use areas affected slightly more than low-use areas.

Although trail segments having handcart activity contained less vegetation than control areas without trekker activity, effects caused by handcart trekking appeared to be less severe than effects caused by motor vehicle traffic. The contributing effects of motor vehicle use on trail condition restricted our ability to detect effects of handcart trekking on vegetative condition. Concentrated-use areas such as toilet and rest sites also had reduced vegetative cover relative to unused areas. Sections of the Trail where no recreational use had occurred for a period of years demonstrated a gradual vegetative recovery, and this phenomenon needs to be evaluated in light of the desired management condition of this Trail section. Gaining a better understanding of the relations between Mormon handcart trekking and vegetative conditions along the Trail will require studies involving, at a minimum, manipulations of trekker and motor vehicle use levels and, ideally, establishment of long-term monitoring plots to evaluate onsite conditions and trends in bare ground, and other important measures such as invasive exotic plants.

Acknowledgments

We thank Craig Bromley, Karina Bryan, Jared Oakleaf, and Sydney Schopke of the BLM Lander Field Office for technical and logistical support and for sharing their onsite knowledge of the study area with us. Ken Henke, Don Simpson, and Andrew Tenny of the BLM Wyoming State office provided financial support for this study and helped with study conceptualization. Primary funding was provided by the U.S. Geological Survey Central Region Interdisciplinary Science Partnerships (CRISP). Additional technical assistance was provided by the Fort Collins Science Center GIS and Remote Sensing Team personnel. Kay Dudek and Collin Talbert of the Arctic Slope Regional Corporation Management Services at the Fort Collins Science Center also assisted with the orthorectification process, and Tim Assal assisted with developing the initial spatial sampling design.

References Cited

- Adams, J.A., Endo, A.S., Stolzy, L.H., Rowlands, P.G., and Johnson, H.B., 1982, Controlled experiments on soil compaction produced by off-road vehicles in the Mojave Desert, California: *Journal of Applied Ecology*, v. 19, p. 167–175.
- Beyer, H.L., 2007, Hawth's analysis tools for ArcGIS: <http://www.spatalecolology.com/htools>.
- Bjorkman, A., 1996, Off road bicycle and hiking trail user interactions—A report to the Wisconsin Natural Resources Board: Eagle, Wisconsin Department of Natural Resources Bureau of Research Report, 124 p.
- Bureau of Land Management, 2004, Environmental assessment for the proposed special recreation permit to conduct handcart treks on Bureau of Land Management administered public lands between Sixth Crossing and Rock Creek Hollow: Lander, Wyo., BLM Lander Field Office report, 90 p.
- Bureau of Land Management, 2005, Finding of no significant impact and decision of record for the proposed special recreation permit to conduct handcart treks on Bureau of Land Management administered public lands between Sixth Crossing and Rock Creek Hollow: Lander, Wyo., BLM Lander Field Office report, 26 p.
- Dale, D., and Weaver, T., 1974, Trampling effects on vegetation of the trail corridors of north Rocky Mountain forests: *Journal of Applied Ecology*, v. 11, p. 767–772.
- Davidson, E.D., and Fox, M., 1974, Effects of off-road motorcycle activity on Mojave Desert vegetation and soil: *Madroño*, v. 22, p. 381–390.
- Environmental Systems Research Institute, 2006, ArcGIS Release 9.2 [software]: Redlands, Calif., Environmental Systems Research Institute, 1999–2007.
- ERDAS Imagine, 2006, ERDAS Imagine Professional, Version 9.1: Norcross, Ga., Leica Geosystems, Inc.
- Haines, A.L., 1981, Historic sites along the Oregon Trail: Gerald, Mo., Patrice Press, 439 p.
- Hosmer, D.W., and Lemeshow, S., 2000, Applied logistic regression, 2d ed.: New York, John Wiley & Sons, 373 p.
- Image Processing Software, Inc., 2007, OrthoMapper—Softcopy Photogrammetric Software for the GIS, Natural Resources and Engineering Professionals: Madison, Wis., Image Processing Software, Inc., 152 p.
- Jordan, J., 2000, Ecological impacts of recreational use of trails—A literature review: Cold Spring Harbor, N.Y., The Nature Conservancy, <http://conserveonline.org/docs/2000/11/Trails.doc>, accessed November 7, 2007.
- Kutieli, P., Eden, E., and Zhevelev, Y., 2000, Effect of experimental trampling and off-road motorcycle traffic on soil and vegetation of stabilized coastal dunes, Israel: *Environmental Conservation*, v. 27, p. 14–23.
- Love, J.D., and Christiansen, A.C., 1985, Geologic map of Wyoming: U.S. Geological Survey Special Geologic Map, scale 1:500,000.
- Lovich, J.E., and Bainbridge, D., 1999, Anthropogenic degradation of the southern California desert ecosystem and prospects for natural recovery and restoration: *Environmental Management*, v. 24, p. 309–326.
- National Park Service, 1999, Comprehensive Management and Use Plan and Final Environmental Impact Statement for the California National Historic Trail and Pony Express National Historic Trail; and the Management and Use Plan Update and Final Environmental Impact Statement for the Oregon National Historic Trail and the Mormon Pioneer National Historic Trail: Lakewood, Colo., National Park Service, 371 p.
- National Park Service, 2007, Mormon Pioneer National Historic Trail—History and culture: Interpretive Site Bulletin, Salt Lake City, Utah, 2 p.
- Ouren, D.S., Haas, Christopher, Melcher, C.P., Stewart, S.C., Ponds, P.D., Sexton, N.R., Burris, Lucy, Fancher, Tammy, and Bowen, Z.H., 2007, Environmental effects of off-highway vehicles on Bureau of Land Management lands—A literature synthesis, annotated bibliographies, extensive bibliographies, and Internet resources: U.S. Geological Survey Open-File Report 2007–1353, 225 p.

Roberts, S., 1989, Wyoming geomaps: Laramie, Wyo., Geological Survey of Wyoming, 42 p.

StataCorp, 2007, Release 10: College Station, Texas.

Tyser, R.W., and Worley, C.A., 1992, Alien flora in grasslands adjacent to road and trail corridors in Glacier National Park, Montana (U.S.A.): *Conservation Biology*, v. 6, p. 253–262.

Webb, R.H., 1983, Compaction of desert soils by off-road vehicles, *in* Webb, R.H., and Wilshire, H.G., eds., *Environmental effects of off-road vehicles—Impacts and management in arid regions*: New York, Springer-Verlag, p. 50–79.

Appendixes

Appendix 1. Aerial Photograph Acquisition and Ground-Control GPS Details

Number of flight path segments: 20


Approximate aerial coverage of each photographic frame: 900 m x 900 m.

Overflight elevation for photography: 610 m above ground surface.

Camera, lens, aperture information are reported in Appendix 2.

Photograph scale and resolution: 1:3,960 and a spatial resolution of 60.1 mm. At this scale, National Mapping Accuracy Standards require error of about 1/50th of an inch, or in this case 2.0 m.

Original color positives were scanned and converted into digital format by the contractor at an image resolution of 1,814 dots per inch (DPI).

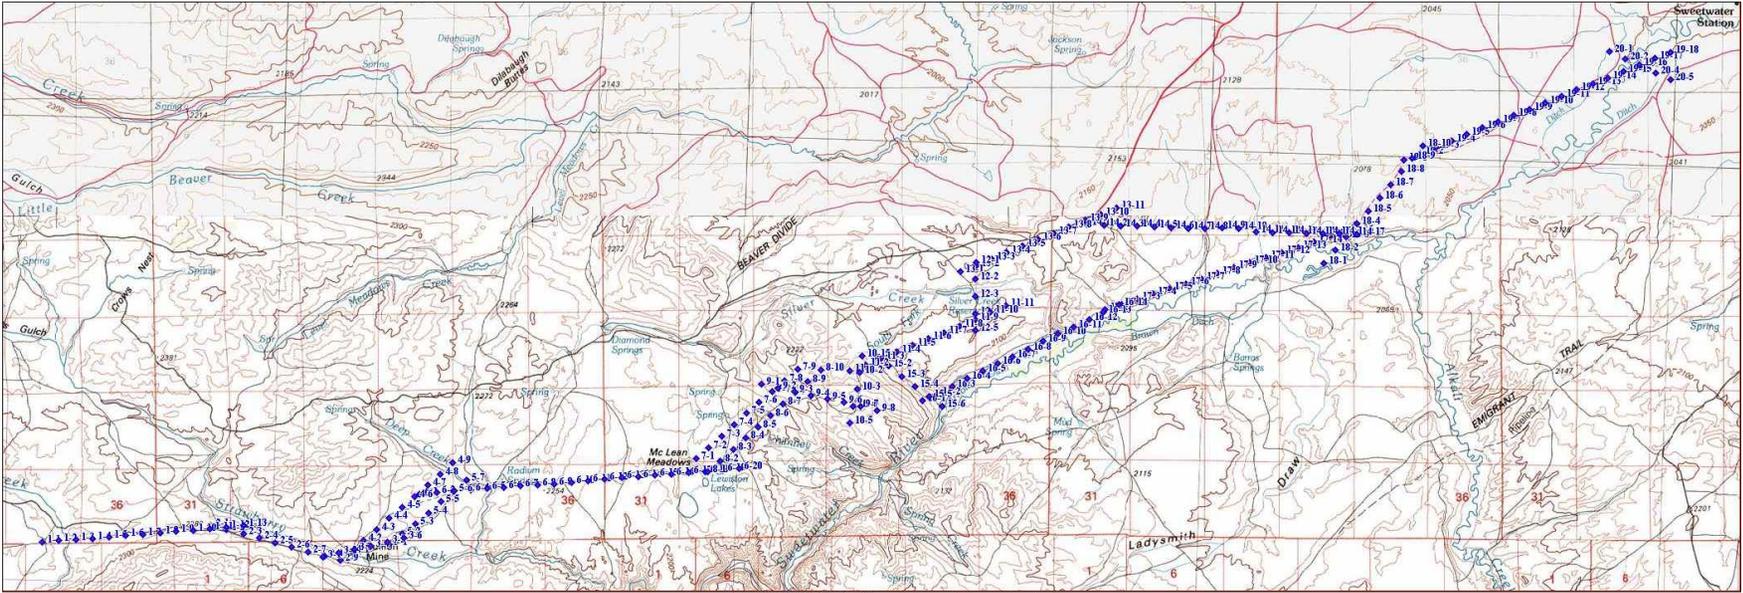

Map created with TOPO!® ©2003 National Geographic (www.nationalgeographic.com/topo)

Map of Aerial Photography Flight Lines and Photo Numbers

Ground-Control Point and OPUS Solution Information

Ground-control targets were distributed evenly along the flightlines to facilitate tying points in the aerial photos to real-world coordinates and assess accuracy of the orthorectified photos. To accurately record the position of the ground-control targets, a real-time kinematic (RTK) global positioning system (GPS) was used. The GPS system used in this survey consisted of a stationary base station and a roving receiver. The reference frame chosen for this survey was the World Geodetic System 1984 (WGS84), and coordinates were recorded as geographic latitude and longitude.

A Leica GRX1200 Pro[®] receiver was used as a base station at eight sites along the Trail. The base station receiver was stationary and recorded satellite information at a 30-second sampling rate, which was later processed to calculate a more accurate base station position. A Pacific Crest Positioning Data Link PDL[®] radio transmitter was attached to the base station that broadcasts real-time GPS signal corrections to the roving GPS receiver. The logged GRX1200 base station data were converted to a standard Receiver Independent Exchange format (RINEX) and submitted to the National Geodetic Survey’s Online Positioning User Service (OPUS) to more accurately define the base station position. The OPUS solution was referenced to the International Terrestrial Reference Frame of 2000 (ITRF00), which is equivalent at the centimeter scale to WGS84. The OPUS solutions and corrections for the base stations are given in Appendix 1.

The OPUS solution provides an orthometric elevation relative to the North American Vertical Datum of 1988 (NAVD88) by subtracting the geoid99 separation from the North American Datum of 1983 (NAD83) ellipsoid height. The WGS84 ellipsoid height was referenced to NAVD88 by calculating the geoid separation at the base station by first subtracting the NAVD88 orthometric height of the NAD83 reference frame from the WGS84 ellipsoid height, and then subtracting this geoid separation value from each WGS84 ellipsoid height recorded. The WGS84 longitude and latitude values were converted to Universal Transverse Mercator (UTM) coordinates in Zone 12 North using the GRS 1980 ellipsoid with the NAD83 datum transform. After the conversion of the coordinates to UTM, the OPUS corrections were applied to the base station and rover data, resulting in positional information with centimeter-scale accuracy (Appendix 2).

The roving RTK GPS receiver, a Leica GX1230[®], was used to survey the location of 47 ground-control targets evenly spaced along the trail. The roving GPS receiver logged data at 1 Hz and has a horizontal and vertical accuracy of approximately 2 centimeters.

Comparison of Ground-Control Target GPS Coordinates to Orthorectified Aerial Photographs

	Count	Minimum	Maximum	Sum	Mean	Standard deviation
Reference Orthophotos	41	1.99	6.47	141.63	3.45	1.10
2006 Aerial Photography	42	1.36	5.86	130.22	3.10	1.22

Count = Number of pairs of points
 Minimum = Minimum distance between pairs of points
 Maximum = Maximum distance between pairs of points
 Sum = Sum of distances between the pairs of points
 Mean = Average distance between the pairs of points
 Standard Deviation = One standard deviation of the distance between pairs of points

NOTE: Reference Orthophotos (National Agriculture Imagery Program - NAIP) were acquired in late July, August, and early September of 2006. Thirty-seven of forty-two field markers from the GPS survey were visible in the NAIP photography, four other points were located with reference to surrounding features, and one point could not be identified.

OPUS Solution Information.

FILE: 047_1720.06o 000506797 **BASE STATION 047**

NGS OPUS SOLUTION REPORT

=====

USER: rmcDouga@usgs.gov	DATE: June 29, 2006
RINEX FILE: 047_172t.06o	TIME: 20:22:00 UTC
SOFTWARE: page5 0601.10 master4.pl	START: 2006/06/21 19:15:00
EPHEMERIS: igr13803.eph [rapid]	STOP: 2006/06/21 21:49:30
NAV FILE: brdc1720.06n	OBS USED: 4296 / 4360 : 99%
ANT NAME: LEIAX1202 NONE	# FIXED AMB: 26 / 26 : 100%
ARP HEIGHT: 1.704	OVERALL RMS: 0.015 (m)

REF FRAME: NAD_83 (CORS96) (EPOCH:2002.0000) ITRF00 (EPOCH:2006.4708)

X:	-1502864.023 (m)	0.014 (m)	-1502864.739 (m)	0.014 (m)
Y:	-4469825.661 (m)	0.025 (m)	-4469824.390 (m)	0.025 (m)
Z:	4283440.759 (m)	0.019 (m)	4283440.722 (m)	0.019 (m)

LAT:	42 26 29.25706	0.008 (m)	42 26 29.27753	0.008 (m)
E LON:	251 24 57.97549	0.009 (m)	251 24 57.92809	0.009 (m)
W LON:	108 35 2.02451	0.009 (m)	108 35 2.07191	0.009 (m)
EL HGT:	2256.235 (m)	0.032 (m)	2255.489 (m)	0.032 (m)
ORTHO HGT:	2268.265 (m)	0.041 (m)	[Geoid03 NAVD88]	

	UTM COORDINATES	STATE PLANE COORDINATES
	UTM (Zone 12)	SPC (4903 WYWC)
Northing (Y) [meters]	4701621.225	215624.357
Easting (X) [meters]	698712.380	613665.486
Convergence [degrees]	1.63100780	0.11209343
Point Scale	1.00008585	0.99993980
Combined Factor	0.99973209	0.99958609

US NATIONAL GRID DESIGNATOR: 12TXN9871201621 (NAD 83)

BASE STATIONS USED

PID	DESIGNATION	LATITUDE	LONGITUDE	DISTANCE (m)
DG5942	BLW2 BOULDER CORS ARP	N424601.636	W1093328.036	87755.5
AI5435	CASP CASPER CORS ARP	N424908.998	W1062302.614	185306.4
AH8659	MBWW MEDICINE BOW CORS ARP	N415412.887	W1061111.503	206951.6

NEAREST NGS PUBLISHED CONTROL POINT

NS0209	ROCK	N422541.476	W1083623.945	2382.9
--------	------	-------------	--------------	--------

FILE: BASE1730.06o 000506799 **BASE STATION 028**

NGS OPUS SOLUTION REPORT
 =====

USER: rmcDouga@usgs.gov	DATE: June 29, 2006
RINEX FILE: base173r.06o	TIME: 20:17:54 UTC
SOFTWARE: page5 0601.10 master10.pl	START: 2006/06/22 17:33:00
EPHEMERIS: igr13804.eph [rapid]	STOP: 2006/06/22 22:20:00
NAV FILE: brdc1730.06n	OBS USED: 7608 / 7986 : 95%
ANT NAME: LEIAX1202 NONE	# FIXED AMB: 42 / 46 : 91%
ARP HEIGHT: 1.754	OVERALL RMS: 0.022 (m)

REF FRAME: NAD_83 (CORS96) (EPOCH:2002.0000) ITRF00 (EPOCH:2006.4735)

X:	-1486332.746 (m)	0.008 (m)	-1486333.462 (m)	0.008 (m)
Y:	-4472884.131 (m)	0.004 (m)	-4472882.860 (m)	0.004 (m)
Z:	4285668.318 (m)	0.007 (m)	4285668.280 (m)	0.007 (m)

LAT:	42 28 13.67599	0.008 (m)	42 28 13.69653	0.008 (m)
E LON:	251 37 6.34613	0.007 (m)	251 37 6.29886	0.007 (m)
W LON:	108 22 53.65387	0.007 (m)	108 22 53.70114	0.007 (m)
EL HGT:	2033.432 (m)	0.001 (m)	2032.684 (m)	0.001 (m)
ORTHO HGT:	2045.953 (m)	0.025 (m)	[Geoid03 NAVD88]	

	UTM COORDINATES	STATE PLANE COORDINATES
	UTM (Zone 12)	SPC (4903 WYWC)
Northing (Y) [meters]	4705335.916	218898.526
Easting (X) [meters]	715254.181	630296.913
Convergence [degrees]	1.76866720	0.24876918
Point Scale	1.00017011	0.99994879
Combined Factor	0.99985125	0.99963000

US NATIONAL GRID DESIGNATOR: 12TYN1525405336 (NAD 83)

BASE STATIONS USED

PID	DESIGNATION	LATITUDE	LONGITUDE	DISTANCE (m)
DG5942	BLW2 BOULDER CORS ARP	N424601.636	W1093328.036	102004.2
AI5435	CASP CASPER CORS ARP	N424908.998	W1062302.614	168370.2
AH8659	MBWW MEDICINE BOW CORS ARP	N415412.887	W1061111.503	191995.5

NEAREST NGS PUBLISHED CONTROL POINT

NS0198	STORM	N422856.209	W1082143.432	2072.4
--------	-------	-------------	--------------	--------

30 Aerial-Photographic Assessment of the Mormon Pioneer National Historic Trail, Fremont County, Wyoming

FILE: BASE1740.06o 000506802 **BASE STATION 005**

NGS OPUS SOLUTION REPORT
 =====

USER: rmcDouga@usgs.gov DATE: June 29, 2006
 RINEX FILE: base174p.06o TIME: 20:28:36 UTC

SOFTWARE: page5 0601.10 master25.pl START: 2006/06/23 15:59:00
 EPHEMERIS: igr13805.eph [rapid] STOP: 2006/06/23 19:44:30
 NAV FILE: brdc1740.06n OBS USED: 7265 / 7319 : 99%
 ANT NAME: LEIAX1202 NONE # FIXED AMB: 34 / 34 : 100%
 ARP HEIGHT: 1.72 OVERALL RMS: 0.013 (m)

REF FRAME: NAD_83 (CORS96) (EPOCH:2002.0000) ITRF00 (EPOCH:2006.4760)

X:	-1474203.614 (m)	0.015 (m)	-1474204.330 (m)	0.015 (m)
Y:	-4472830.421 (m)	0.026 (m)	-4472829.150 (m)	0.026 (m)
Z:	4289835.939 (m)	0.020 (m)	4289835.901 (m)	0.020 (m)

LAT:	42 31 17.75076	0.013 (m)	42 31 17.77137	0.013 (m)
E LON:	251 45 29.72608	0.007 (m)	251 45 29.67887	0.007 (m)
W LON:	108 14 30.27392	0.007 (m)	108 14 30.32113	0.007 (m)
EL HGT:	2001.431 (m)	0.033 (m)	2000.681 (m)	0.033 (m)
ORTHO HGT:	2014.099 (m)	0.042 (m)	[Geoid03 NAVD88]	

	UTM COORDINATES	STATE PLANE COORDINATES
	UTM (Zone 12)	SPC (4903 WYWC)
Northing (Y) [meters]	4711378.572	224637.469
Easting (X) [meters]	726565.024	641761.301
Convergence [degrees]	1.86500913	0.34351979
Point Scale	1.00023160	0.99995895
Combined Factor	0.99991774	0.99964517

US NATIONAL GRID DESIGNATOR: 12TYN2656511379 (NAD 83)

BASE STATIONS USED

PID	DESIGNATION	LATITUDE	LONGITUDE	DISTANCE (m)
DG5942	BLW2 BOULDER CORS ARP	N424601.636	W1093328.036	111355.5
AI5435	CASP CASPER CORS ARP	N424908.998	W1062302.614	155867.6
AH8659	MBWW MEDICINE BOW CORS ARP	N415412.887	W1061111.503	183111.0

NEAREST NGS PUBLISHED CONTROL POINT

NS0161	GRAVEL	N423103.286	W1081437.043	473.1
--------	--------	-------------	--------------	-------

FILE: BASE1741.06o 000506803 BASE STATION 010

NGS OPUS SOLUTION REPORT

=====

USER: rmcDouga@usgs.gov DATE: June 29, 2006
 RINEX FILE: base174u.06o TIME: 20:30:12 UTC

SOFTWARE: page5 0601.10 master24.pl START: 2006/06/23 20:31:00
 EPHEMERIS: igr13805.eph [rapid] STOP: 2006/06/23 22:07:00
 NAV FILE: brdc1740.06n OBS USED: 2636 / 2695 : 98%
 ANT NAME: LEIAX1202 NONE # FIXED AMB: 24 / 24 : 100%
 ARP HEIGHT: 1.67 OVERALL RMS: 0.015 (m)

REF FRAME: NAD_83 (CORS96) (EPOCH:2002.0000) ITRF00 (EPOCH:2006.4764)

X:	-1478229.509 (m)	0.004 (m)	-1478230.225 (m)	0.004 (m)
Y:	-4473632.785 (m)	0.021 (m)	-4473631.513 (m)	0.021 (m)
Z:	4287645.125 (m)	0.019 (m)	4287645.087 (m)	0.019 (m)

LAT:	42 29 41.12815	0.003 (m)	42 29 41.14876	0.003 (m)
E LON:	251 42 53.33066	0.003 (m)	251 42 53.28343	0.003 (m)
W LON:	108 17 6.66934	0.003 (m)	108 17 6.71657	0.003 (m)
EL HGT:	2012.874 (m)	0.028 (m)	2012.123 (m)	0.028 (m)
ORTHO HGT:	2025.543 (m)	0.038 (m)	[Geoid03 NAVD88]	

	UTM COORDINATES	STATE PLANE COORDINATES
	UTM (Zone 12)	SPC (4903 WYWC)
Northing (Y) [meters]	4708282.753	221635.731
Easting (X) [meters]	723091.835	638208.098
Convergence [degrees]	1.83467325	0.31399627
Point Scale	1.00021239	0.99995545
Combined Factor	0.99989673	0.99963988

US NATIONAL GRID DESIGNATOR: 12TYN2309208283 (NAD 83)

BASE STATIONS USED

PID	DESIGNATION	LATITUDE	LONGITUDE	DISTANCE (m)
DG5942	BLW2 BOULDER CORS ARP	N424601.636	W1093328.036	108717.9
AI5435	CASP CASPER CORS ARP	N424908.998	W1062302.614	160028.1
AH8659	MBWW MEDICINE BOW CORS ARP	N415412.887	W1061111.503	185398.9

NEAREST NGS PUBLISHED CONTROL POINT

NS0169	SHEEP	N423040.683	W1081624.592	2076.4
--------	-------	-------------	--------------	--------

32 Aerial-Photographic Assessment of the Mormon Pioneer National Historic Trail, Fremont County, Wyoming

FILE: 20061750.06o 000506804 **BASE STATION ROCKY RIDGE**

NGS OPUS SOLUTION REPORT
=====

USER: rmcDouga@usgs.gov DATE: June 29, 2006
RINEX FILE: 2006175r.06o TIME: 20:23:36 UTC

SOFTWARE: page5 0601.10 master10.pl START: 2006/06/24 17:22:00
EPHEMERIS: igr13806.eph [rapid] STOP: 2006/06/24 20:48:30
NAV FILE: brdc1750.06n OBS USED: 5673 / 5801 : 98%
ANT NAME: LEIAX1202 NONE # FIXED AMB: 31 / 33 : 94%
ARP HEIGHT: 1.6135 OVERALL RMS: 0.021 (m)

REF FRAME: NAD_83 (CORS96) (EPOCH:2002.0000) ITRF00 (EPOCH:2006.4789)

X:	-1491175.471 (m)	0.012 (m)	-1491176.187 (m)	0.012 (m)
Y:	-4472037.307 (m)	0.041 (m)	-4472036.036 (m)	0.041 (m)
Z:	4285151.833 (m)	0.027 (m)	4285151.796 (m)	0.027 (m)

LAT:	42 27 45.45214	0.009 (m)	42 27 45.47267	0.009 (m)
E LON:	251 33 33.58021	0.005 (m)	251 33 33.53290	0.005 (m)
W LON:	108 26 26.41979	0.005 (m)	108 26 26.46710	0.005 (m)
EL HGT:	2220.283 (m)	0.050 (m)	2219.535 (m)	0.050 (m)
ORTHO HGT:	2232.661 (m)	0.056 (m)	[Geoid03 NAVD88]	

	UTM COORDINATES	STATE PLANE COORDINATES
	UTM (Zone 12)	SPC (4903 WYWC)
Northing (Y) [meters]	4704316.965	218008.289
Easting (X) [meters]	710421.571	625440.001
Convergence [degrees]	1.72845806	0.20883116
Point Scale	1.00014480	0.99994546
Combined Factor	0.99979666	0.99959739

US NATIONAL GRID DESIGNATOR: 12TYN1042204317 (NAD 83)

BASE STATIONS USED

PID	DESIGNATION	LATITUDE	LONGITUDE	DISTANCE (m)
DG5942	BLW2 BOULDER CORS ARP	N424601.636	W1093328.036	97731.7
AI5435	CASP CASPER CORS ARP	N424908.998	W1062302.614	173301.5
AH8659	MBWW MEDICINE BOW CORS ARP	N415412.887	W1061111.503	196351.2

NEAREST NGS PUBLISHED CONTROL POINT

NS0207	MINE	N422649.419	W1082951.375	4986.7
--------	------	-------------	--------------	--------

FILE: BASE1760.06o 000506806 BASE STATION 051

NGS OPUS SOLUTION REPORT
 =====

USER: rmcDouga@usgs.gov DATE: June 29, 2006
 RINEX FILE: base176p.06o TIME: 20:36:20 UTC

SOFTWARE: page5 0601.10 master29.pl START: 2006/06/25 15:52:00
 EPHEMERIS: igr13810.eph [rapid] STOP: 2006/06/25 17:35:00
 NAV FILE: brdc1760.06n OBS USED: 4103 / 4150 : 99%
 ANT NAME: LEIAX1202 NONE # FIXED AMB: 26 / 26 : 100%
 ARP HEIGHT: 1.5975 OVERALL RMS: 0.012(m)

REF FRAME: NAD_83(CORS96) (EPOCH:2002.0000) ITRF00 (EPOCH:2006.4814)

X:	-1503887.418(m)	0.018(m)	-1503888.134(m)	0.018(m)
Y:	-4469141.078(m)	0.031(m)	-4469139.807(m)	0.031(m)
Z:	4283819.244(m)	0.011(m)	4283819.207(m)	0.011(m)

LAT:	42 26 45.35849	0.015(m)	42 26 45.37895	0.015(m)
E LON:	251 24 5.99997	0.012(m)	251 24 5.95255	0.012(m)
W LON:	108 35 54.00003	0.012(m)	108 35 54.04745	0.012(m)
EL HGT:	2273.610(m)	0.033(m)	2272.864(m)	0.033(m)
ORTHO HGT:	2285.579(m)	0.041(m)	[Geoid03 NAVD88]	

	UTM COORDINATES	STATE PLANE COORDINATES
	UTM (Zone 12)	SPC (4903 WYWC)
Northing (Y) [meters]	4702084.181	216118.930
Easting (X) [meters]	697510.835	612476.806
Convergence [degrees]	1.62139358	0.10235908
Point Scale	1.00007999	0.99993941
Combined Factor	0.99972351	0.99958298

US NATIONAL GRID DESIGNATOR: 12TXN9751102084 (NAD 83)

BASE STATIONS USED

PID	DESIGNATION	LATITUDE	LONGITUDE	DISTANCE (m)
DG8517	AHID AUBURN HATCHERY CORS ARP	N424623.209	W1110349.416	205589.5
DG5942	BLW2 BOULDER CORS ARP	N424601.636	W1093328.036	86468.4
AI5435	CASP CASPER CORS ARP	N424908.998	W1062302.614	186343.0

NEAREST NGS PUBLISHED CONTROL POINT

NS0209	ROCK	N422541.476	W1083623.945	2090.2
--------	------	-------------	--------------	--------

34 Aerial-Photographic Assessment of the Mormon Pioneer National Historic Trail, Fremont County, Wyoming

FILE: BASE1761.06o 000506809 **BASE STATION 019**

NGS OPUS SOLUTION REPORT

=====

USER: rmcDouga@usgs.gov DATE: June 29, 2006
 RINEX FILE: base176v.06o TIME: 20:36:53 UTC

SOFTWARE: page5 0601.10 master23.pl START: 2006/06/25 21:11:00
 EPHEMERIS: igr13810.eph [rapid] STOP: 2006/06/25 21:39:00
 NAV FILE: brdc1760.06n OBS USED: 697 / 728 : 96%
 ANT NAME: LEIAX1202 NONE # FIXED AMB: 7 / 13 : 54%
 ARP HEIGHT: 1.614 OVERALL RMS: 0.010 (m)

REF FRAME: NAD_83 (CORS96) (EPOCH:2002.0000) ITRF00 (EPOCH:2006.4819)

X:	-1487319.494 (m)	1.654 (m)	-1487320.210 (m)	1.654 (m)
Y:	-4472146.191 (m)	1.399 (m)	-4472144.920 (m)	1.399 (m)
Z:	4286191.160 (m)	1.686 (m)	4286191.122 (m)	1.686 (m)

LAT:	42 28 34.67952	0.125 (m)	42 28 34.70005	0.125 (m)
E LON:	251 36 15.17992	1.250 (m)	251 36 15.13263	1.250 (m)
W LON:	108 23 44.82008	1.250 (m)	108 23 44.86737	1.250 (m)
EL HGT:	2099.573 (m)	2.464 (m)	2098.825 (m)	2.464 (m)
ORTHO HGT:	2112.050 (m)	2.464 (m)	[Geoid03 NAVD88]	

	UTM COORDINATES	STATE PLANE COORDINATES
	UTM (Zone 12)	SPC (4903 WYWC)
Northing (Y) [meters]	4705947.824	219541.600
Easting (X) [meters]	714065.810	629125.448
Convergence [degrees]	1.75925512	0.23919893
Point Scale	1.00016383	0.99994793
Combined Factor	0.99983461	0.99961878

US NATIONAL GRID DESIGNATOR: 12TYN1406605948 (NAD 83)

BASE STATIONS USED

PID	DESIGNATION	LATITUDE	LONGITUDE	DISTANCE (m)
DG5942	BLW2 BOULDER CORS ARP	N424601.636	W1093328.036	100687.9
AI5435	CASP CASPER CORS ARP	N424908.998	W1062302.614	169352.1
AH8659	MBWW MEDICINE BOW CORS ARP	N415412.887	W1061111.503	193310.3

NEAREST NGS PUBLISHED CONTROL POINT

NS0198	STORM	N422856.209	W1082143.432	2847.3
--------	-------	-------------	--------------	--------

FILE: 20061760.06o 000506815 BASE 38 39

NGS OPUS SOLUTION REPORT

=====

USER: rmcDouga@usgs.gov DATE: June 29, 2006
 RINEX FILE: 2006176s.06o TIME: 20:31:33 UTC

SOFTWARE: page5 0601.10 master10.pl START: 2006/06/25 18:34:00
 EPHEMERIS: igr13810.eph [rapid] STOP: 2006/06/25 20:06:00
 NAV FILE: brdc1760.06n OBS USED: 2364 / 2398 : 99%
 ANT NAME: LEIAX1202 NONE # FIXED AMB: 19 / 19 : 100%
 ARP HEIGHT: 1.604 OVERALL RMS: 0.014 (m)

REF FRAME: NAD_83 (CORS96) (EPOCH:2002.0000) ITRF00 (EPOCH:2006.4817)

X:	-1496147.741 (m)	0.014 (m)	-1496148.457 (m)	0.014 (m)
Y:	-4471513.091 (m)	0.054 (m)	-4471511.820 (m)	0.054 (m)
Z:	4284002.103 (m)	0.025 (m)	4284002.066 (m)	0.025 (m)

LAT:	42 26 54.39465	0.026 (m)	42 26 54.41516	0.026 (m)
E LON:	251 29 59.98384	0.004 (m)	251 29 59.93649	0.004 (m)
W LON:	108 30 0.01616	0.004 (m)	108 30 0.06351	0.004 (m)
EL HGT:	2239.597 (m)	0.058 (m)	2238.850 (m)	0.058 (m)
ORTHO HGT:	2251.830 (m)	0.063 (m)	[Geoid03 NAVD88]	

	UTM COORDINATES	STATE PLANE COORDINATES
	UTM (Zone 12)	SPC (4903 WYWC)
Northing (Y) [meters]	4702596.517	216416.869
Easting (X) [meters]	705589.550	620564.978
Convergence [degrees]	1.68790282	0.16872918
Point Scale	1.00012007	0.99994270
Combined Factor	0.99976890	0.99959160

US NATIONAL GRID DESIGNATOR: 12TYN0559002597 (NAD 83)

BASE STATIONS USED

PID	DESIGNATION	LATITUDE	LONGITUDE	DISTANCE (m)
DG5942	BLW2 BOULDER CORS ARP	N424601.636	W1093328.036	93771.6
AI5435	CASP CASPER CORS ARP	N424908.998	W1062302.614	178419.5
AH8659	MBWW MEDICINE BOW CORS ARP	N415412.887	W1061111.503	200547.0

NEAREST NGS PUBLISHED CONTROL POINT

NS0207	MINE	N422649.419	W1082951.375	250.1
--------	------	-------------	--------------	-------

Appendix 2. Orthorectification and External Orientation Standard Operating Procedures

Overview of Processing Methods

The aerial photographs were orthorectified and georeferenced for use as a base for further Geographic Information System (GIS) analysis. The standard operating procedure for orthorectification on this project was developed by personnel from the GIS and Remote Sensing Team, U.S. Geological Survey Fort Collins Science Center, Fort Collins, Colorado. OrthoMapper® software by Image Processing Software, Inc., was used for the orthorectification process.

Reference control points were taken from the United States Department of Agriculture's (USDA) 2006 National Agricultural Imagery Program (NAIP) data set. The NAIP imagery has a 1-meter ground-sample distance (GSD) with a horizontal accuracy that matches within 5 m of a reference orthophoto image. For each unregistered photograph, a minimum of 13 control points were selected. Control points were evenly distributed throughout the image, but the placement of points near the corners and edges and near fiducial marks on the photographs was particularly important to correctly position the images. A 30-m resolution USGS digital elevation model (DEM) was used to correct terrain distortion in the orthorectification process.

After the reference control points were chosen and an acceptable root mean square (RMS) of less than 2.0 was achieved, tie points were selected from each digital aerial photograph to increase the accuracy of the mosaicking process. The number of tie points on each photograph ranged from 9 to 35. Tie points are used to snap equivalent features together between adjacent flight paths during the mosaic process.

Orthorectification Results for the Mormon Pioneer National Historic Trails Project

Internal (fiducial) orientation RMS values for columns exceeded 0.50 in only seven instances where the values were: 0.52, 0.52, 0.54, 0.54, 0.56, 0.57, 0.77. Row values never exceeded 0.50.

External (control-point) orientation RMS values for columns ranged from 6.32 to 60.65. External orientation RMS values for rows ranged from 6.99 to 55.29. Second-order RMS for all aerial photos ranged from 0.5 to 3.1. The number of control points per aerial photo ranged from 18 to 43. The map projection for this project is Universal Transverse Mercator (UTM), Zone 12 North, using the North American Datum for 1983 (NAD83).

Comparison of GPS survey points between USGS NAIP* reference orthophotos and June 2006 orthorectified aerial photography. Units are in meters.

	Count ¹	Minimum ²	Maximum ³	Sum ⁴	Mean ⁵	Standard deviation ⁶
Reference Orthophotos	41	1.99	6.47	141.63	3.45	1.10
2006 Aerial Photography	42	1.36	5.86	130.22	3.10	1.22

¹ = number of pairs of points.

² = minimum distance between pairs of points.

³ = maximum distance between pairs of points.

⁴ = sum of distances between the pairs of points.

⁵ = average distance between the pairs of points.

⁶ = 1 Standard deviation.

*Reference Orthophotos (National Agriculture Imagery Program - NAIP) were acquired in late July, August, and early September of 2006. Thirty-seven of 42 field markers from the GPS survey were visible in the NAIP photography, 4 other points were located with reference to surrounding features, and 1 point could not be identified.

Coordinates of field positions of ground-control points.

Survey Point	lat degrees	lat minutes	lat seconds	long degrees	long minutes	long seconds	latitude dec deg	longitude dec deg	UTM easting	UTM northing	Elevation (m)
BASE005	42	31	17.79952	-108	14	30.32733	42.52161098	-108.2417576	726563.6955	4711380.034	2003.0336
MHCT001	42	31	41.77624	-108	12	5.60883	42.52827118	-108.201558	729841.5682	4712227.953	2000.774
MHCT002	42	31	29.38108	-108	12	15.47894	42.52482808	-108.2042997	729628.9922	4711838.157	1997.3655
MHCT003	42	31	50.64658	-108	12	42.9527	42.53073516	-108.2119313	728980.522	4712473.479	1988.998
MHCT004	42	31	21.06842	-108	13	29.00178	42.52251901	-108.2247227	727959.805	4711526.565	1994.4856
MHCT006	42	30	44.9388	-108	15	27.90625	42.512483	-108.2577517	725282.7144	4710323.701	2026.4055
MHCT007	42	30	48.30357	-108	16	8.54951	42.51341766	-108.2690415	724351.8207	4710397.534	2058.7839
MHCT008	42	30	21.06277	-108	16	33.87571	42.50585077	-108.2760766	723800.8543	4709538.626	2068.266
MHCT009	42	29	57.07135	-108	17	7.80172	42.49918649	-108.2855005	723050.2306	4708773.711	2031.6816
BASE047	42	26	29.27924	-108	35	2.04421	42.44146646	-108.5839012	698711.9078	4701621.881	2257.5747
MHCT042	42	26	22.29931	-108	32	11.09986	42.43952759	-108.5364166	702623.7433	4701518.878	2233.1139
MHCT043	42	25	58.78996	-108	32	58.11969	42.43299721	-108.5494777	701570.3812	4700762.594	2220.1219
MHCT045	42	25	59.02513	-108	33	45.69919	42.43306254	-108.5626942	700482.9755	4700738.54	2258.7799
MHCT046	42	26	16.36193	-108	35	4.53421	42.43787831	-108.5845928	698666.3661	4701221.811	2274.1664
MHCT048	42	26	20.02773	-108	36	9.71068	42.43889659	-108.6026974	697173.9956	4701292.658	2259.5111
BASE028	42	28	13.69255	-108	22	53.68473	42.47047015	-108.3815791	715253.4598	4705336.39	2034.1605
MHCT015	42	29	59.83629	-108	21	11.0701	42.49995453	-108.353075	717494.6206	4708683.352	2106.7745
MHCT016	42	29	44.19496	-108	22	13.73258	42.49560971	-108.3704813	716079.2465	4708156.337	2081.0362
MHCT017	42	29	17.85264	-108	23	14.79326	42.4882924	-108.3874426	714710.4205	4707300.655	2081.9877
MHCT018	42	28	44.97831	-108	22	51.9265	42.47916064	-108.3810907	715263.8043	4706302.695	2087.9397
MHCT019	42	28	34.69814	-108	23	44.85247	42.47630504	-108.3957924	714065.0493	4705948.36	2100.3374
MHCT020	42	28	24.40588	-108	24	43.04332	42.47344608	-108.4119565	712745.9747	4705590.193	2092.8637
MHCT022	42	29	22.21457	-108	19	31.37507	42.48950405	-108.325382	719806.889	4707594.282	2018.9997
MHCT023	42	29	12.79375	-108	19	7.31193	42.48688715	-108.3186978	720365.4415	4707321.033	2011.2173
MHCT024	42	28	50.46824	-108	20	46.48027	42.48068562	-108.3462445	718122.9025	4706561.112	2017.361
MHCT025	42	29	1.56067	-108	21	1.56603	42.48376685	-108.350435	717767.7525	4706892.506	2033.111
MHCT026	42	28	34.70784	-108	22	0.318	42.47630773	-108.366755	716452.0546	4706022.384	2033.3464
MHCT027	42	28	39.83661	-108	22	1.18247	42.47773239	-108.3669951	716427.4041	4706179.978	2043.403
MHCT029	42	27	48.03752	-108	23	39.13637	42.46334376	-108.3942045	714239.8118	4704513.043	2036.3922
BASE010	42	29	41.13739	-108	17	6.70166	42.49476039	-108.2851949	723091.0883	4708282.999	2013.9464
MHCT011	42	29	45.12659	-108	17	58.47595	42.4958685	-108.2995767	721905.2547	4708368.295	2020.6496
MHCT012	42	29	57.69037	-108	19	24.84382	42.49935844	-108.3235677	719921.4456	4708693.311	2051.3244
MHCT013	42	29	41.42678	-108	19	21.76436	42.49484077	-108.3227123	720007.5862	4708193.847	2037.7803
MHCT014	42	29	41.79501	-108	20	42.45095	42.49494306	-108.3451253	718165.3124	4708147.266	2056.7507
MHCT021	42	29	28.85278	-108	18	9.12414	42.49134799	-108.3025345	721678.1606	4707858.555	2007.5371

Coordinates of field positions of ground-control points. —Continued

Survey Point	lat degrees	lat minutes	lat seconds	long degrees	long minutes	long seconds	latitude dec deg	longitude dec deg	UTM easting	UTM northing	Elevation (m)
ROCKYRIDGE	42	27	45.48976	-108	26	26.44428	42.46263604	-108.440679	710420.9746	4704318.092	2219.9678
MHCT031	42	27	39.38279	-108	24	55.79556	42.46093966	-108.4154988	712497.0938	4704192.497	2122.529
MHCT032	42	27	45.60794	-108	25	52.13177	42.46266887	-108.4311477	711204.551	4704345.431	2184.7241
MHCT033	42	28	9.89679	-108	26	14.39699	42.46941578	-108.4373325	710673.3817	4705079.276	2212.7907
MHCT034	42	27	31.79586	-108	26	45.16157	42.45883218	-108.4458782	710006.2043	4703882.795	2207.0012
MHCT035	42	27	10.66266	-108	27	14.86996	42.45296185	-108.4541305	709347.2051	4703210.508	2206.2141
MHCT036	42	27	1.15541	-108	27	1.73337	42.45032095	-108.4504815	709656.0946	4702926.255	2201.4665
BASE051	42	26	45.37782	-108	35	54.04114	42.44593828	-108.5983448	697509.8759	4702084.735	2277.139
MHCT044NEW	42	25	59.55112	-108	32	59.77687	42.43320864	-108.549938	701531.8388	4700784.979	2219.0028
MHCT049	42	26	2.90576	-108	37	25.97166	42.43414049	-108.623881	695446.378	4700715.505	2244.4198
MHCT050	42	26	25.22796	-108	37	28.18555	42.4403411	-108.624496	695376.5143	4701402.642	2233.4081
BASE38 39	42	26	54.46619	-108	30	0.04216	42.44846283	-108.5000117	705588.8916	4702598.69	2237.3028
MHCT037	42	26	58.97865	-108	28	35.4996	42.44971629	-108.4765277	707516.0933	4702795.064	2201.9913
MHCT038	42	26	46.40431	-108	29	22.89331	42.44622342	-108.4896926	706444.9006	4702375.07	2207.3208
MHCT039	42	27	0.77271	-108	30	31.29624	42.45021464	-108.5086934	704869.1913	4702772.221	2234.5478
MHCT040	42	26	40.01246	-108	31	16.2622	42.44444791	-108.5211839	703860.7042	4702101.753	2230.4423
MHCT041	42	26	55.16762	-108	31	41.87169	42.44865767	-108.5282977	703262.005	4702552.165	2258.3124
SECTION34 35	42	26	40.96059	-108	31	16.93752	42.44471128	-108.5213715	703844.4205	4702130.549	2231.4773
BASE019	42	28	34.64745	-108	23	44.88711	42.47629096	-108.395802	714064.3082	4705946.773	2097.0855
MHCT030	42	28	2.14151	-108	23	2094.0199	42.46726153	-108.9650055	667297.9974	4703664.206	2094.0199

Standard Operating Procedures

9" X 9" Aerial Photograph Orthorectification Analog Camera with a Camera Calibration Report

Digital Data Entry Facility
GIS and Remote Sensing Team
USGS Fort Collins Science Center
March 30, 2007

1. All orthorectification projects will be stored in the N:\Orthorectification directory and named in accordance with the standard N:\Active naming convention. Before starting a project, review the Orthorectification Project Assignment Sheet for detailed project instructions (refer to separate documentation). Copy the Microsoft Excel template spreadsheet (N:\Ortho\TEMPLATE_Project_Document_File.xls) to the Doc directory for the project and complete the information for each aerial photo as it is orthorectified.

The Project Document File will be located in the Doc directory for each project and will include the following:

Scanned Photo Name – Original scanned file name for an aerial photograph.

Uncompressed File Name – Name of uncompressed original file. This will be required for the Wyoming Historic Trails project.

Rotated File Name – If the original scanned file does not have the data strip on the left side, the image must be rotated so that the data strip is on the left side.

Source of DOQQ – Where we obtained the DOQQ.

Original DOQQ – Name of the original DOQQ used for orthorectification.

Source of DEM – Where we obtained the DEM.

Original DEM – Name of the original DEM used for orthorectification.

Fiducial Col RMS – Final value read from the OrthoMapper display.

Fiducial Row RMS – Final value read from the OrthoMapper display.

Control Points – Number of control points used for the final orthorectification.

Control Point Column RMS - Final value read from the OrthoMapper display.

Control Point Row RMS - Final value read from the OrthoMapper display.

GPS Point – A YES entry is required if the control point was acquired with a GPS receiver.

2nd Order RMS - Final value read from the OrthoMapper display at the time of actual orthorectification.

Orthophoto Product Name – Name of the final orthophoto.

Rectified By – Last name of person performing the orthorectification.

Final Quality Check By – Last name of person performing the final QC on the orthophoto.

Final Quality Check: The final QC check will consist of running ORIENT in OrthoMapper, checking the placement of the control points, and checking the column and row RMS. This will be followed by displaying the output orthophoto on top of the reference orthophoto and checking points in the four corners for offset.

The acceptable offset distance will vary with the project:

Lassen Volcanic National Park – 3 to 5 meters, most should be less than 3 meters.

Wyoming Historic Trails – 3 – 5 meters, most should be less than 3 meters.

Diane Schneider will perform the final quality check for Hannah Moyer, Colin Talbert, and Bob Waltermire.

2. Aerial photographs must be scanned at 600 dots per inch (DPI) with the data strip on the left side. The data strip is defined by the frame number. It will be in one corner of the image and in orange, red, or some other color. The title line could be anywhere on the aerial photo and does not have any relations to the data strip. If the aerial photo is already scanned, and the data strip is not on the left side, use IrfanView to rotate the image. For example, if the data strip is on the bottom of the scanned image, use Irfan View to “rotate right” and save as a TIFF file. Irfan View should also be used to determine the scanned resolution of imagery obtained from outside sources.

40 Aerial-Photographic Assessment of the Mormon Pioneer National Historic Trail, Fremont County, Wyoming

Example: The Lassen Volcanic National Park (LAVO) project has the title line on the north side of the aerial photo. The data strip is either on the north side (when the plane is flying south) or on the south side (when the plane is flying north). Refer to Figure A for an example.

3. OrthoMapper (OM) software by Image Processing Software, Inc. will be used for orthorectification. OM may work better if the aerial photo to be orthorectified is converted in OM to a .LAN file using **Utilities|File Conversion|Create LAN/DEM from TIF/IMG file**. OM will, however, also work by accessing the aerial photo as a TIFF file.

4. The **Utilities|File Conversion|Create LAN/DEM from TIF/IMG file** also must be used to convert the digital elevation model (DEM) to an OM .DEM file.

The 10-meter USGS DEMs must be used unless only the 30-meter USGS DEMs are available.

Suggested sources for DEM data:

Seamless Data Distribution System: <http://seamless.usgs.gov/>
GeoCommunity: <http://data.geocomm.com/>
TerraServer <http://www.terraserver.com/>
USDA Geospatial Data Gateway <http://datagateway.nrcs.usda.gov/>

5. The digital orthophoto can be added to OM as a .LAN file. The .LAN file should be created using the OM **Utilities|File Conversion|Create LAN/DEM from TIF/IMG file**. If OM will not accept the .LAN file (you may see the message that OM could not read the orthophoto when it is entered in a .LAN format) it will accept a .TIFF file. The aerial photos, DEM, orthophoto and all other project files related to the orthorectification process must be stored in the same **Area Directory**.

The reference orthophoto must be of USGS origin unless another source can be shown to be superior in detail and accuracy. For example, a DOQ with significant amounts of snow cover is likely to be inferior to a DOQ with lesser snow cover. **NAIP** data may have spatial accuracy equal to or exceeding the USGS DOQs (Stan Wilds , U.S. Geological Survey, personal communication, 2007,) and is likely to be more current.

Suggested sources for DOQ data:

Seamless Data Distribution System: <http://seamless.usgs.gov/>
GeoCommunity: <http://data.geocomm.com/>
TerraServer <http://www.terraserver.com/>
USDA Geospatial Data Gateway <http://datagateway.nrcs.usda.gov/>

Suggested source for NAIP data:

Aerial Photography Field Office: <http://165.221.201.14/NAIP.html>
USGS: USGS contacts at EROS Data Center

6. The map projection, datum, and units must be the same for the DOQ and the DEM used in the orthorectification, and for the desired orthorectified aerial photo output.

7. Execute OM and click on the **START** button. Activate the button for **Visual Orientation will be used with this project** and enter the orthophoto (as a TIFF) and the DEM (as a .DEM). Coordinates will be entered as meters. If OM will not accept the DEM, reboot the computer.

8. Activate the button for **Single Frame Camera**. Select the **Area Directory** that contains the data. Select the first aerial photo to process. OM will create a directory for the aerial photo and store the output orthophoto in that directory. Enter the following as:

Is this a digital camera? No.

Do you have a camera calibration report for this image? Yes.

You must enter the required data from the camera calibration report into OM which will build a camera calibration report file. Refer to Figure B, Parts 1 and 2, to view the correct data to enter into the OM camera calibration report file for the Wyoming Historic Trails Project. Camera- calibration information will be used during the orthorectification process and includes each of the following: Camera

42 Aerial-Photographic Assessment of the Mormon Pioneer National Historic Trail, Fremont County, Wyoming

13. Control points should be located on objects small enough that the data entry specialist (DES) must zoom in to see the object. Small shrubs, rocks, and other precisely identifiable ground features should be used. Control points should not be located on large objects lacking detail such as trees because it is unlikely the control point can be located precisely on the aerial photo and the reference orthophoto.

14. If the DES is certain a control point is accurately matched between the aerial photo being orthorectified and the reference orthophoto, the RMS error for the control point should be acceptable. The following is a guideline for acceptable error values for control point selection (modified from the OM manual). The data for the LAVO and Wyoming Historic Trails projects are given as examples. The following is used to calculate the number of pixels equivalent to 1-meter error and, therefore, the guide to acceptable RMS:

LAVO Example:

Aerial photo scale: 1:15,840

Aerial photo scanned at: 600 DPI

$15,840'' / 39.37''$ per m = 402 m (1'' on the aerial photo = 402 m on the ground)

402 m per inch / 600 DPI = 0.67 meters per pixel (size of a pixel in the aerial photo)

$1 / 0.67 = 1.5$ pixels in the aerial photo are equivalent to 1 m onsite

RMS of 1.50 represents a 1.0-meter error.

RMS of 2.25 represents a 1.5-meter error.

RMS of 3.00 represents a 2.0-meter error.

The objective is to minimize the RMS error and have a good fit to the reference orthophoto. We will strive for an $RMS \leq 2.0$. National Map Accuracy Standards require error no more than 1/50 inch at the specified scale. For example, for a 1:15,840-scale aerial photo displayed at that scale, the maximum acceptable error is 8 meters. When the orthorectified aerial photo is compared with the referenced orthophoto, the offset between identical features must not exceed 8 meters. The error should actually be less than 8 meters, because there is some error in the referenced orthophoto. **Feature displacement must not exceed 5.0 meters but displacement of < 3.0 meters should be the norm.**

Wyoming Historic Trails Example:

Aerial photo scale: 1:3,960

Aerial photo scanned at: 1814 DPI

$3,960'' / 39.37''$ per m = 100.5842 m (1'' on the aerial photo = 100.5842 m onsite)

100.5842 m per inch / 1814 DPI = 0.055 meters per pixel (size of a pixel in the aerial photo)

$1 / 0.055 = 18.03$ pixels in the aerial photo are equivalent to 1m on the ground

RMS of 18.0 represents a 1.0-meter error.

RMS of 27.0 represents a 1.5-meter error.

RMS of 36.1 represents a 2.0 meter error.

National Map Accuracy Standards require error no more than 1/50 inch at the specified scale. For example, for a 1:3,960-scale aerial photo displayed at that scale, the maximum acceptable error is 2.0 meters. When the orthorectified aerial photo is compared with the referenced orthophoto, the offset between identical features should not exceed 2.0 meters. The error should actually be less than 2.0 meters, because there is some error in the referenced orthophoto. **Our target is feature displacement ≤ 2.0 meters. We may need to accept a higher displacement value because we will be using a 1-meter DOQ.**

15. Enter tie points when enough control points have been added and the control point RMS is acceptable (refer to Figure E). Tie points are used to snap equivalent features together during the mosaic process. Tie points are located in the magenta boxes only if there are adjacent strips of aerial photography (one side or both sides). Tie points in the green boxes tie together adjacent aerial photos along the flight path. **Tie points must be located in a line perpendicular to the direction of the airplane's flight path (green boxes) and parallel to adjacent flight paths (magenta boxes).** One point must be located in the ends of each box that overlap adjacent aerial photos (two points per box). A tie point is any sharp, well-defined point and is located only on the aerial photo, not on the orthophoto. A tie point can even be the corner of a farm field.

16. When the **Visual (External) Orientation** and the location of **tie points** are completed, click on the **ORTHO** button on the main OM menu and the **Select Output Parameters for Orthophoto** dialog will appear. Confirm all input and be sure to turn on **Use Second Order Polynomial**. **The Standard Deviation for the Second Order Polynomial must be ≤ 2.0 for an aerial photo scanned at**

600 DPI and ≤ 27.0 for an aerial photo scanned at 1814 DPI. The orthophoto created by this process will be stored in the **Area Directory** and will have **_ORTHO.TIF** appended to the name of the source aerial photo.

17. After an aerial photo is orthorectified, it must be displayed over the base orthophoto and “blend”, “swipe”, or “flicker” used to check the accuracy. The center of the output orthophoto and the four edges must be checked. The edges are likely to have the highest error. **Feature displacement must not exceed 5.0 meters but displacement of < 3.0 meters should be the norm. These limits will be dependent on the quality of the reference DOQ and the resolution of the scanned aerial photo.**

18. The following process must be followed if the DES determines that any of these standard operating procedures must be altered for any aerial photo.

A. The DES must provide brief and thorough written documentation to the manager of the Digital Data Entry Facility (DDEF) defining the aerial photo in question, the nature of the problem, why the standard operating procedures should be altered, and the proposed alternative methodology. The *Alternative to SOP for Orthorectification* form will be used (refer to Figure F).

B. The manager of the DDEF will review the *Alternative to SOP for Orthorectification* form, view the aerial photo in question, and discuss procedures with the DES.

C. The DDEF manager will sign the *Alternative to SOP for Orthorectification* form if approval of alternative methods is warranted.


D. If the DES's request is approved, the signed *Alternative to SOP for Orthorectification* form will be incorporated into the metadata for the project and filed in the project folder for future reference.

44 Aerial-Photographic Assessment of the Mormon Pioneer National Historic Trail, Fremont County, Wyoming

A scanned aerial photograph showing the orientation of the title line and the frame number.

Title line: 8-8-04 USDA-F 16 615060 1004-75
Interpretation: Acquisition date: 8-8-04
Flown for: USDA-F (Forest Service)
Scale: 16 (=1:15,840)
Project number: 615060
Roll-Exposure: 1004-75

For this project, the title line indicates the north side of the aerial photo.

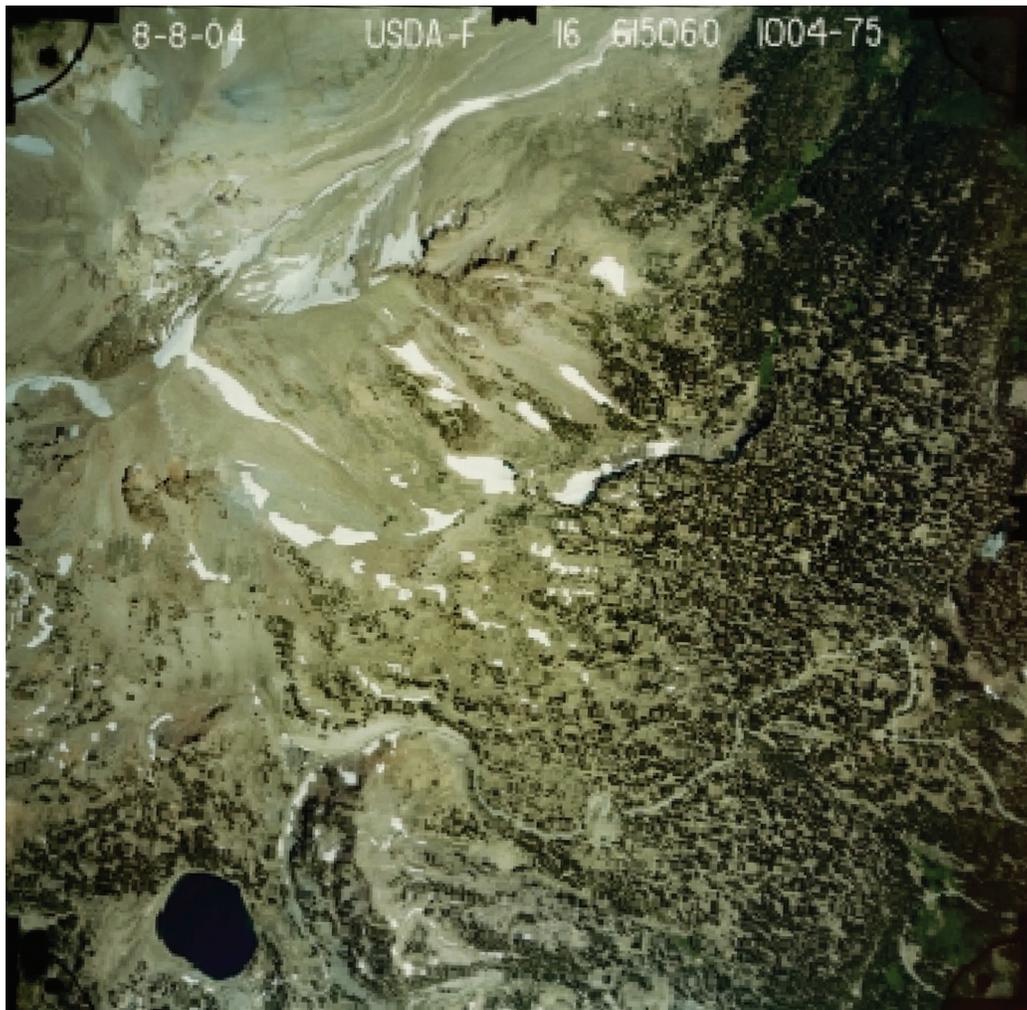

Date Strip: The edge of the aerial photo with the frame number. Example: 342.

Aerial Photography Camera Calibration Report for the Mormon Pioneer National Historic Trails project.

FROM : AERIAL SURVAYS INT FAX NO. : 3032619996 Feb. 07 2005 01:55PM P1

USGS Report No. OSL/3112



United States Department of the Interior

~~U.S. GEOLOGICAL SURVEY~~

Reston, Virginia 20192

December 17, 2004

**REPORT OF CALIBRATION
of Aerial Mapping Camera**

Camera type: Jena LMK 2015*	Camera serial no.: 275842
Lens type: Jena Lamegon PI/E	Lens serial no.: 275842E
Nominal focal length: 153 mm	Maximum aperture: f/4
	Test aperture: f/4

Submitted by: Aerial Surveys International
Watkins, Colorado

Reference: Aerial Surveys International letter of authorization with purchase order No. 120415A, dated December 7, 2004.

These measurements were made on Kodak Micro-flat glass plates, 0.25 inch thick, with spectroscopic emulsion type 157-01 Panchromatic, developed in D-19 at 68° F for 3 minutes with continuous agitation. These photographic plates were exposed on a multicollimator camera calibrator using a white light source rated at approximately 5200K.

I. **Calibrated Focal Length: 152.481 mm**

II. Lens Distortion

Field angle:	7.5°	15°	22.7°	30°	35°	40°
Symmetric radial (um)	-1	-1	0	1	1	-1
Decentering (um)	0	0	1	2	3	5

Symmetric radial distortion parameters	Decentering distortion parameters	Calibrated principal point
$K_0 = 0.3067 \times 10^{-4}$ $K_1 = -0.8862 \times 10^{-8}$ $K_2 = 0.4683 \times 10^{-12}$ $K_3 = 0.0000$ $K_4 = 0.0000$	$P_1 = 0.2268 \times 10^{-6}$ $P_2 = -0.1946 \times 10^{-6}$ $P_3 = 0.0000$ $P_4 = 0.0000$	$x_p = -0.004 \text{ mm}$ $y_p = 0.002 \text{ mm}$

The values and parameters for Calibrated Focal Length (CFL), Symmetric Radial Distortion (K_0, K_1, K_2, K_3, K_4), Decentering Distortion (P_1, P_2, P_3, P_4), and Calibrated Principal Point [point of symmetry] (x_p, y_p) were determined through a least-squares Simultaneous Multiframe Analytical Calibration (SMAC) adjustment. The x and y-coordinate measurements utilized in the adjustment of the above parameters have a standard deviation (σ) of ± 3 microns.

* Equipped with Forward Motion Compensation

(1 of 5)


AERIAL SURVAYS INT

FAX NO. : 3032619996

Feb. 07 2005 01:56PM P3

USGS Report No. OSL/3112

VII. Principal Points and Fiducial Coordinates

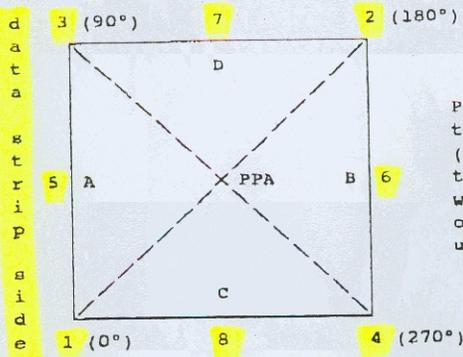

Positions of all points are referenced to the principal point of autocollimation (PPA) as origin. The diagram indicates the orientation of the reference points when the camera is viewed from the back, or a contact positive with the emulsion up. The data strip is to the left.

Indicated principal point, corner fiducials
 Indicated principal point, midside fiducials
 Principal point of autocollimation (PPA)
 Calibrated principal point (pt. of sym.) x_p, y_p

	X coordinate	Y coordinate
Indicated principal point, corner fiducials	0.015 mm	-0.005 mm
Indicated principal point, midside fiducials	0.013	-0.004
Principal point of autocollimation (PPA)	0.0	0.0
Calibrated principal point (pt. of sym.) x_p, y_p	-0.004	0.002

Fiducial Marks

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8

1	-109.986 mm	-110.006 mm
2	110.017	109.996
3	-109.984	109.990
4	110.019	-110.006
5	-111.990	-0.006
6	112.025	-0.001
7	0.012	111.990
8	0.014	-112.000

VIII. Distances Between Fiducial Marks


Corner fiducials (diagonals)
 1-2: 311.131 mm 3-4: 311.127 mm
 Lines joining these markers intersect at an angle of 90° 00' 04"

Midside fiducials
 5-6: 224.015 mm 7-8: 223.990 mm
 Lines joining these markers intersect at an angle of 89° 59' 57"

Corner fiducials (perimeter)
 1-3: 219.997 mm 2-3: 220.001 mm
 1-4: 220.006 mm 2-4: 220.003 mm


The method of measuring these distances is considered accurate within 0.003 mm

Placement of fiducials in relation to the data strip.

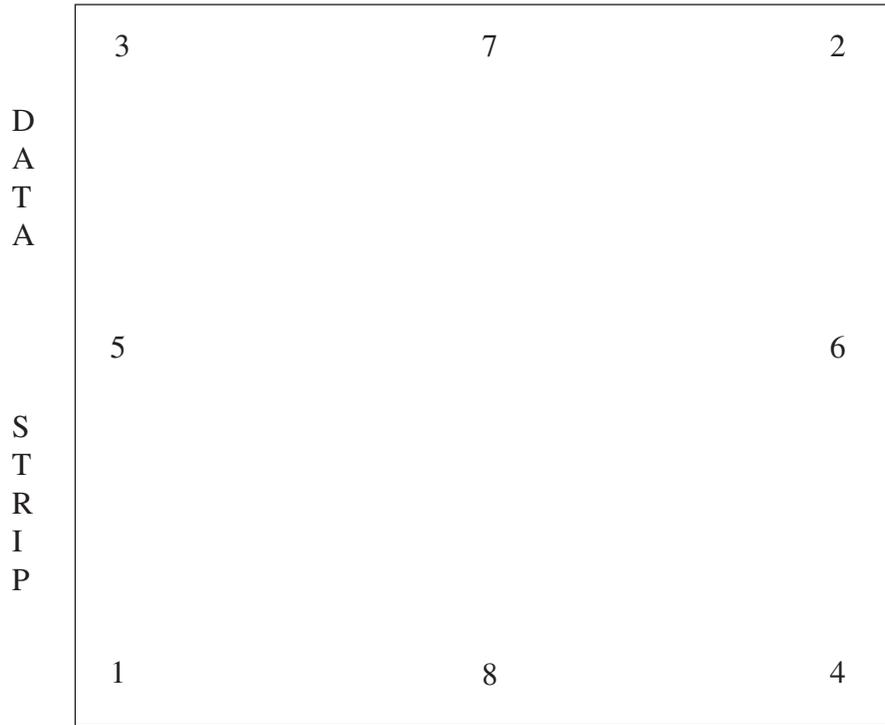

Control Point Placement Guide for Orthorectification of Aerial Photographs.


Control point placement guide for orthorectification of 9" X 9" aerial photographs. Use approximate 1/6th divisions. Requires a minimum of 1 control point in each of the 13 areas. Control points must be as close to the fiducials as is possible.

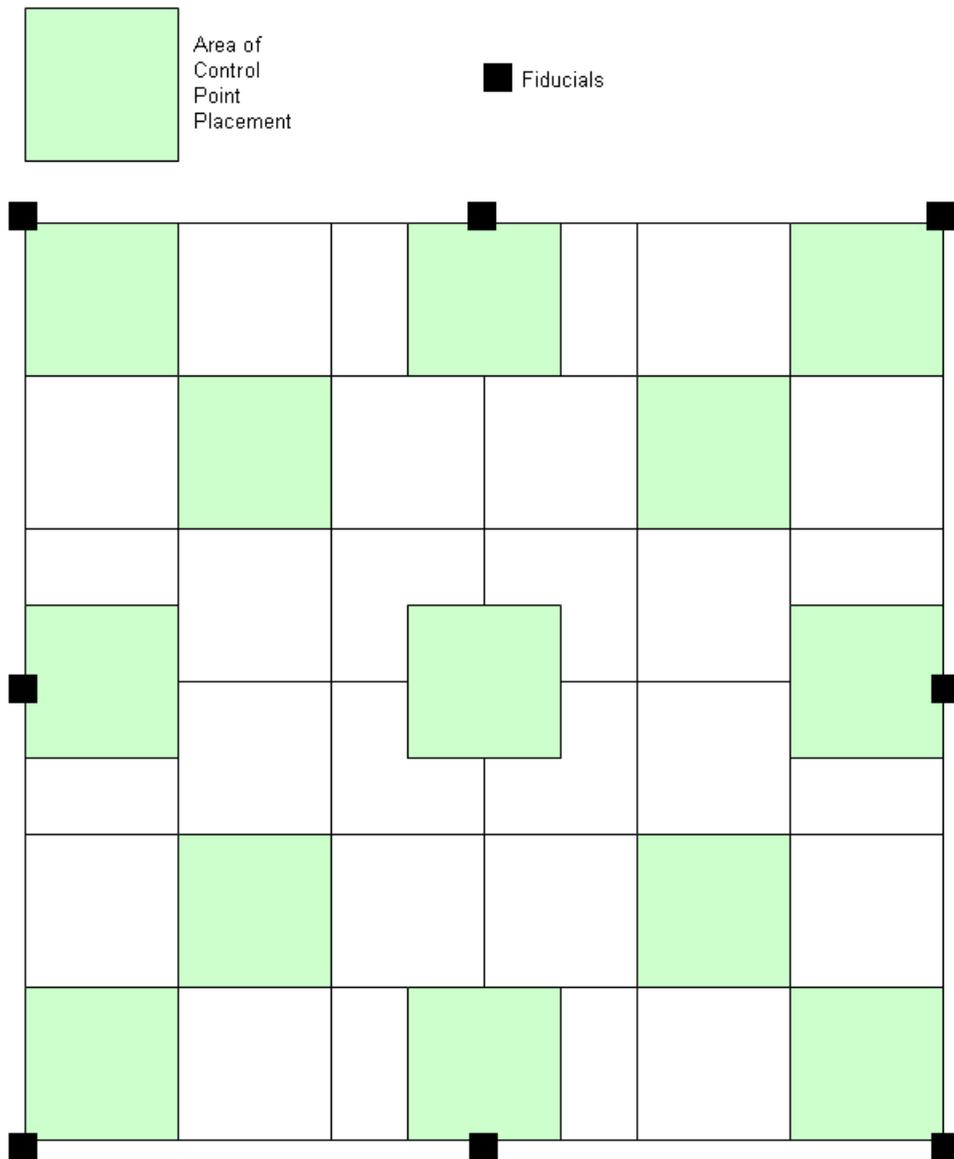

Control Point Placement Guide for Orthorectification of Placement of Tie Points (orange triangles).

Tie points are located in the magenta boxes only if there are adjacent strips of aerial photography (one side or both sides). Tie points in the green boxes tie together adjacent aerial photos along the flight path. Tie points must be located in a line perpendicular to the direction of the airplane's flight path (green boxes) and parallel to adjacent flight paths (magenta boxes). One point must be located in the ends of each box that overlap adjacent aerial photos (two points per box). A tie point is any sharp, well-defined point and is located only on the aerial photo, not on the orthophoto. A tie point can even be the corner edge of a farm field.

NOTE: The data strip is on the left side of the scanned aerial photo, and the airplane flight path was from left to right.

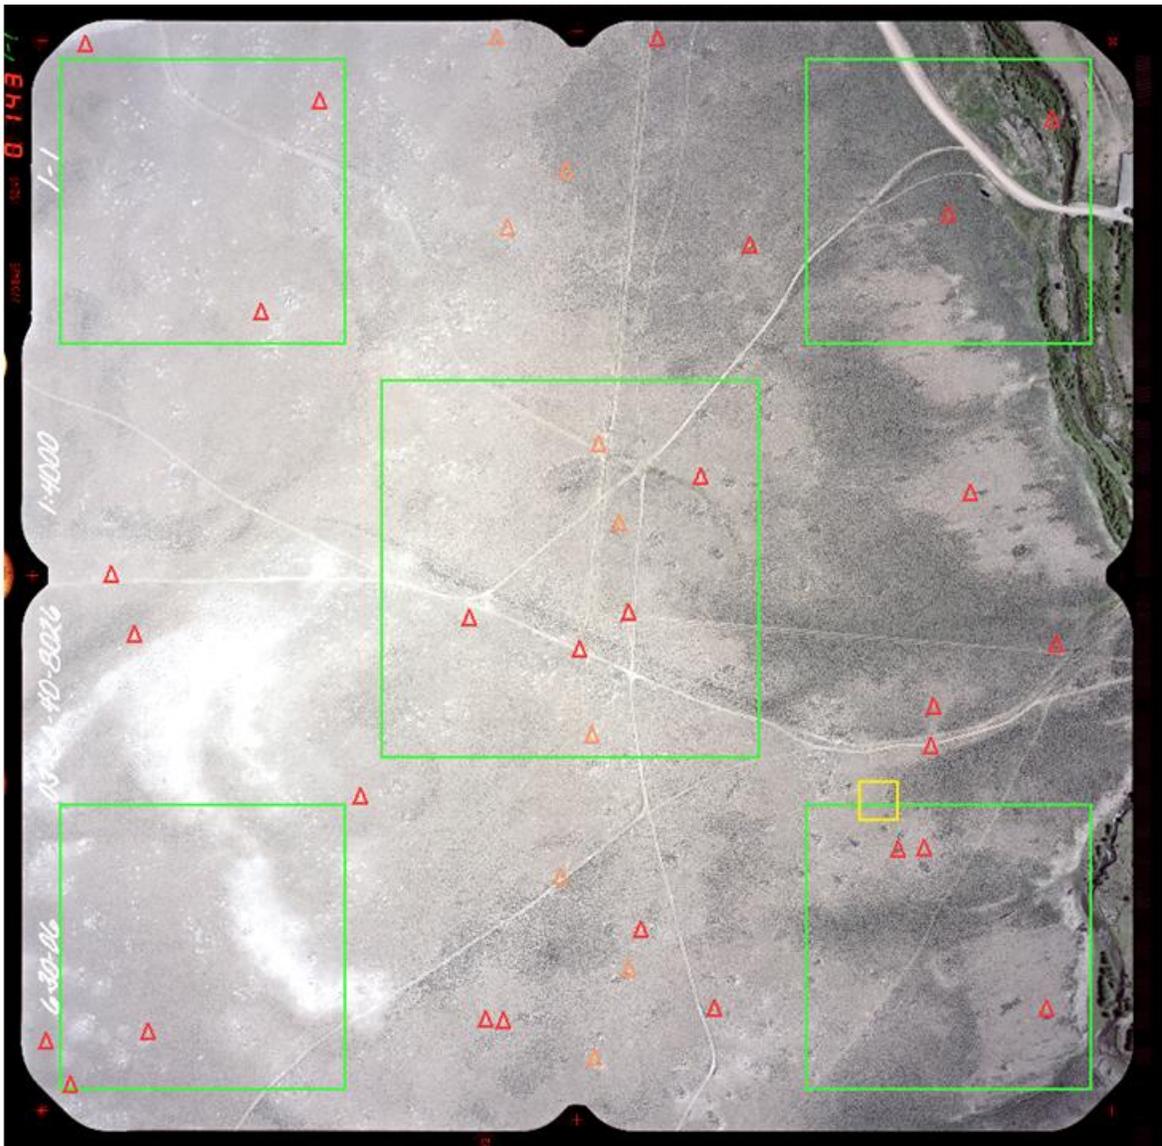

Alternative to SOP for Orthorectification form.

**Digital Data Entry Facility
GIS and Remote Sensing Team
USGS Fort Collins Science Center
February 27, 2007**

Date:

Data Entry Specialist:

Orthorectification Software and Version:

Project:

Aerial photo roll:

Aerial photo exposure:

Reference DOQ source:

Statement of problem:

Why the standard operating procedures should be altered:

The proposed alternative methodology:

Data Entry Specialist: _____ Date: _____

DDEF Manager Approved: _____ Date: _____

Appendix 3. Photo Orthorectification: Bundle Adjustment, Color Balance, Mosaicking

This appendix documents the procedures used in the OrthoMapper software to perform orthorectification, color/tone balancing, and mosaicking for the Mormon Pioneer National Historic Trails Project.

One hundred and sixty-one aerial photographs were required to map the extent of this project. The orthorectification bundle adjustment was performed on groups of aerial photographs resulting in ten “flights” numbered 1, 2, 4-5, 6, 7, 9, 16, 17, 18, and 20. Individual orthorectified aerial photographs were mosaicked into 18 groups. The number of groups were later reduced to 17 (called “sections”) because one group proved to be redundant.

1. Open OrthoMapper, **Project, Open an Existing Project**, and click on **Orientation, Automated Aerotriangulation**.
2. Open the project file (.PJ) for the first image in the selection to be orthorectified and **Open**.
3. Click the **Add Images/Projects** button and add the additional .LAN files to be orthorectified.
4. Enter the **Project Name** without a path (Flight#). The output files will go in the working directory where the files to be orthorectified are stored. Make sure the appropriate DEM(s) is selected and click on **Next**.
5. Enter the number of strips, and the number of images in each strip, even if it is one strip, which it will be for this project. Then click on “Next Strip”.
6. OrthoMapper will transfer the tie points. This will take some time. When it is finished, Notepad will open the file ProjectName_PPOVERLAP.log. This file is not as important as the AutoOrient Log. Open the AutoOrient Log by clicking on the **Display** button next to that name. The AutoOrient Log lists the common Control Points. There must be 6 to 10 points matched along a strip and 3 to 6 points between strips. If there are insufficient control points, it will be necessary to return to the individual image project and add tie points. This appears to be misleading because the points may be present but not associated properly with the overlapping images. In the next step, “Density Points”, the tie points can be associated with the overlapping images.

NOTE: All tie points must be on or very close to the ground level. For example, do not use the top of a sign for a tie point because the relative position of the top of the sign will change with the movement of the airplane as consecutive aerial photographs are acquired.

7. Click on the **Densify Pts** button to adjust tie points to locate them in the same position on each aerial photo where they exist. Move each tie point as necessary to locate it at the same location in each image (work through each aerial photo listed under the heading: **Other images on which point may be located**). After adjusting all images for a given point, click on **Next Point**. Continue until all the necessary tie points have been adjusted. If the tie point on the source image (on left) is moved, the corresponding tie points also must be moved for every image in the list under the heading: **Other images on which point may be located**. After moving a tie point in the source image (on left) the other image probably will have to be adjusted for color by clicking on **Enhance, Linear Stretch LUT**. It may be necessary to adjust both types of tie points: those that are **Out of Range** and those that are **not Out of Range**.

After adjusting each tie point click on **Save Project** because OrthoMapper will lock up and fail after adjusting a number of points. The project being saved is ProjectName.PJ.

8. After the last tie point is adjusted, the windows disappear and the user is returned to the *AutoOrient Examine Dialog Box*. Under the Bundle Adjustment heading **turn off** (no check in a box) **Automatically delete Tie and Control Points that have large residuals**.

Turn on (place a check mark in the box), **Run Initial adjustment without weights**, **Display progress after each adjustment**, and **Create Full Log File**.

Then click **RUN**.

52 Aerial-Photographic Assessment of the Mormon Pioneer National Historic Trail, Fremont County, Wyoming

NOTE: If OrthoMapper locks or exits, click on **Orientation, Bundle Adjustment** and **Open** the project ProjectName.PJ. **DO NOT CLICK ON ORIENTATION, AUTOMATED AEROTRIANGULATION** or it will be necessary to re-adjust all the tie points!!

9. The *Bundle Adjustment Weight Menu* will appear. Adjust **Photo Coordinates Uncertainty** until the ChiSquare Test values (Standard Deviation of Unit Weight) are between The Limits for Test. Enter new values for Uncertainty and click on the **Adjust Parameters** button.

If the SD needs to be increased, decrease the variables.
If the SD needs to be reduced, increase the variables.

When the ChiSquare Test is passed, click on the **Make Orthophoto** button.

10. After clicking on the **Make Orthophoto** button, the *Image/DEM Selection for Orthophoto* window will appear. Turn off all options except turn on **Produce Single Orthophotos from list**. Click **Next**.

11. After clicking **Next** the *Select Output Parameters for Orthophoto* window will appear. Turn on only the options to **Create orthophoto(s) with minimal border pixels** and **Use All Bands**. **DO NOT** turn on Radiometric Correction/Normalize. The color correction and mosaicing are done after the images are subset to remove the outer black border, fiducials, and text on the image (see next step).

Click on **Create Ortho(s)**.

The output TIFF file can only be 4GB in size. If it is larger, a LAN file will be built instead but the LAN file is a modified ERDAS LAN file and cannot be used in ERDAS. Create sections for the output files so that they are smaller than 4GB.

Import the TIFF file into ERDAS Imagine. Use ERDAS Imagine to assign the map projection and datum to the .img file.

12. Use ArcCatalog to assign the map projection (UTM Zone 12 North) and the datum (NAD83) to the imagery.

13. Click on **Trim/Subset/ReSize Image or DEM, Trim Orthophoto before Mosaicking**. A four-corner polygon will appear over the image. Adjust the four corners to eliminate the outer black border, fiducials, and text on the image.

14. If the subset files are large files (Mormon Pioneer National Historic Trails files were 300+ MB), move them to the host PC instead of completing the remaining steps over the network. The color correction in particular may not run over the network. The files to move are FileName_ORTHO_SUB.TIF and FileName_ORTHO_SUB.TFW.

15. Perform the color correction. Click on **Utilities, Correct Image Color/Contrast, Color Balance a Block of Images/Tiles**. The *Color Balance/Blend Menu* will appear. Add the **Image Names** to be color balanced and choose the **Name of the image to standardize the colors**.

Minimum Value to be used during the calculations: 25 for all bands.

Turn On:

Use Brightness of Standardized Image as block average.

Normalize Radiometric Variance.

Include standardized image in normalization process.

Click on the **OK** button.


16. Mosaic the color corrected images. Click on **Utilities/Orthophoto Mosaic Functions/Automatically Create Orthophoto Mosaic**. The *Automatic Mosaic Dialog Box* opens. Add the images to mosaic. **DO NOT** click on Color Balance because this already has been done. Provide an output mosaic file name.

The *Automatic Mosaic Dialog Box* appears with new options. Click on **Do NOT color/tone balance the mosaic**. Click on **OK** to produce the mosaic.

17. ERDAS Imagine was used to convert the TIFF files to the ERDAS Imagine format (.img), projection and datum information was assigned to each output file using ESRI ArcCatalog, and the files then were ready for further processing.

Orthorectified and Mosaicked Product for Flight 1.

Flight 1 is composed of 13 orthorectified aerial photographs.






Example of Level of Detail in the Digital Orthophotos.

Part of Flight 9 digital orthophotos. Note the people walking on a high-trekker-use part of the Mormon Pioneer National Historic Trail. The part shown is part of the one-half-day, 1-day, and 2-day trek routes.



Appendix 4. Delineation of the Trail and Trekker-Use Areas

Mosaicked orthophotos for Flight 1 showing the digitized trail/road arcs (yellow), and the digitized arcs buffered to a distance of 110 meters to define the study area (red).

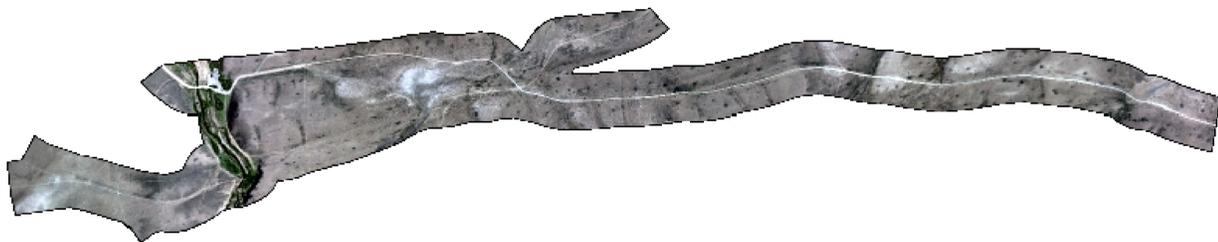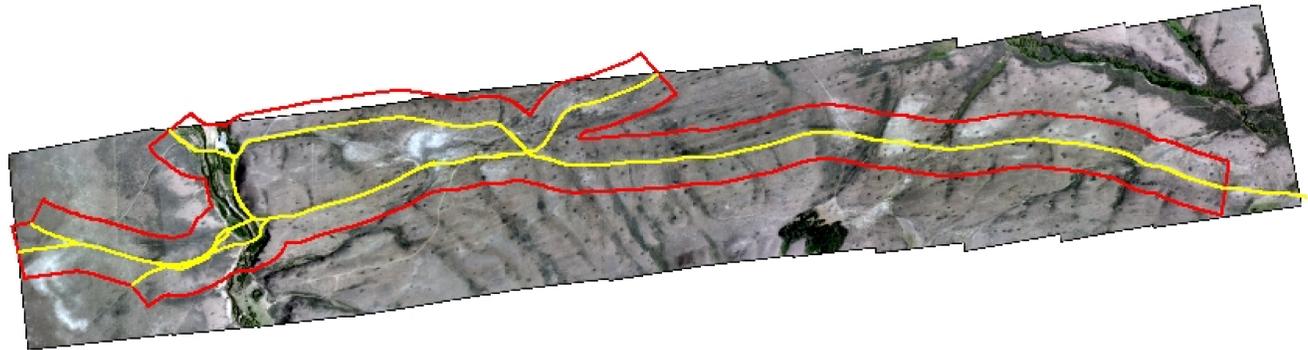

When the digital orthophoto mosaics were completed, the arcs for the Mormon Pioneer National Historic Trail and access roads and trails, were digitized on-screen at a scale of approximately 1:330. The buffered region (top, red) was used to subset the imagery to create the Section1 imagery (below). The Rock Creek parking area is in the upper-left part of the imagery.

The digital GIS data files for the Mormon Pioneer National Historic Trails Project include the following.

Vector Files (ArcInfo Coverages):

Polygon files defining the SECTIONS used in this study

- Section1
- Section2
- Section3a
- Section3b
- Section4
- Section5
- Section6
- Section7
- Section8
- Section9
- Section10
- Section11
- Section12
- Section13a
- Section13b
- Section14
- Section15
- Section16
- Section17

Historic Trail and road data (attributed)

Trlhst330

Historic Trail and road data buffered to 110 meters and divided into the SECTION files listed above

Trlhst330b

Orthorectified Imagery by SECTION (ERDAS Imagine format files)

<i>Orthorectified imagery by SECTION</i>	<i>File Size (MB)</i>
Section1.img	1645
Section2.img	84
Section3a.img	335
Section3b.img	1452
Section4.img	619
Section5.img	538
Section6.img	41
Section7.img	1140
Section8.img	641
Section9.img	1379
Section10.img	686
Section11.img	519
Section12.img	1761
Section13a.img	321
Section13b.img	657
Section14.img	195
Section15.img	378
Section16.img	835
Section17.img	637

Bare-Ground Imagery by SECTION (ERDAS Imagine format files)

<i>Bare-Ground files</i>	<i>File Size (MB)</i>
Section1c60recode.img	549
Section2c60recode.img	28
Section3ac60recode.img	112
Section3bc60recode.img	484
Section4c60recode.img	206
Section5c60recode.img	179
Section6c60recode.img	13
Section7c60recode.img	380
Section8c60recode.img	214
Section9c60recode.img	460
Section10c60recode.img	229
Section11c60recode.img	173
Section12c60recode.img	587
Section13ac60recode.img	107
Section13bc60recode.img	219
Section14c60recode.img	65
Section15c60recode.img	126
Section16c60recode.img	278
Section17c60recode.img	212

NOTE: All digital files are in the Universal Transverse Mercator (UTM) projection, Zone 12 North, using the North American Datum of 1983 (NAD83).

NOTE: ERDAS Imagine format files can be read directly into ArcInfo, ArcGIS, and ArcView.

Appendix 5. Classification of Imagery to Bare-Ground Estimates


The 19 sections of imagery composing the extent of the Mormon Pioneer National Historic Trails for this project were processed in ERDAS Imagine to produce a bare-ground estimate. The Iterative Self-Organizing Data Analysis Technique (ISODATA) was run on each of the 19 sections with the following specifications to produce 60 classes:

Input Raster File (.img):	section#.img
Where # is the section designation	
Output Cluster Layer (.img):	isodata#c60.img
Where c60 indicates ISODATA will produce 60 output classes	
Output Signature Set (.sig):	isodata#c60.sig
Initialize from Statistics:	On
Use Signature Means:	Off
Number of Classes:	60
Initializing Options:	Principal axis Standard deviations = 1
Color Scheme Options:	Approximate true color
Maximum Iterations:	300
Convergence Threshold:	0.99
Skip Factors:	1 X 1
Classify zeros:	Off



The resulting signature files (isodata#c60.sig) were examined, and for each of the 19 sections there were breaks in the signatures that appeared to separate the categories of moderate and high likelihood of bare ground, and a set of classes defined as “all other.”

The signatures created by ISODATA were applied using a Maximum Likelihood classifier to create the same number of classes but refine the spectral classification. The Maximum Likelihood output files (section#c60ml.img) were recoded to create classes of high (value = 1) and moderate (value = 2) likelihood of bare ground, and an “all other” (value = 0) class. The recoded files were exported to the ArcInfo GIRD format for further processing.

Signature Mean Plot based on the imagery for Section 1. The signatures for the three image bands (red, green, blue) are plotted showing the high (red) and moderate (yellow) likelihood of bare ground. The “all other” class signatures are also displayed (black).

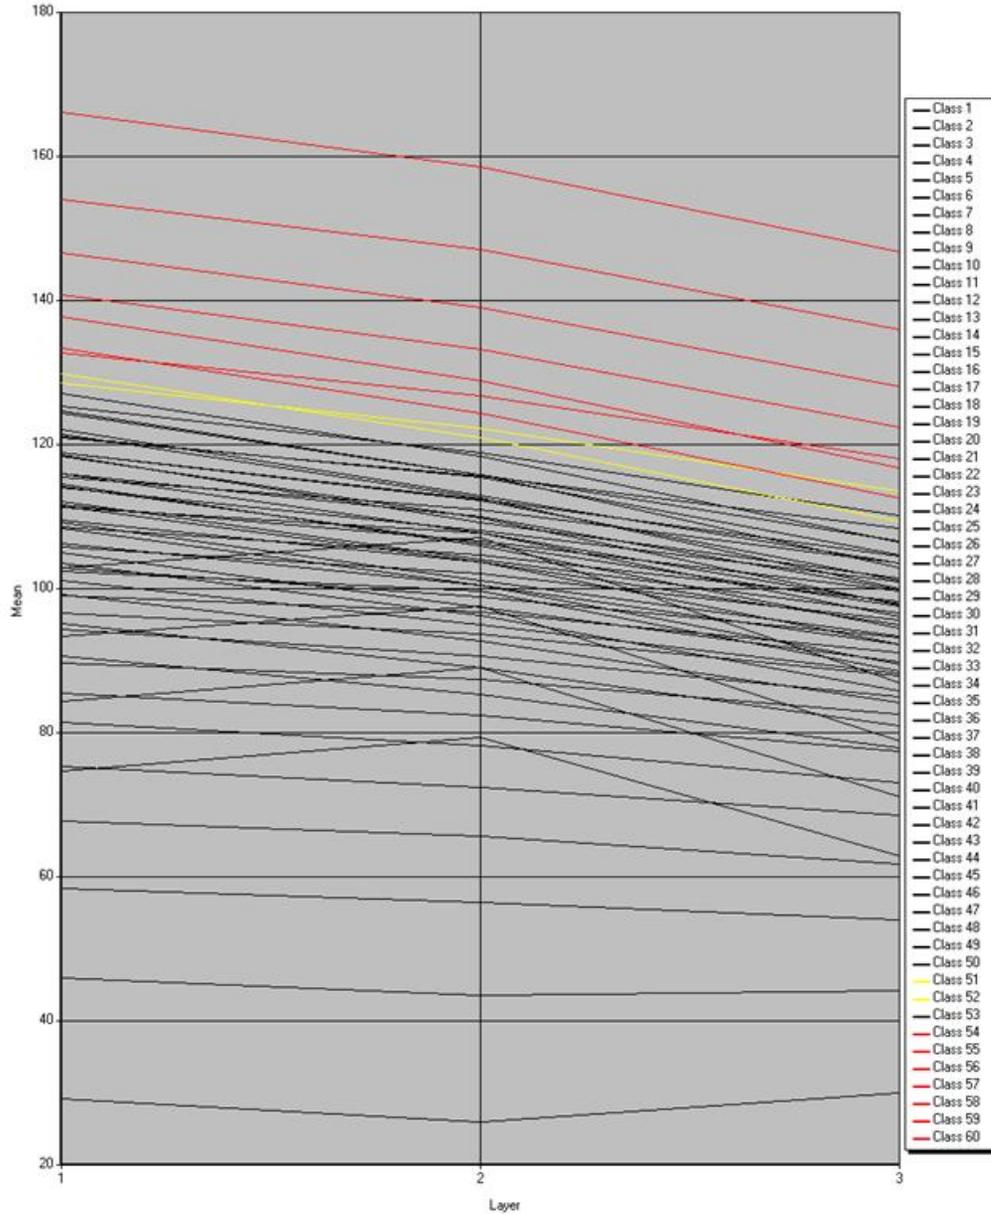

Upper Monument area of the Trail. Orthorectified true-color aerial photography (top panel) and same area showing estimated areas of high (red) and moderate (yellow) likelihood of bare ground (bottom panel)

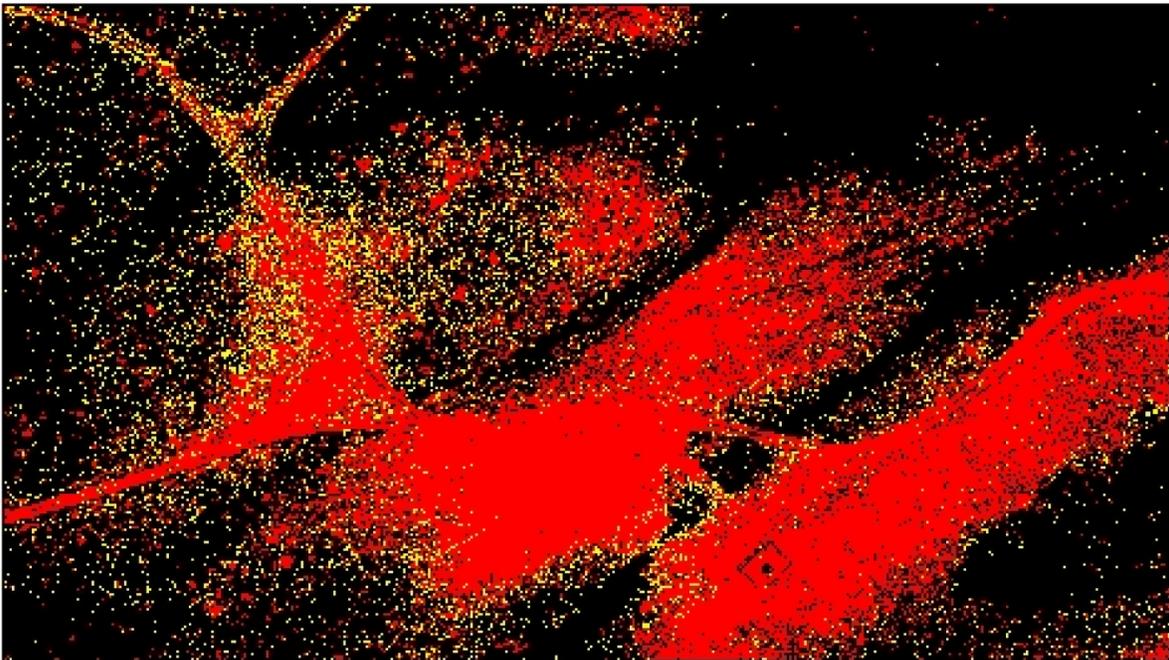

Record of Processing Steps to Create the Bare-Ground Estimates.

Mormon Pioneer National Historic Trails Recode Table
 Bare-Ground Estimate
 Data from June 2006

Input: isodata#c60ml.img Where # is the section number, and "ml" shows the Maximum Likelihood Classifier was applied.

Output: section#c60recode.img Where 60 indicates ISODATA was run with 60 classes.

Section	ISODATA	Maximum likelihood	Recode Class 1 highest likelihood of bare ground	Recode Class 2 lowest likelihood of bare ground	Output file name	Image status
1	isodata1c60.img	section1c60ml.img	54-60	51, 52	section1c60recode.img	OK
2	isodata2c60.img	section2c60ml.img	55-60	52, 54	section2c60recode.img	OK
3a	isodata3ac60.img	section3ac60ml.img	54-60	51, 53	section3ac60recode.img	OK
3b	isodata3bc60.img	section3bc60ml.img	55-60	53-54	section3bc60recode.img	OK
4	isodata4c60.img	section4c60ml.img	55-60	50, 52-54	section4c60recode.img	OK
5	isodata5c60.img	section5c60ml.img	54-60	51 - 53	section5c60recode.img	OK
6	isodata6c60.img	section6c60ml.img	54-60	51, 53	section6c60recode.img	OK
7	isodata7c60.img	section7c60ml.img	51-60	49-50	section7c60recode.img	OK
8	isodata8c60.img	section8c60ml.img	53-60	51-52	section8c60recode.img	OK
9	isodata9c60.img	section9c60ml.img	52-60	49-51	section9c60recode.img	OK
10	isodata10c60.img	section10c60ml.img	50-60	47-49	section10c60recode.img	OK
11	isodata11c60.img	section11c60ml.img	52-53, 55-60	49, 51, 54	section11c60recode.img	OK
12	isodata12c60.img	section12c60ml.img	55-60	53, 54	section12c60recode.img	OK
13a	isodata13ac60.img	section13ac60ml.img	54-60	50-53	section13ac60recode.img	Photo effects
13b	isodata13bc60.img	section13bc60ml.img	55-60	53, 54	section13bc60recode.img	Photo effects
14	isodata14c60.img	section14c60ml.img	55-60	52-54	section14c60recode.img	Photo effects
15	isodata15c60.img	section15c60ml.img	55-60	51-54	section15c60recode.img	OK
16	isodata16c60.img	section16c60ml.img	55, 57-60	54, 56	section16c60recode.img	Photo effects
17	isodata17c60.img	section17c60ml.img	49-60	47, 48	section17c60recode.img	Photo effects
			Value assigned Class 1	Value assigned Class 2	Value assigned background	
			1	2	0	

Photo effects between 6 and 7.

Photo effects between 12 and 13.

Photo effects

Photo effects between 13 and 14.

Photo effects

Photo effects between 14 and 15.

Photo effects

Photo effects between 16 and 17.

Appendix 6. Details of Datasets and Statistical Analyses

Description of ancillary variables considered in models describing the presence of bare soil along the Mormon Pioneer National Historic Trail.

Variable group	Variable name	Variable code	Variable type	Number of categories	Units	Resolution (meters)	Minimum value	Maximum value
<i>Environment- soils</i>								
	percentage of clay	aveclayt	continuous	1	percent	27	0	22.2
	percentage of sand	avesandt	continuous	1	percent	27	0	71.7
	percentage of silt	avesiltt	continuous	1	percent	27	0	39.6
	Soil order	taxord	categorical	7	categories	27	0 (absent)	1 (present)
	Soil taxonomic group	taxclnm	categorical	23	categories	27	0 (absent)	1 (present)
<i>Environment- terrain</i>								
	elevation	elev	continuous	1	meters	27	1,999	2,248
	slope	slope	continuous	1	degrees	27	0	24
	solar radiation-May 15 - Sept 15	solar	continuous	1	wH/m2	27	719,209	831,151
	compound topographic index	cti	continuous	1	index value	27	4.1	23.2
	terrain ruggedness index	tri	continuous	1	index value	27	0	30.5
	topographic position	topo3cls	categorical	4	categories	27	0 (absent)	1 (present)
	slope length factor 1	slf1	continuous	1	index value	27	0	16.7
	slope length factor 2	slf2	continuous	1	index value	27	0	268.9
<i>Trail density</i>								
	10-m radius trail density	ld10a	continuous	1	meters	1	0	78.3
	25-m radius trail density	ld25a	continuous	1	meters	1	0	239
	50-m radius trail density	ld50a	continuous	1	meters	1	0	475.5
	100-m radius trail density	ld100a	continuous	1	meters	1	0	1,075.1
<i>Photo-imagery</i>								
	classification (bare soil) segment	subsec-tion	categorical	17	categories	0.1	0 (absent)	1 (present)

Description of univariate analyses (log-likelihood ratio chi squares ($LR\chi^2$, degrees of freedom (df), p -values, deviance, and rank) of the presence of bare soil on the Mormon Pioneer National Historic Trail (1-meter distance) using ancillary variables.

Variable group	Variable name	$LR\chi^2$	df	p -value	Percentage of deviance explained	Rank within group	Overall rank
<i>Environment- soils</i>							
	percentage of clay	0.97	1	0.325	0.1	5	15
	percentage of sand	13.76	1	<0.001	0.8	3	10
	percentage of silt	7.81	1	0.005	0.5	4	11
	Soil order	59.96	6	<0.001	4.8	2	4
	Soil taxonomic name	184.99	20	<0.001	14.2	1	2
<i>Environment- terrain</i>							
	elevation	46.97	1	<0.001	3.6	1	5
	slope	2.44	1	0.118	0.1	5	14
	solar radiation (May 15 - Sept 15)	29.87	1	<0.001	1.9	2	7
	compound topographic index	0.00	1	0.982	0.0	6	16
	terrain ruggedness index	0.80	1	0.370	0.0	6	16
	topographic position	16.64	3	<0.001	1.1	3	9
	slope length factor 1	4.77	1	0.029	0.3	4	13
	slope length factor 2	0.04	1	0.844	0.0	6	16
<i>Trail density</i>							
	10 meter radius trail density	6.05	1	0.014	0.4	4	12
	25 meter radius trail density	22.27	1	<0.001	1.5	3	8
	50 meter radius trail density	43.35	1	<0.001	3.0	2	6
	100 meter radius trail density	73.88	1	<0.001	5.6	1	3
<i>Photo-imagery</i>							
	classification (bare soil) segment	200.54	16	<0.001	17.9	1	1

Category groupings for soils and subsection of trail (photo-image) to reduce analysis degrees of freedom.

Variable group	Variable name	LR χ^2	df	p-value	Percentage of deviance explained	Rank within group	Overall rank
<i>Environment- soils</i>							
	percentage of clay	0.97	1	0.325	0.1	5	15
	percentage of sand	13.76	1	<0.001	0.8	3	10
	percentage of silt	7.81	1	0.005	0.5	4	11
	Soil order	59.96	6	<0.001	4.8	2	4
	Soil taxonomic name	162.75	4	<0.001	13.0	1	2
<i>Environment- terrain</i>							
	elevation	46.97	1	<0.001	3.6	1	5
	slope	2.44	1	0.118	0.1	5	14
	solar radiation (May 15 - Sept 15)	29.87	1	<0.001	1.9	2	7
	compound topographic index	0.00	1	0.982	0.0	6	16
	terrain ruggedness index	0.80	1	0.370	0.0	6	16
	topographic position	16.64	3	<0.001	1.1	3	9
	slope length factor 1	4.77	1	0.029	0.3	4	13
	slope length factor 2	0.04	1	0.844	0.0	6	16
<i>Trail density</i>							
	10 meter radius trail density	6.05	1	0.014	0.4	4	12
	25 meter radius trail density	22.27	1	<0.001	1.5	3	8
	50 meter radius trail density	43.35	1	<0.001	3.0	2	6
	100 meter radius trail density	73.88	1	<0.001	5.6	1	3
<i>Photo-imagery</i>							
	classification (bare soil) segment	195.73	5	<0.001	17.7	1	1

Identification of the grouping of soil taxonomic classes (categories) for subsequent analyses of bare soil.

Soil number	Soil taxonomic class description	Group 1	Group 2	Group 3	Group 4
3	Coarse-loamy, mixed, superactive Borollic Haplargids-Fine-loamy, mixed, superactive Borollic Natrargids	X			
4	Coarse-loamy, mixed, superactive, calcareous, frigid Ustic Torriorthents-Loamy, mixed, superactive, calcareous, frigid, shallow Ustic Torriorthents		X		
5	Coarse-loamy, mixed, superactive, calcareous, frigid Aquic Ustifluvents-Fine, montmorillonitic Borollic Natrargids	X			
7	Coarse-loamy, mixed, superactive, calcareous, frigid Ustic Torriorthents-Loamy-skeletal, mixed, superactive, calcareous, frigid, shallow Ustic Torriorthents	X			
11	Coarse-loamy, mixed, superactive, frigid Ustic Haplargids-Fine-loamy over sandy or sandy-skeletal, mixed, superactive, frigid Ustic Calciargids			X	
13	Fine-loamy over sandy or sandy-skeletal, mixed, superactive Borollic Haplargids-Loamy-skeletal, mixed, superactive, calcareous, frigid, shallow Ustic Torriorthents			X	
15	Loamy-skeletal, mixed, superactive Lithic Cryoborolls-Loamy-skeletal, mixed, superactive Lithic Cryoborolls	X			
17	Fine-loamy, mixed, superactive Argic Cryoborolls-Loamy-skeletal, mixed, superactive Argic Cryoborolls				X
18	Fine-loamy, mixed, superactive Argic Cryoborolls-Fine-loamy, mixed, superactive Typic Cryoborolls		X		
19	Loamy-skeletal, mixed, superactive Lithic Cryoborolls-Loamy-skeletal, mixed, superactive Typic Cryoborolls				X
20	Fine-loamy, mixed, superactive Borollic Haplargids-Fine-loamy, mixed, superactive, frigid Ustic Haplargids			X	
21	Fine-loamy, mixed, superactive, frigid Ustic Calciargids-Fine-loamy, mixed, superactive, frigid Ustic Calciargids			X	
22	Coarse-loamy, mixed, superactive Typic Cryaquolls-Fine-loamy, mixed, superactive Cumulic Haplocryolls		X		
24	Loamy, mixed, superactive, calcareous, frigid, shallow Ustic Torriorthents-Loamy, mixed, superactive, calcareous, frigid, shallow Ustic Torriorthents	X			
25	Loamy-skeletal, carbonatic, frigid Lithic Calciustepts-Loamy-skeletal, carbonatic, frigid Lithic Calciustepts				X
26	Coarse-loamy, mixed, superactive Cumulic Cryaquolls-Fine-loamy, mixed, superactive Typic Cryoborolls	X			
27	Loamy-skeletal, carbonatic, frigid Aridic Calciustepts-Loamy-skeletal, carbonatic, frigid Lithic Calciustepts				X

Identification of the grouping of soil taxonomic classes (categories) for subsequent analyses of bare soil.—Continued

Soil number	Soil taxonomic class description	Group 1	Group 2	Group 3	Group 4
28	Fine, montmorillonitic Borollic Natrargids-Fine-loamy, mixed, superactive Argic Cryoborolls				X
29	Fine-loamy, mixed, superactive Argic Cryoborolls-Loamy-skeletal, mixed, superactive Argic Lithic Cryoborolls	X			
30	Fine, smectitic, frigid Leptic Torrertic NatrustalFs-Fine-loamy, mixed, superactive, frigid Ustic Haplargids			X	
31	Coarse-loamy, mixed, superactive, calcareous, frigid Aquic Ustifluvents-Fine-loamy, mixed, superactive, calcareous, frigid Aeric Fluvaquents				X

**Identification of the grouping of subsection (photo-imagery) numbers
(categories) for subsequent analyses of bare soil.**

Subsection number	Group 1	Group 2	Group 3	Group 4	Group 5
3a		X			
3b	X				
4	X				
5					X
6					X
7					X
8	X				
9				X	
10	X				
11				X	
12			X		
13a		X			
13b			X		
14				X	
15	X				
16			X		
17					X

Predicted probability of bare ground (equivalent to proportion bare ground) by photo-image and soil group, handcart-use categories, and trail location (m, meters).

Photo-Image*	Soils*	No carts, nonmotorized		No carts, motorized		Low cart use		Moderate cart use		High cart use	
		0 m	1 m	0 m	1 m	0 m	1 m	0 m	1 m	0 m	1 m
1	1	0.351	0.692	0.668	0.948	0.753	0.936	0.659	0.974	0.695	0.959
1	2	0.134	0.075	0.366	0.398	0.467	0.347	0.357	0.575	0.395	0.457
1	3	0.282	0.392	0.594	0.840	0.689	0.808	0.584	0.915	0.623	0.870
1	4	0.377	0.363	0.692	0.822	0.773	0.788	0.683	0.904	0.718	0.855
2	1	0.093	0.326	0.275	0.797	0.365	0.759	0.267	0.889	0.301	0.833
2	2	0.028	0.017	0.098	0.125	0.142	0.102	0.095	0.226	0.110	0.153
2	3	0.069	0.122	0.216	0.530	0.295	0.475	0.209	0.698	0.238	0.590
2	4	0.102	0.109	0.298	0.499	0.391	0.444	0.289	0.671	0.324	0.559
3	1	0.283	0.550	0.595	0.908	0.690	0.888	0.585	0.953	0.624	0.926
3	2	0.102	0.042	0.296	0.265	0.389	0.224	0.288	0.424	0.323	0.314
3	3	0.223	0.260	0.516	0.741	0.618	0.696	0.506	0.854	0.547	0.784
3	4	0.306	0.237	0.621	0.716	0.713	0.669	0.611	0.837	0.650	0.762
4	1	0.391	0.662	0.704	0.941	0.783	0.927	0.696	0.970	0.729	0.953
4	2	0.155	0.067	0.406	0.367	0.509	0.317	0.396	0.542	0.436	0.424
4	3	0.318	0.361	0.634	0.821	0.724	0.786	0.624	0.904	0.662	0.854
4	4	0.417	0.333	0.727	0.802	0.801	0.764	0.719	0.892	0.751	0.837
5	1	0.539	0.736	0.813	0.958	0.868	0.948	0.807	0.979	0.831	0.966
5	2	0.251	0.092	0.555	0.451	0.654	0.397	0.545	0.627	0.586	0.511
5	3	0.460	0.445	0.760	0.867	0.827	0.839	0.752	0.930	0.782	0.892
5	4	0.567	0.414	0.829	0.852	0.880	0.822	0.824	0.922	0.846	0.880

* Photo-image and soil values are grouped categories of similar responses.

Location, size, and percentage of bare ground summarized for all nine concentrated impact areas (locations are given as Universal Transverse Mercator (UTM) coordinates).

ID	Disturbance type	UTM Easting	UTM Northing	Area (meters ²)	Bare ground (percent)
1	portable toilet use, vehicles parking, trampling, livestock	704240.19	4702546.33	1,774.73	29.83
2	portable toilet use, trampling, handcarts pulled off trail	709663.47	4703264.36	3,054.77	33.53
3	vehicles parking, turning around	710361.70	4704045.79	751.44	82.37
4	trampling, dispersal of trekkers	710510.85	4704196.63	2,599.53	66.93
5	trampling, handcarts off trail	710689.25	4704317.95	3,757.79	56.54
6	trampling	711824.33	4704545.80	45.71	27.19
7	trampling	712552.97	4704867.43	466.51	13.89
8	vehicles parking, trampling	712886.39	4705348.47	7,237.29	67.01
9	vehicles parking, portable toilet use, trampling	726718.28	4711223.40	1,496.52	27.76
	Mean			2,353.81	45.01
	Standard deviation			2,205.06	23.56

Publishing support provided by:
Denver Publishing Service Center
Manuscript approved for publication, June 17, 2008
Edited by Mary A. Kidd
Graphics and layout by Sharon Powers

For more information concerning this publication, contact:
Team Chief Scientist, USGS Crustal Imaging and Characterization
Box 25046, Mail Stop 964
Denver, CO 80225
(303) 236-1312

Or visit the Crustal Imaging and Characterization Team Web site at:
<http://crustal.usgs.gov/>

Attachment C- LFO National Historic Trail Monitoring Protocol

Mormon Trail Monitoring Protocol 2007

This form has been developed in order to better serve the needs of management for the Handcart Trekking route along portions of the Historic Mormon. This monitoring system will be used for the 2007 season. After each assessment is completed, the available information will be reviewed for its value to protecting the historic and scenic nature of the NHTs system. The following is a brief description of how the accompanying form should be used in the field to ensure efficiency, accuracy and repeatability.


Site Descriptor

The site descriptor information is used to relocate and organize sites for future monitoring. Date is essential for comparing different locations in the same monitoring session and Data Collector is important in case there are any questions to ask the evaluator in regards to the information collected.

It is important to note what can be seen from the various monitoring locations in order to maintain the most historic scenery possible along the Mormon trail. When filling out the visibility section of the form the data collector must evaluate the entire view shed from the site. It is especially important to scan skylines for non-recreation sites that stand out against the horizon. Non recreational sites would include fence lines, watering tanks, oil and gas developments, etc. Recreational sites would include trail markers, campsites, monuments, etc.


The site narrative should best describe the location on the trail that would help other monitors locate the site without the GPS unit. "Grey rock on the side of the trail" is not an adequate site narrative, but at times may be the best description possible. Narratives should be explicit as possible so with the help of a GPS unit the location can be found. Trail markers, road intersections and large features are good to include in narratives.

Trail Descriptor

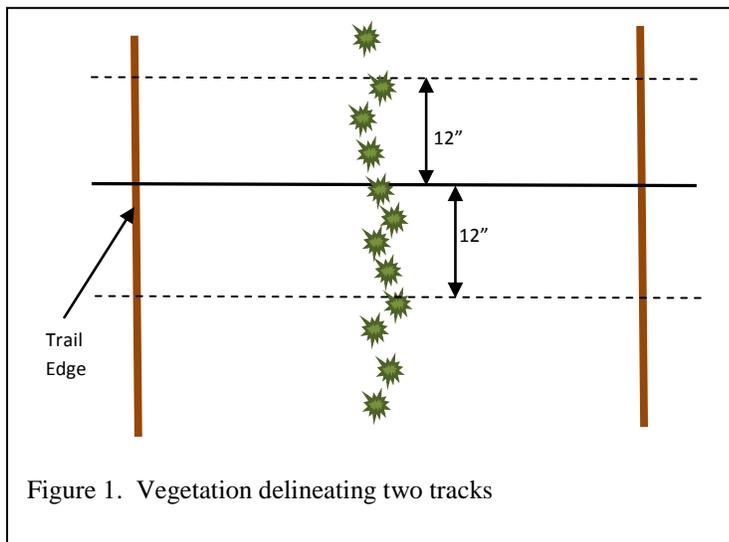


Since user experience on the NHTs system is partially based on trail characteristics it is important to obtain quantitative information about the trail that can be evaluated over both short term and long term time frames. Width, depth, and number of tracks should be noted for every monitoring site.


The number of tracks is based on whether or not, at the site, the trail has two or more defined tracks or is void of vegetation and therefore one wide

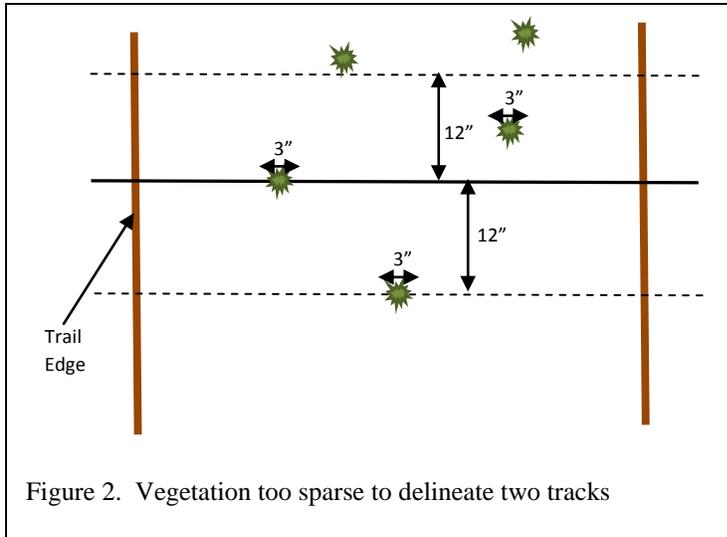

barren track. If there are two evident tracks with sparse vegetation in between this should be recorded as two tracks. A solid linear patch of vegetation will always delineate separate tracks, however, when total width of added patches of vegetation (within 12 inches of the measuring tape) falls below twelve inches the trail is considered one large track (figures 1 and 2). The final determination of one track versus two is up to the individual in the field therefore it is important to familiarize oneself with the trail and make consistent decisions.

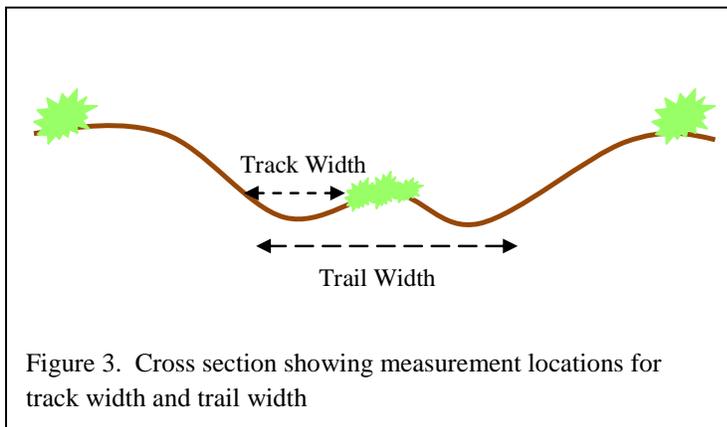

The trail width should be measured perpendicular to the travel of the road and measure the distance where approximately 90% of the use is occurring. A good rule of thumb is to measure the widest distance of barren area along the trail rather than trying to determine how much flattened vegetation is actually getting traveled on or measure the distance between the bottom edges of ruts (figure 3).

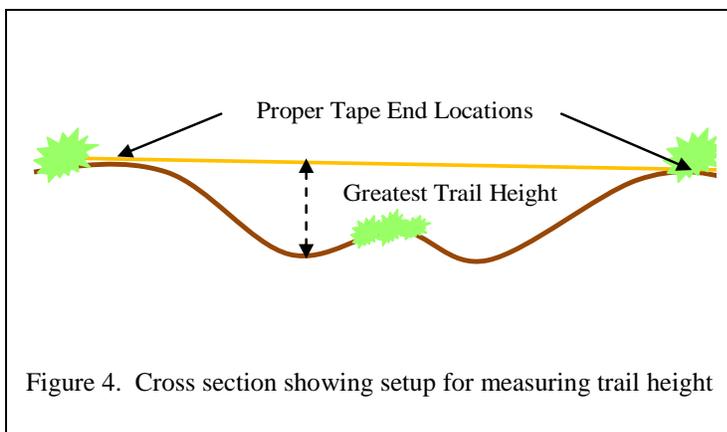

The greatest trail depth should be measured by stringing a tape tightly beyond one side of the trail to the other making sure to include all tracks that are associated with the trail at that location. The tape should be secured on the ground at a level representative of the surface height if a trail did not exist (figure 4). A tape measure or ruler should be used to locate the largest depth of the trail and that value should be recorded.

The total width of trail vegetation should be determined by adding any median vegetation widths located within the bounds of the trail. For example if there are two tracks, the width of trail vegetation would be located between the two tracks. However, if there are three tracks present

there will be two median vegetation widths. These widths should be added together then recorded on the form.

The trail vegetation height is a best estimate to record the average height of vegetation located on the trail median. A number of vegetation heights should be measured and averaged. If the trail is barren, this value will be zero.

Site Impacts

The site impacts are the bulk of the information used for this monitoring system. For the initial inventory site impacts are limited to Yes or No answers. Once the main impacts have been identified, tolerance levels for different variables can be set. If field time indicates other variables should be included in the site impacts, they can be added and evaluated for future trail assessments.

If any of the impacts are present, even in small amounts or a minor occurrence, “yes” should be documented for that impact. The following is a brief description of the variables to be assessed in the site impact section:

- Litter includes recreational trash that trail users would carry with them such as food wrappers, moleskin, lighters, very small broken pieces of handcarts, historic cans, bandanas, etc.
- Trash dumping is considered to be non recreational trash that has been dumped out on or near the trail. Oil cans, lumber, building materials, tires, etc. are considered trash.
- Only record tree damage that is assumed to be human caused. Common tree damages include cutting limbs, engraving names or initials, and tying pack stock to branches.
- Only record shrub damage that is assumed to be human caused. Trampling from grazing cattle is not recreational shrub damage. Shrub damage often occurs on the sides of a trail where people or carts veer off or choose to pull over.
- Rock impacts are quite variable in nature. Common rock impacts include breaking or displacement from overuse, burning from campfires, scratching (initials, graffiti), stacking for cairns, or painted/drawn on to give directions.
- Vandalism impacts are commonly related to shooting, stealing or graffiti. Vandalism includes defacing monuments, shooting signposts, removing medallions, etc. Recreation nodes will most likely be the only places where vandalism is likely to occur, therefore monuments and interpretation sites should be evaluated carefully. Trail sites near cement markers also have potential to be subject to vandalism and should be examined carefully.
- Stream bank impacts are not limited to off trail impacts. When the trail crosses a stream impacts occur and those impacts must be noted if they are located at a monitoring site.

- Off road vehicle/cart impacts are limited to impacts off of the designated trail at the monitoring location. These can include cross country travel, turn around locations, pull offs and areas where groups create new trail in order to travel around difficult sections such as mud or large ruts. Established roads and trails should not be recorded as off road vehicle/cart impacts at a site. These will be recorded in the Off Trail Segment impacts portion of the form.

Site Rating

The initial site rating will be based off of the number of ‘Yes’ answers that are recorded in the impact section. However, the rating scale is flexible and best judgment should be used when selecting a rating. If the rating is not based entirely on the number of ‘Yes’ answers the justification should be noted in the “Comments for Rating” section. Large levels of a single impact criterion such as litter or trash dumping can result in a much more drastic rating than minor levels of multiple criteria.

Impact Descriptors

The section on impact descriptors should be filled out to provide management with information regarding the types of impacts that are being found on the trails. For each impact criteria either select the appropriate descriptor from the list or select other. For ‘other’ descriptors, describe the impact in the ‘Description of Other Impacts’ section.

Off Trail Segment Impacts

The off trail segment impacts should be a tally kept between monitoring site locations. This information is gathered in order to determine an estimate of how much use is occurring off trail along the Mormon Trail. This tally will include locations where the vehicle or cart fully leaves the trail to pull over, turn around, avoid difficult trail sections or initiate cross country travel. This tally will also include all other roads or trails that intersect the Mormon Trail except for the Hudson Atlantic City Road and the Lewiston County Road.

Professional judgment should be used to place off trail impacts into appropriate categories. Recent impacts are considered impacts occurring within the past year. Often times tread marks are still visible and vegetation is still visibly displaced. Past impacts often have vegetation regeneration occurring and no tread is visible in the tracks. Light and heavy ratings relate to the amount of use the impacted area has received. Light use is considered a track that was only used by one or two vehicles or carts. Heavy use relates to tracks that are used or have been used repeatedly by multiple vehicles or carts.

Off Trail Segment Impact Rating

The off trail segment rating is provided as a starting point to get a feel for the amount of use Mormon Trail corridor is receiving via other trails, roads or cross-country travel. As more information is gathered the ratings will be adjusted to better reflect the current and desired off trail use conditions for the trail system. As with the site impact rating, if the quantitative rating

does not seem to be reflective of the actual conditions, a different rating can be given to the trail segment. Any variation in the rating should be justified in the 'comments for rating' section.

Overall Site/Segment Impact Rating

The overall impact rating should be based on the information gathered at the monitoring site, the off trail segment impacts and observations on the trail. If the trail site was not representative of conditions witnessed through trail travel, general conditions should be noted in the comments for rating and an appropriate rating shall be given.

2013 Update

Metal spikes were placed on the right side of the trail at each segment measurement location. This will facilitate consistent location measurements. The pins are located 1-3 feet off of the trail edge. They may be difficult to spot depending on the accuracy of the GPS.

Attachment D- Site Data and Photo Comparison

Site # 1		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	99	99	88	96	97	97	100	77	753	94.125	97
Pre-TTW	Pre-Trek Measure (Inches)	97	98	93	102	96	94	96	77	753	94.125	96
Difference		2	1	-5	-6	1	3	4	0	0	0	1
Median	Post Trek Median (Inches)	97	97	97	97	97	97	97	97			
Post-AVG												
TW	Post-Trek Measure (Inches)	25	26	21	24	24	24	24	19	187	23.375	24
Pre-AVG												
TW	Pre-Trek Measure (Inches)	23.5	17	25	24	24	24	24	19	180.5	22.5625	24
Difference		1.5	9	-4	0	0	0	0	0	6.5	0.8125	0
Median	Post Trek Median (Inches)	24	24	24	24	24	24	24	24	24		
Post-GTD	Post-Trek Measure (Inches)	2.2	3.75	6	6	5	5.5	5.5	5	38.95	4.86875	5.5
Pre-GTD	Pre-Trek Measure (Inches)	2.5	3.25	6	5.5	4.5	4.5	5.5	4	35.75	4.46875	4.5
Difference		-0.3	0.5	0	0.5	0.5	1	0	1	3.2	0.4	1
Median	Post Trek Median (Inches)	5.25	5.25	5.25	5.25	5.25	5.25	5.25	5.25			
Post-TWTV	Post-Trek Measure (Inches)	38	47	46	48	48	48	48	48	371	46.375	48
Pre-TWTV	Pre-Trek Measure (Inches)	48	64	43	48	48	48	48	44	391	48.875	48
Difference		-10	-17	3	0	0	0	0	4	-20	-2.5	0
Median	Post Trek Median (Inches)	48	48	48	48	48	48	48	48			
Post-AHTV	Post-Trek Measure (Inches)	1.2	2.67	4	1	3	1	1	7	20.87	2.60875	1.2
Pre-AHTV	Pre-Trek Measure (Inches)	2	3	4	5	4	3	3	6	30	3.75	3
Difference		-0.8	-0.33	0	-4	-1	-2	-2	1	-9.13	-1.14125	-1.8
Median	Post Trek Median (Inches)	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2			

Site 1: 2014 Photo Comparisons




Preseason Site 1



Postseason Site 1

Site # 2		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Pre-TTW	Pre-Trek Measure (Inches)	99	100	100	96	96	96	89	72	748	93.5	96
Post-TTW	Post-Trek Measure (Inches)	99	111	91	96	96	94	96	74	757	94.625	96
Difference		0	11	-9	0	0	-2	7	2	9	1.125	0
Median	Post Trek Median (Inches)	96	96	96	96	96	96	96	96			
Pre-AVG TW	Pre-Trek Measure (Inches)	96	100	100	100	100	100	100	14	710	88.75	100
Post-AVG TW	Post-Trek Measure (Inches)	45	111	111	111	111	111	111	15	726	90.75	111
Difference		-51	11	11	11	11	11	11	1	16	2	-11
Median	Post Trek Median (Inches)	111	111	111	111	111	111	111	111			
Pre-GTD	Pre-Trek Measure (Inches)	9.6	10.25	10.5	11	11	12	12	11	87.35	10.91875	11
Post-GTD	Post-Trek Measure (Inches)	9.6	9	10	11.5	11	13	12.5	11	87.6	10.95	11
Difference		0	-1.25	-0.5	0.5	0	1	0.5	0	0.25	0.03125	0
Mediam	Post Trek Median (Inches)	11	11	11	11	11	11	11	11			
Pre-TWTV	Pre-Trek Measure (Inches)	3	8	0	0	0	0	0	0	11	1.375	0
Post-TWTV	Post-Trek Measure (Inches)	6	5	0	0	0	0	0	0	11	1.375	0
Difference		3	-3	0	0	0	0	0	0	0	0	0
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			
Pre-AHTV	Pre-Trek Measure (Inches)	2	2	0	0	0	0	0	0	4	0.5	0
Post-AHTV	Post-Trek Measure (Inches)	1.2	3	0	0	0	0	0	0	4.2	0.525	0
Difference		-0.8	1	0	0	0	0	0	0	0.2	0.025	0
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			

Site 2: Total Width of Trail Vegetation (TWTV)

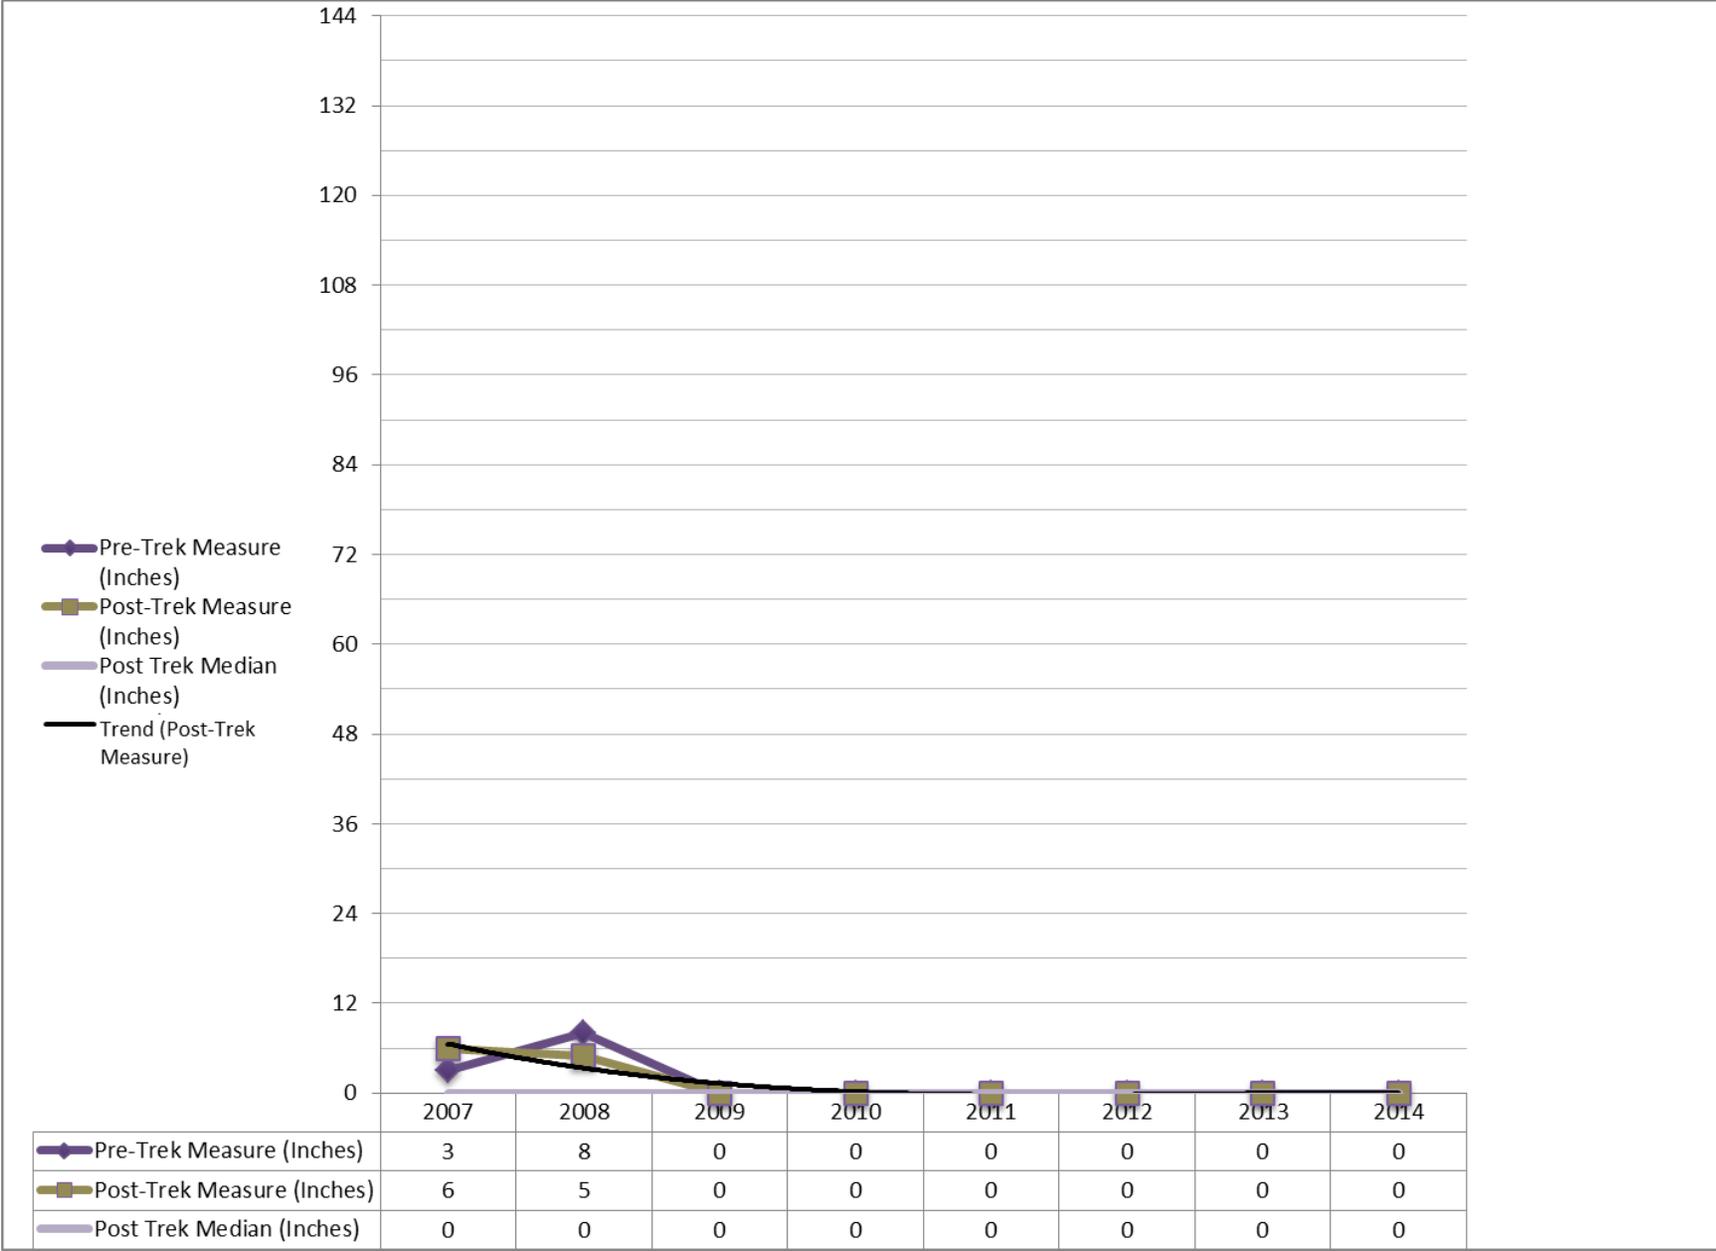

Site 2: 2014 Photo Comparisons



Preseason Site 2



Postseason Site 2

Site # 3		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	93	93	86	88	88	88	88	65	689	86.125	88
Pre-TTW	Pre-Trek Measure (Inches)	89	96	93	89.5	89.25	87	84	65	692.75	86.59375	89.25
Difference		4	-3	-7	-1.5	-1.25	1	4	0	-3.75	-0.46875	-1.25
Median	Post Trek Median (Inches)	88	88	88	88	88	88	88	88			
Post-AVG TW	Post-Trek Measure (Inches)	36.25	31	25	24.5	24.75	24	24	19	208.5	26.0625	24.75
Pre-AVG TW	Pre-Trek Measure (Inches)	22	21	78	23	23.5	24	24	17	232.5	29.0625	23.5
Difference		14.25	10	-53	1.5	1.25	0	0	2	-24	-3	1.25
Median	Post Trek Median (Inches)	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5			
Post-GTD	Post-Trek Measure (Inches)	4.8	3.25	4	4	4.25	3.5	4.5	5	33.3	4.1625	4.25
Pre-GTD	Pre-Trek Measure (Inches)	2.25	4.25	5	5	4.625	4	5	4	34.125	4.265625	4.625
Difference		2.55	-1	-1	-1	-0.375	-0.5	-0.5	1	-0.825	-0.10313	-0.375
Median	Post Trek Median (Inches)	4.25	4.25	4.25	4.25	4.25	4.25	4.25	4.25			
Post-TWTV	Post-Trek Measure (Inches)	16	26	36	42	36.45	36.5	36.4	39	268.35	33.54375	36.45
Pre-TWTV	Pre-Trek Measure (Inches)	44	30	36	36	37.125	46	36.25	38	303.375	37.92188	37.125
Difference		-28	-4	0	6	-0.675	-9.5	0.15	1	-35.025	-4.37813	-0.675
Median	Post Trek Median (Inches)	36.45	36.45	36.45	36.45	36.45	36.45	36.45	36.45			
Post-AHTV	Post-Trek Measure (Inches)	1.2	2	3	3	2.5	1	1	4	17.7	2.2125	2.5
Pre-AHTV	Pre-Trek Measure (Inches)	1	3.25	8	3	3.125	3	3	3.5	27.875	3.484375	3.125
Difference		0.2	-1.25	-5	0	-0.625	-2	-2	0.5	-10.175	-1.27188	-1.625
Median	Post Trek Median (Inches)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5			

Site 3: 2014 Photo Comparisons



Preseason site 3



Postseason site 3

Site # 4		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	84	88	82	87	87	87	88	77	680	85	87
Pre-TTW	Pre-Trek Measure (Inches)	84	89	86	90	86	87	86	76	684	85.5	86
Difference		0	-1	-4	-3	1	0	2	1	-4	-0.5	1
Merdian	Post Trek Median (Inches)	87	87	87	87	87	87	87	87			
Post-AVG												
TW	Post-Trek Measure (Inches)	22.5	24	25	24	24	24	24	19	186.5	23.3125	24
Pre-AVG												
TW	Pre-Trek Measure (Inches)	23.25	19	24	24	23.25	24	12.5	18	168	21	23.25
Difference		-0.75	5	1	0	0.75	0	11.5	1	18.5	2.3125	1.25
Median	Post Trek Median (Inches)	24	24	24	24	24	24	24	24			
Post-GTD	Post-Trek Measure (Inches)	2.5	4	5	4	4	4.5	4.5	4	32.5	4.0625	4
Pre-GTD	Pre-Trek Measure (Inches)	2.75	4.5	5.5	4.25	4.25	5	3	4	33.25	4.15625	4.25
Difference		-0.25	-0.5	-0.5	-0.25	-0.25	-0.5	1.5	0	-0.75	-0.09375	-0.25
Median	Post Trek Median (Inches)	4	4	4	4	4	4	4	4			
Post-TWTV	Post-Trek Measure (Inches)	29	40	38	40	40	36.25	40	44	307.25	38.40625	40
Pre-TWTV	Pre-Trek Measure (Inches)	39	39	43	41	39	36.25	36.5	36	309.75	38.71875	39
Difference		-10	1	-5	-1	1	0	3.5	8	-2.5	-0.3125	1
Median	Post Trek Median (Inches)	40	40	40	40	40	40	40	40			
Post-AHTV	Post-Trek Measure (Inches)	0.6	1.67	2	1	1	1	1	5	13.27	1.65875	1
Pre-AHTV	Pre-Trek Measure (Inches)	1.25	3.8	3	3	3	3	3	3	23.05	2.88125	3
Difference		-0.65	-2.13	-1	-2	-2	-2	-2	2	-9.78	-1.2225	-2
Median	Post Trek Median (Inches)	1	1	1	1	1	1	1	1			

Site 4: 2014 Photo Comparisons



Preseason Site 4



Postseason Site 4

Site # 5		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	100	110	82	79	86	86	94.5	72	709.5	88.6875	86
Pre-TTW	Pre-Trek Measure (Inches)	90	97	96	80	84.5	78	84.5	72	682	85.25	84.5
Difference		10	13	-14	-1	1.5	8	10	0	27.5	3.4375	2.5
	Post Trek Median (Inches)	86	86	86	86	86	86	86	86			
Post-AVG TW	Post-Trek Measure (Inches)	39	28.5	18	17	17	12.5	12.5	12.5	157	19.625	17
Pre-AVG TW	Pre-Trek Measure (Inches)	19	23	33	18	19	12.5	24	12	160.5	20.0625	19
Difference		20	5.5	-15	-1	-2	0	-11.5	0.5	-3.5	-0.4375	-2
	Post Trek Median (Inches)	17	17	17	17	17	17	17	17			
Post-GTD	Post-Trek Measure (Inches)	6	5.5	4.5	4	4	2	4	3	33	4.125	4
Pre-GTD	Pre-Trek Measure (Inches)	1	5.75	5	2.7	3	3	4	2	26.45	3.30625	3
Difference		5	-0.25	-0.5	1.3	1	-1	0	1	6.55	0.81875	1
Median	Post Trek Median (Inches)	4	4	4	4	4	4	4	4			
Post-TWTV	Post-Trek Measure (Inches)	20	27	45	48	45	48	53	36	322	40.25	45
Pre-TWTV	Pre-Trek Measure (Inches)	46	51	34	38	38	42	36.5	36	321.5	40.1875	38
Difference		-26	-24	11	10	7	6	16.5	0	0.5	0.0625	7
Median	Post Trek Median (Inches)	45	45	45	45	45	45	45	45			
Post-AHTV	Post-Trek Measure (Inches)	1	0.125	3	1	1	1	1	4	12.125	1.515625	1
Pre-AHTV	Pre-Trek Measure (Inches)	2.5	3.2	5	3	3	1	3	4	24.7	3.0875	3
Difference		-1.5	-3.075	-2	-2	-2	0	-2	0	-12.575	-1.57188	-2
Median	Post Trek Median (Inches)	1	1	1	1	1	1	1	1			

Site 5: 2014 Photo Comparisons



Preseason Site 5



Postseason Site 5

Site # 6		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	88	98	88	88	88	86	84	77	697	87.125	88
Pre-TTW	Pre-Trek Measure (Inches)	90	94	93	88	88	88	84	84	709	88.625	88
Difference		-2	4	-5	0	0	-2	0	-7	-12	-1.5	0
Median	Post Trek Median (Inches)	88	88	88	88	88	88	88	88			
Post-AVG TW	Post-Trek Measure (Inches)	19	27	24	17	19	12.5	17	19	154.5	19.3125	19
Pre-AVG TW	Pre-Trek Measure (Inches)	21	21	24	20	20	12.5	17	17	152.5	19.0625	20
Difference		-2	6	0	-3	-1	0	0	2	2	0.25	-1
Median	Post Trek Median (Inches)	19	19	19	19	19	19	19	19			
Post-GTD	Post-Trek Measure (Inches)	3	2.5	4.5	5	4	4.5	4	4	31.5	3.9375	4
Pre-GTD	Pre-Trek Measure (Inches)	3.25	6.5	4.5	5.5	5	5	5.5	5	40.25	5.03125	5
Difference		-0.25	-4	0	-0.5	-1	-0.5	-1.5	-1	-8.75	-1.0937	-1
Median	Post Trek Median (Inches)	4	4	4	4	4	4	4	4			
Post-TWTV	Post-Trek Measure (Inches)	36	20	39	48	44	48	48	44	327	40.875	44
Pre-TWTV	Pre-Trek Measure (Inches)	47	52	42	43	48	56	48	48	384	48	48
Difference		-11	-32	-3	5	-4	-8	0	-4	-57	-7.125	-4
Median	Post Trek Median (Inches)	44	44	44	44	44	44	44	44			
Post-AHTV	Post-Trek Measure (Inches)	1	0.958	2	1	1	1	1	6	13.958	1.74475	1
Pre-AHTV	Pre-Trek Measure (Inches)	2.5	3.9	5	3	3	3	3	4	27.4	3.425	3
Difference		-1.5	-2.942	-3	-2	-2	-2	-2	2	-13.442	-1.6802	-2
Median	Post Trek Median (Inches)	1	1	1	1	1	1	1	1			

Site 6: 2014 Photo Comparisons



Preseason Site 6



Postseason Site 6

Site Number	7	year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	84	99	78	88	84	84	84	77	678	84.75	84
Pre-TTW	Pre-Trek Measure (Inches)	87	78	84	79	81.5	78	84.25	84	655.75	81.96875	81.5
Difference		-3	21	-6	9	2.5	6	-0.25	-7	22.25	2.78125	2.5
Median	Post Trek Median (Inches)	84	84	84	84	84	84	84	84			
Post-AVG TW	Post-Trek Measure (Inches)	24	27	18	12	21	12	24	19	157	19.625	21
Pre-AVG TW	Pre-Trek Measure (Inches)	21	14.5	24	12	13.5	12	12.5	17	126.5	15.8125	13.5
Difference		3	12.5	-6	0	7.5	0	11.5	2	30.5	3.8125	7.5
Median	Post Trek Median (Inches)	21	21	21	21	21	21	21	21			
Post-GTD	Post-Trek Measure (Inches)	0.5	1.25	2	1.5	1.75	2	2	4	15	1.875	1.75
Pre-GTD	Pre-Trek Measure (Inches)	0.5	1	2	4	2	2.5	2	1	15	1.875	2
Difference		0	0.25	0	-2.5	-0.25	-0.5	0	3	0	0	-0.25
Median	Post Trek Median (Inches)	1.75	1.75	1.75	1.75	1.75	1.75	1.75	1.75	1.75		
Post-TWTV	Post-Trek Measure (Inches)	19	38	46	53	47	48	48	44	343	42.875	47
Pre-TWTV	Pre-Trek Measure (Inches)	8	47	36	48	47.5	52	48.25	41	327.75	40.96875	47.5
Difference		11	-9	10	5	-0.5	-4	-0.25	3	15.25	1.90625	-0.5
Median	Post Trek Median (Inches)	47	47	47	47	47	47	47	47			
Post-AHTV	Post-Trek Measure (Inches)	0.5	0.375	1	1	1	1	1	6	11.875	1.484375	1
Pre-AHTV	Pre-Trek Measure (Inches)	1.25	3.2	6	3	2.125	1	1	1	18.575	2.321875	2.125
Difference		-0.75	-2.825	-5	-2	-1.125	0	0	5	-6.7	-0.8375	-1.125
Median	Post Trek Median (Inches)	1	1	1	1	1	1	1	1			

Site 7: 2014 Photo Comparisons



Preseason Site 7



Postseason Site 7

Site # 8		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	91	103	84	91	89	88	89	84	719	89.875	89
Pre-TTW	Pre-Trek Measure (Inches)	94	86	87	98	87	87	89	84	712	89	87
Difference		-3	17	-3	-7	2	1	0	0	7	0.875	2
Median	Post Trek Median (Inches)	89	89	89	89	89	89	89	89			
Post-AVG TW	Post-Trek Measure (Inches)	21	20.5	16	52	20.5	21	12.5	17	180.5	22.5625	20.5
Pre-AVG TW	Pre-Trek Measure (Inches)	23	17	21	18	18	18	12.5	17	144.5	18.0625	18
Difference		-2	3.5	-5	34	2.5	3	0	0	36	4.5	2.5
Median	Post Trek Median (Inches)	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5			
Post-GTD	Post-Trek Measure (Inches)	0.1	2.25	4	4	4	3	4.5	4	25.85	3.23125	4
Pre-GTD	Pre-Trek Measure (Inches)	2.75	2.5	2.5	4	4	4	4.5	4	28.25	3.53125	4
Difference		-2.65	-0.25	1.5	0	0	-1	0	0	-2.4	-0.3	0
Median	Post Trek Median (Inches)	4	4	4	4	4	4	4	4			
Post-TWTV	Post-Trek Measure (Inches)	48	62	48	17	48	48	48.25	48	367.25	45.90625	48
Pre-TWTV	Pre-Trek Measure (Inches)	46	52	50	52	50	52	48.25	48	398.25	49.78125	50
Difference		2	10	-2	-35	-2	-4	0	0	-31	-3.875	-2
Median	Post Trek Median (Inches)	48	48	48	48	48	48	48	48			
Post-AHTV	Post-Trek Measure (Inches)	2.4	2.83	4	3	3	1	5	6	27.23	3.40375	3
Pre-AHTV	Pre-Trek Measure (Inches)	3	3.3	4	4	3.3	3	3	4	27.6	3.45	3.3
Difference		-0.6	-0.47	0	-1	-0.3	-2	2	2	-0.37	-0.04625	-0.3
Median	Post Trek Median (Inches)	3	3	3	3	3	3	3	3			

Site 2: 2014 Photo Comparisons




Preseason Site 8



Postseason Site 8

Site # 9		Year										Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014					
Post-TTW	Post-Trek Measure (Inches)	87	92	84	111	104	106	108.25	104	796.25	99.53125	104		
Pre-TTW	Pre-Trek Measure (Inches)	108	91	89	126	108	108	108	101	839	104.875	108		
Difference		-21	1	-5	-15	-4	-2	0.25	3	-42.75	-5.34375	-4		
Median	Post Trek Median (Inches)	104	104	104	104	104	104	104	104					
Post-AVG														
TW	Post-Trek Measure (Inches)	73	92	28	28	28	28	28	36	341	42.625	28		
Pre-AVG TW	Pre-Trek Measure (Inches)	108	91	28	28	36	36	36	38	401	50.125	36		
Difference		-35	1	0	0	-8	-8	-8	-2	-60	-7.5	-8		
Median	Post Trek Median (Inches)	28	28	28	28	28	28	28	28					
Post-GTD	Post-Trek Measure (Inches)	5.5	2	6.5	3	3	1	3	2.5	26.5	3.3125	3		
Pre-GTD	Pre-Trek Measure (Inches)	3	5	5	3.5	3.5	3	4	2	29	3.625	3.5		
Difference		2.5	-3	1.5	-0.5	-0.5	-2	-1	0.5	-2.5	-0.3125	-0.5		
Median	Post Trek Median (Inches)	3	3	3	3	3	3	3	3					
Post-TWTV	Post-Trek Measure (Inches)	0	2	30	0	0	0	0	0	32	4	0		
Pre-TWTV	Pre-Trek Measure (Inches)	0	3	30	0	3	36	36	0	108	13.5	3		
Difference		0	-1	0	0	-3	-36	-36	0	-76	-9.5	-3		
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0	0				
Post-AHTV	Post-Trek Measure (Inches)	0	0.25	4	0	0	0	0	0	4.25	0.53125	0		
Pre-AHTV	Pre-Trek Measure (Inches)	0	0.5	4	0	0.5	3	3	0	11	1.375	0.5		
Difference		0	-0.25	0	0	-0.5	-3	-3	0	-6.75	-0.84375	-0.05		
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0					

Site 9: Total Width of Trail Vegetation (TWTV)

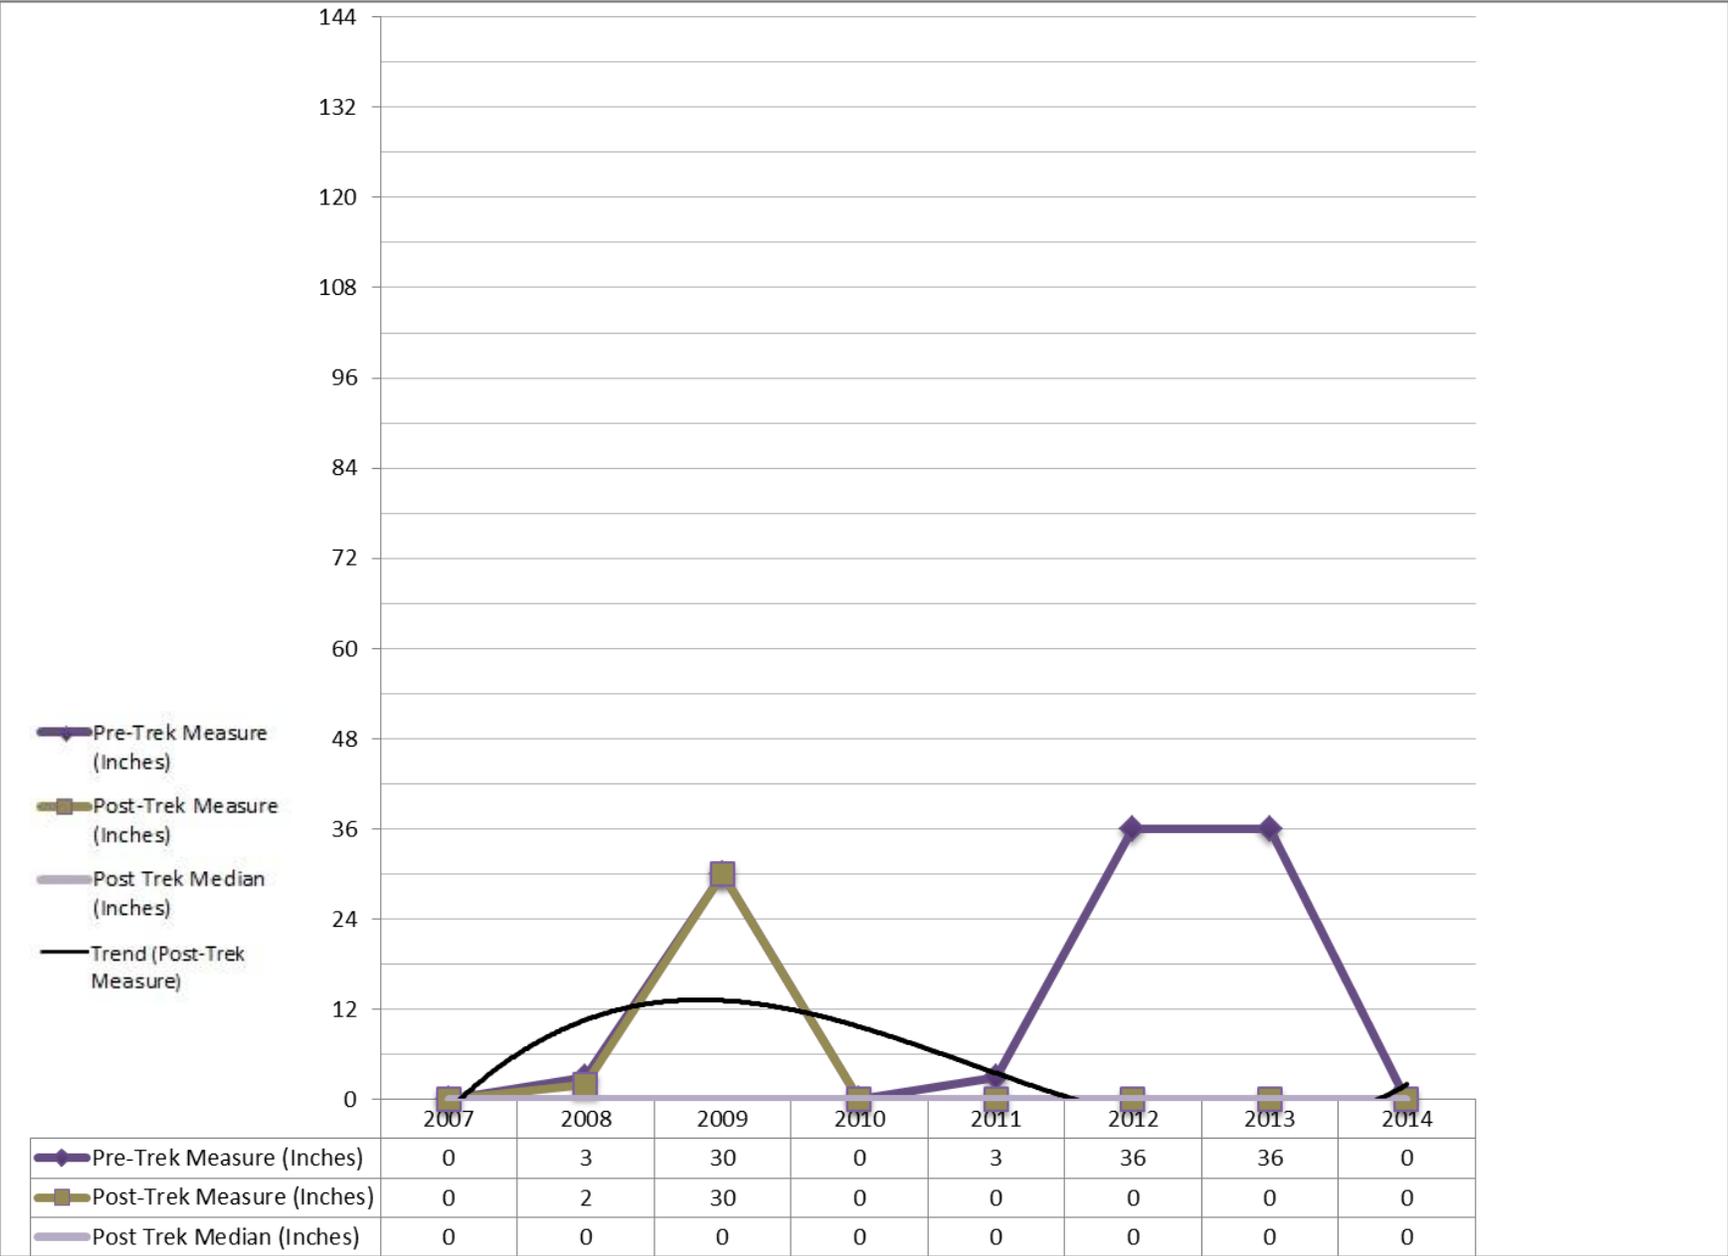

Site 9: 2014 Photo Comparisons



Preseason Site 9



Postseason Site 9

Site # 10		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	80	139	89	90	102	102	132	144	878	109.75	102
Pre-TTW	Pre-Trek Measure (Inches)	124	93	90	66	93	84	132	128	810	101.25	93
Difference		-44	46	-1	24	9	18	0	16	68	8.5	09
Median	Post Trek Median (Inches)	102	102	102	102	102	102	102	102			
Post-AVG TW	Post-Trek Measure (Inches)	24	27	22	54	54	54	54	54	343	42.875	54
Pre-AVG TW	Pre-Trek Measure (Inches)	17	17	28	28	28	28	28	28	202	25.25	28
Difference		7	10	-6	26	26	26	26	26	141	17.625	26
Median	Post Trek Median (Inches)	54	54	54	54	54	54	54	54			
Post-GTD	Post-Trek Measure (Inches)	2	1.75	2	17	2	2	1	1	28.75	3.59375	2
Pre-GTD	Pre-Trek Measure (Inches)	1.5	3	4	17	1.5	1	1	1	30	3.75	1.5
Difference		0.5	-1.25	-2	0	0.5	1	0	0	-1.25	0.15625	1.5
Median	Post Trek Median (Inches)	2	2	2	2	2	2	2	2			
Post-TWTV	Post-Trek Measure (Inches)	42	100	42	12	12	0	0	0	208	26	12
Pre-TWTV	Pre-Trek Measure (Inches)	80	59	36	72	36	0	0	0	283	35.375	36
Difference		-38	41	6	-60	-24	0	0	0	-75	-9.375	-24
Median	Post Trek Median (Inches)	12	12	12	12	12	12	12	12			
Post-AHTV	Post-Trek Measure (Inches)	2.4	0.5	3	1	1	1	1	6	15.9	1.9875	1
Pre-AHTV	Pre-Trek Measure (Inches)	3	2	4	3	3	3	3	1	22	2.75	3
Difference		-0.6	-1.5	-1	-2	-2	-2	-2	5	-6.1	-0.7625	-2
Median	Post Trek Median (Inches)	1	1	1	1	1	1	1	1			

Site 10: 2014 Photo Comparisons



Preseason Site 10



Postseason Site 10

Site # 11

		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	82	101	91	93	91	96	89	90	733	91.625	91
Pre-TTW	Pre-Trek Measure (Inches)	80	91	90	88	89	90	89	89	706	88.25	89
Difference		2	10	1	5	2	6	0	1	27	3.375	2
Median	Post Trek Median (Inches)	91	91	91	91	91	91	91	91			
Post-AVG												
TW	Post-Trek Measure (Inches)	39	33.5	24	26	24	24	24	19	213.5	26.6875	24
Pre-AVG												
TW	Pre-Trek Measure (Inches)	20	24	26	18	24	24	24	19	179	22.375	24
Difference		19	9.5	-2	8	0	0	0	0	34.5	4.3125	0
Median	Post Trek Median (Inches)	24	24	24	24	24	24	24	24			
Post-GTD	Post-Trek Measure (Inches)	0.41	3.5	4.5	6.5	4.5	6.5	7	4.3	37.21	4.65125	4.5
Pre-GTD	Pre-Trek Measure (Inches)	1	4.5	5.5	4.5	4.5	6	5	4.5	35.5	4.4375	4.5
Difference		-										
Median	Post Trek Median (Inches)	0.59	-1	-1	2	0	0.5	2	-0.2	1.71	0.21375	0
Post-TWTV	Post-Trek Measure (Inches)	40	29	44	50	44	51	41	48	347	43.375	44
Pre-TWTV	Pre-Trek Measure (Inches)	44	44	42	48	44	40	41	44	347	43.375	44
Difference		-4	-15	2	2	0	11	0	4	0	0	0
Median	Post Trek Median (Inches)	44	44	44	44	44	44	44	44			
Post-AHTV	Post-Trek Measure (Inches)	1.2	2.75	4	1	1.2	1	1	9	21.15	2.64375	1.2
Pre-AHTV	Pre-Trek Measure (Inches)	3	4.75	5	4	4.75	4	5	8	38.5	4.8125	4.75
Difference		-1.8	-2	-1	-3	-3.55	-3	-4	1	-17.35	-2.1687	-3.55
Median	Post Trek Median (Inches)	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2			

Site 11: 2014 Photo Comparisons



Preseason Site 11



Postseason Site 11

Site # 12

		2007	2008	2009	2010	2011	2012	2013	2014	Total	Average	Median
Post-TTW	Post-Trek Measure (Inches)	99	137	84	88	96	99	89	96	788	98.5	96
Pre-TTW	Pre-Trek Measure (Inches)	96	82	91	84	89	84	89	89	704	88	89
Difference		3	55	-7	4	7	15	0	7	84	10.5	7
Median	Post Trek Median (Inches)	96	96	96	96	96	96	96	96			
Post-AVG												
TW	Post-Trek Measure (Inches)	33	30	14	29	24	24	17	24	195	24.375	24
Pre-AVG												
TW	Pre-Trek Measure (Inches)	22.5	16	19	18	17	17	17	17	143.5	17.9375	17
Difference		10.5	14	-5	11	7	7	0	7	51.5	6.4375	7
Median	Post Trek Median (Inches)	24	24	24	24	24	24	24	24			
Post-GTD												
Post-Trek Measure (Inches)		0.6	2	1.5	1	1.5	1.5	2	1	11.1	1.3875	1.5
Pre-GTD	Pre-Trek Measure (Inches)	1.5	2	2	1.5	2	2.5	2	1	14.5	1.8125	2
Difference		-0.9	0	-0.5	-0.5	-0.5	-1	0	0	-3.4	-0.425	-0.5
Median	Post Trek Median (Inches)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5			
Post-TWTV												
Post-Trek Measure (Inches)		15	72	48	36	48	48	48	40	355	44.375	48
Pre-TWTV	Pre-Trek Measure (Inches)	50	50	50	48	48	48	48	36	378	47.25	48
Difference		-35	22	-2	-12	0	0	0	4	-23	-2.875	0
Median	Post Trek Median (Inches)	48	48	48	48	48	48	48	48			
Post-AHTV												
Post-Trek Measure (Inches)		0.6	0.5	2	1	1	1	1	6	13.1	1.6375	1
Pre-AHTV	Pre-Trek Measure (Inches)	1	4.9	4	3	3	3	1	5	24.9	3.1125	3
Difference		-0.4	-4.4	-2	-2	-2	-2	0	1	-11.8	-1.475	-2
Median	Post Trek Median (Inches)	1	1	1	1	1	1	1	1			

Site 12: 2014 Photo Comparisons



Preseason Site 12



Postseason Site 12

Site # 13

		Year										
		2007	2008	2009	2010	2011	2012	2013	2014	Total	Average	Median
Post-TTW	Post-Trek Measure (Inches)	93	94	85	94	88	88	84	84	710	88.75	88
Pre-TTW	Pre-Trek Measure (Inches)	90	88	88	84	86	86	84.25	84	690.25	86.28125	86
Difference		3	6	-3	10	2	2	-0.25	0	19.75	2.46875	2
Median	Post Trek Median (Inches)	88	88	88	88	88	88	88	88			
Post-AVG												
TW	Post-Trek Measure (Inches)	24.6	21.5	20	17	20	21	12.5	17	153.6	19.2	20
Pre-AVG												
TW	Pre-Trek Measure (Inches)	19.5	25.5	21	17	17	16	12.5	17	145.5	18.1875	17
Difference		5.1	-4	-1	0	3	5	0	0	8.1	1.0125	3
Median	Post Trek Median (Inches)	20	20	20	20	20	20	20	20			
Post-GTD	Post-Trek Measure (Inches)	2.16	2.75	2	4	3	4	4	3	24.91	3.11375	3
Pre-GTD	Pre-Trek Measure (Inches)	3	4	3	3.75	3	3	3.5	3	26.25	3.28125	3
Difference		-0.84	-1.25	-1	0.25	0	1	0.5	0	-1.34	-0.1675	0
Median	Post Trek Median (Inches)	3	3	3	3	3	3	3	3			
Post-TWTV	Post-Trek Measure (Inches)	19	36	43	52	48	48	48	48	342	42.75	48
Pre-TWTV	Pre-Trek Measure (Inches)	18	37	48	48	48	48	48	48.5	343.5	42.9375	48
Difference		1	-1	-5	4	0	0	0	-0.5	-1.5	-0.1875	0
Median	Post Trek Median (Inches)	48	48	48	48	48	48	48	48			
Post-AHTV	Post-Trek Measure (Inches)	0.6	2	2	1	1	1	1	6	14.6	1.825	1
Pre-AHTV	Pre-Trek Measure (Inches)	2.5	2.29	3	4	3	3	3	5	25.79	3.22375	3
Difference		-1.9	-0.29	-1	-3	-2	-2	-2	1	-11.19	-1.39875	-2
Median	Post Trek Median (Inches)	1	1	1	1	1	1	1	1			

Site 13: 2014 Photo Comparisons



Preseason Site 13



Postseason Site 13

Site # 14

		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	104	96	90	89	89	88	84.5	80	720.5	90.0625	89
Pre-TTW	Pre-Trek Measure (Inches)	90	86	94	94	90	91	84	89	718	89.75	90
Difference		14	10	-4	-5	-1	-3	0.5	-9	2.5	0.3125	-3
Medain	Post Trek Median (Inches)	89	89	89	89	89	89	89	89			89
Post-AVG												
TW	Post-Trek Measure (Inches)	29	28	30	24	24	24	24	19	202	25.25	24
Pre-AVG												
TW	Pre-Trek Measure (Inches)	27	21	30	29	24	24	24	17	196	24.5	24
Difference		2	7	0	-5	0	0	0	2	6	0.75	0
Median	Post Trek Median (Inches)	24	24	24	24	24	24	24	24			
Post-GTD	Post-Trek Measure (Inches)	7.68	8.25	9.5	10	9.5	10	10	7.5	72.43	9.05375	9.5
Pre-GTD	Pre-Trek Measure (Inches)	7.5	9	9	10.5	10.5	10.5	10.5	11	78.5	9.8125	10.5
Difference		0.18	-0.75	0.5	-0.5	-1	-0.5	-0.5	-3.5	-6.07	-0.75875	-1
Median	Post Trek Median (Inches)	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5			
Post-TWTV	Post-Trek Measure (Inches)	27.6	29	29	39	29	41	48	0	242.6	30.325	29
Pre-TWTV	Pre-Trek Measure (Inches)	24	30	31	36	30	43	0	0	194	24.25	30
Difference		3.6	-1	-2	3	-1	-2	48	0	48.6	6.075	-1
Median	Post Trek Median (Inches)	29	29	29	29	29	29	29	29			
Post-AHTV	Post-Trek Measure (Inches)	1.1	2.917	1	1	1	1	1	0	9.017	1.127125	1
Pre-AHTV	Pre-Trek Measure (Inches)	4	3	4	3	3	1	1	0	19	2.375	3
Difference		-2.9	-0.083	-3	-2	-2	0	0	0	-9.983	-1.24788	-2
Median	Post Trek Median (Inches)	1	1	1	1	1	1	1	1			

Site 14: 2014 Photo Comparisons



Preseason 14



Postseason 14

Site # 15

		Year										
		2007	2008	2009	2010	2011	2012	2013	2014	Total	Average	Median
Post-TTW	Post-Trek Measure (Inches)	120	184	158	102	109	105	96	109	983	122.875	109
Pre-TTW	Pre-Trek Measure (Inches)	108	132	180	156	132	168	101	108	1085	135.625	132
Difference		12	52	-22	-54	-23	-63	-5	1	-102	-12.75	-23
Median	Post Trek Median (Inches)	109	109	109	109	109	109	109	109			
Post-AVG TW	Post-Trek Measure (Inches)	120	184	184	184	184	184	184	184	1408	176	184
Pre-AVG TW	Pre-Trek Measure (Inches)	108	132	132	132	132	132	132	131	1031	128.875	132
Difference		12	52	52	52	52	52	52	53	377	47.125	52
Median	Post Trek Median (Inches)	184	184	184	184	184	184	184	184			
Post-GTD	Post-Trek Measure (Inches)	19.8	20.25	25	22	22	22	22	22	175.05	21.88125	22
Pre-GTD	Pre-Trek Measure (Inches)	17.5	17.5	17.5	23	21	21	24	23	164.5	20.5625	21
Difference		2.3	2.75	7.5	-1	1	1	-2	-1	10.55	1.31875	1
Median	Post Trek Median (Inches)	22	22	22	22	22	22	22	22			
Post-TWTV	Post-Trek Measure (Inches)	0	14	0	0	0	0	0	0	14	1.75	0
Pre-TWTV	Pre-Trek Measure (Inches)	0	6	0	0	0	0	0	0	6	0.75	0
Difference		0	8	0	0	0	0	0	0	8	1	0
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			
Post-AHTV	Post-Trek Measure (Inches)	0	7.67	0	0	0	0	0	0	7.67	0.95875	0
Pre-AHTV	Pre-Trek Measure (Inches)	0	0.5	0	0	0	0	0	0	0.5	0.0625	0
Difference		0	7.17	0	0	0	0	0	0	7.17	0.89625	0
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			

Site 15: 2014 Photo Comparisons



Preseason Site 15



Postseason Site 15

Site 16: 2014 Photo Comparisons



Preseason site 16



Postseason Site 16

Site 17: 2014 Photo Comparisons




Preseason Site 17



Postseason Site 17

Site 18: Total Width of Trail Vegetation (TWTV)

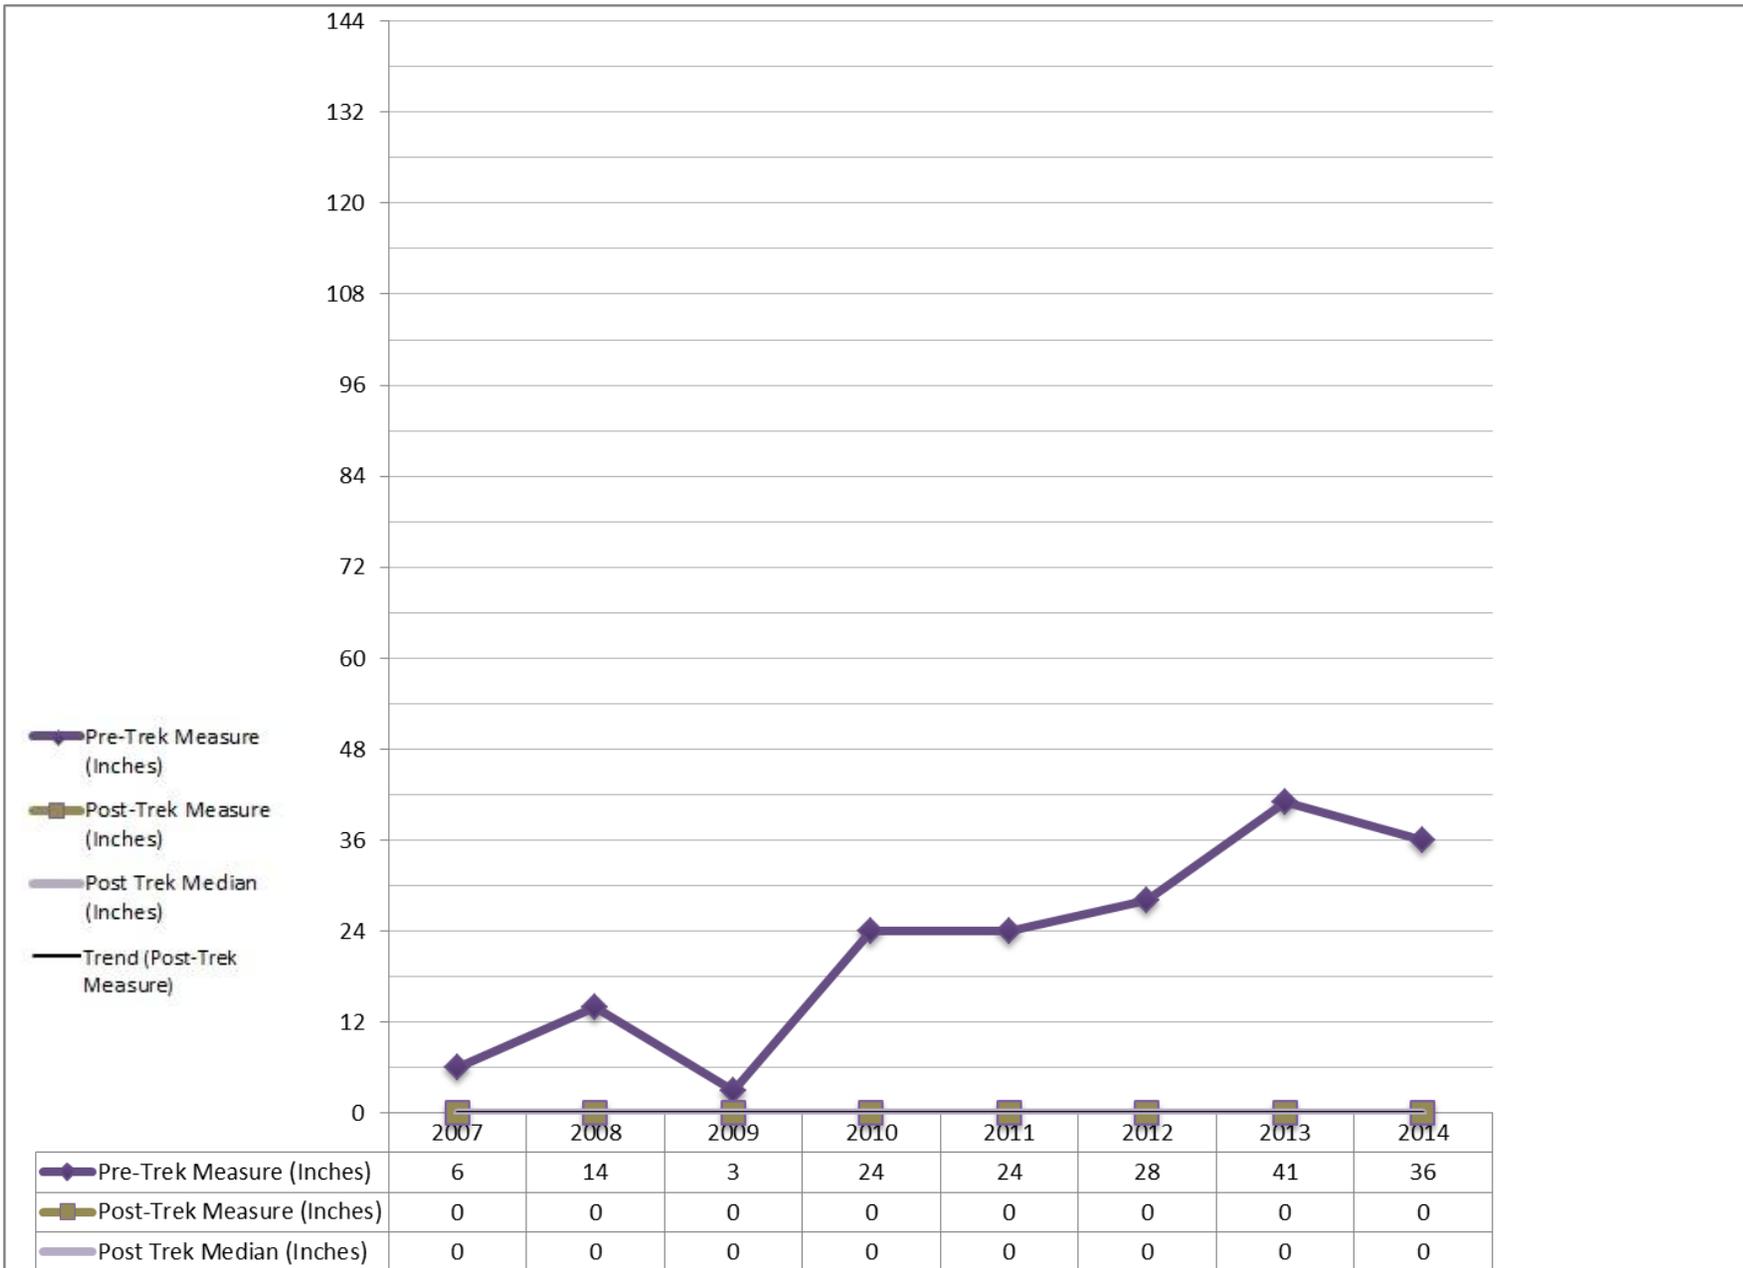

Site 18: 2014 Photo Comparisons



Preseason Site 18



Postseason Site 18

Site #19

		2007	2008	2009	2010	2011	2012	2013	2014	Total	Average	Median
Post-TTW	Post-Trek Measure (Inches)	113	99	102	90	93	93	89	84	763	95.375	93
Pre-TTW	Pre-Trek Measure (Inches)	92	102	106	106	96	96	87	84	769	96.125	96
Difference		21	-3	-4	-16	-3	-3	2	0	-6	-0.75	-3
Median	Post Trek Median (Inches)	93	93	93	93	93	93	93	93			
Post-AVG TW	Post-Trek Measure (Inches)	113	26	48	24.5	26	24.5	24	30	316	39.5	26
Pre-AVG TW	Pre-Trek Measure (Inches)	41	31	34	36	31	24	24.5	29	250.5	31.3125	31
Difference		72	-5	14	-11.5	-5	0.5	-0.5	1	65.5	8.1875	-5
Median	Post Trek Median (Inches)	26	26	26	26	26	26	26	26			
Post-GTD	Post-Trek Measure (Inches)	5.04	3.75	4.5	4.5	4.5	5	3.6	4	34.89	4.36125	4.5
Pre-GTD	Pre-Trek Measure (Inches)	2.5	4	4	4	4	4.5	4	4	31	3.875	4
Difference		2.54	-0.25	0.5	0.5	0.5	0.5	-0.4	0	3.89	0.48625	0.5
Median	Post Trek Median (Inches)	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5			
Post-TWTV	Post-Trek Measure (Inches)	3	47	24	29	29	29	36	72	269	33.625	29
Pre-TWTV	Pre-Trek Measure (Inches)	8	36	11	16	24	34	24	24	177	22.125	24
Difference		-5	11	13	13	5	-5	12	48	92	11.5	5
Median	Post Trek Median (Inches)	29	29	29	29	29	29	29	29			
Post-AHTV	Post-Trek Measure (Inches)	0.48	2	1	1	1	1	1	1	8.48	1.06	1
Pre-AHTV	Pre-Trek Measure (Inches)	0.75	1.8	12	3	2	1	3	2	25.55	3.19375	2
Difference		-0.27	0.2	-11	-2	-1	0	-2	-1	-17.07	-2.1337	-1
Median	Post Trek Median (Inches)	1	1	1	1	1	1	1	1			

Site 19: 2014 Photo Comparisons



Preseason Site 19



Postseason Site 19

Site # 20

		Year										
		2007	2008	2009	2010	2011	2012	2013	2014	Total	Average	Median
Post-TTW	Post-Trek Measure (Inches)	117	129	108	114	112	112	108	108	908	113.5	112
Pre-TTW	Pre-Trek Measure (Inches)	106	130	125	120	113	112	113	108	927	115.875	113
Difference		11	-1	-17	-6	-1	0	5	0	-9	-1.125	-1
Median	Post Trek Median (Inches)	112	112	112	112	112	112	112	112			
Post-AVG												
TW	Post-Trek Measure (Inches)	117	129	129	129	129	130	130	131	1024	128	129
Pre-AVG												
TW	Pre-Trek Measure (Inches)	106	130	130	130	130	130	130	131	1017	127.125	130
Difference		11	-1	-1	-1	-1	0	0	0	7	0.875	-1
Median	Post Trek Median (Inches)	129	129	129	129	129	129	129	129			
Post-GTD	Post-Trek Measure (Inches)	5.52	6.5	5.5	7	6.5	7	7.5	6.5	52.02	6.5025	6.5
Pre-GTD	Pre-Trek Measure (Inches)	5.5	4	7.5	7.25	6.5	6	7	6.5	50.25	6.28125	6.5
Difference		0.02	2.5	-2	-0.25	0	1	0.5	0	1.77	0.22125	0
Median	Post Trek Median (Inches)	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5			
Post-TWTV	Post-Trek Measure (Inches)	0	3	0	0	0	0	0	0	3	0.375	0
Pre-TWTV	Pre-Trek Measure (Inches)	0	0	0	0	0	0	0	0	0	0	0
Difference		0	3	0	0	0	0	0	0	3	0.375	0
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			
Post-AHTV	Post-Trek Measure (Inches)	0	0.5	0	0	0	0	0	0	0.5	0.0625	0
Pre-AHTV	Pre-Trek Measure (Inches)	0	0	0	0	0	0	0	0	0	0	0
Difference		0	0.5	0	0	0	0	0	0	0.5	0.0625	0
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			

Site 20: 2014 Photo Comparisons



Preseason Site 20



Postseason Site 20

Site 21: 2014 Photo Comparisons



Preseason Site 21



Postseason Site 21

Site # 22

		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	96	96	81	88	87	87	72.5	79	686.5	85.8125	87
Pre-TTW	Pre-Trek Measure (Inches)	82	88	87	84	82	81	72.5	77	653.5	81.6875	82
Difference		14	8	-6	4	5	6	0	2	33	4.125	5
Median	Post Trek Median (Inches)	87	87	87	87	87	87	87	87			
Post-AVG TW	Post-Trek Measure (Inches)	36	26	17	17	21	21	12.5	24	174.5	21.8125	21
Pre-AVG TW	Pre-Trek Measure (Inches)	20.5	16.5	22	24	20.5	16	12.5	24	156	19.5	20.5
Difference		15.5	9.5	-5	-7	0.5	5	0	0	18.5	2.3125	1.5
Median	Post Trek Median (Inches)	21	21	21	21	21	21	21	21			
Post-GTD	Post-Trek Measure (Inches)	0.48	1.5	2	1.5	1.5	2	1.5	1	11.48	1.435	1.5
Pre-GTD	Pre-Trek Measure (Inches)	1	0.75	2.5	2.25	1	2.25	0.5	0.5	10.75	1.34375	1
Difference		-0.52	0.75	-0.5	-0.75	0.5	-0.25	1	0.5	0.73	0.09125	0.5
Median	Post Trek Median (Inches)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5			
Post-TWTV	Post-Trek Measure (Inches)	1.25	28	45	48	36.5	36	36.5	48	279.25	34.90625	36.5
Pre-TWTV	Pre-Trek Measure (Inches)	24	42	40	36	42	48	48	48	328	41	42
Difference		-22.75	-14	5	12	-5.5	-12	-11.5	0	-48.75	-6.09375	-5.5
Median	Post Trek Median (Inches)	36.5	36.5	36.5	36.5	36.5	36.5	36.5	36.5			
Post-AHTV	Post-Trek Measure (Inches)	0.24	0.125	1	1	1	1	1	1	6.365	0.795625	1
Pre-AHTV	Pre-Trek Measure (Inches)	0.25	0.25	1	1	1	1	1	1	6.5	0.8125	1
Difference		-0.01	-0.125	0	0	0	0	0	0	-0.135	-0.01688	0
Median	Post Trek Median (Inches)	1	1	1	1	1	1	1	1			

Site 22: 2014 Photo Comparisons



Preseason Site 22



Postseason Site 22

Site # 23

		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	117	96	103	96	96	102	84.5	78	772.5	96.5625	96
Pre-TTW	Pre-Trek Measure (Inches)	105	104	105	101	101	92	84.5	89	781.5	97.6875	101
Difference		12	-8	-2	-5	-5	10	0	-11	-9	-1.125	-5
Median	Post Trek Median (Inches)	96	96	96	96	96	96	96	96			
Post-AVG												
TW	Post-Trek Measure (Inches)	117	96	96	96	96	96	96	24	717	89.625	96
Pre-AVG												
TW	Pre-Trek Measure (Inches)	105	104	104	104	104	104	24	24	673	84.125	104
Difference		12	-8	-8	-8	-8	-8	72	0	44	5.5	-8
Median	Post Trek Median (Inches)	96	96	96	96	96	96	96	96			
Post-GTD	Post-Trek Measure (Inches)	1.92	2.75	4.5	3.75	3	3	2	4	24.92	3.115	3
Pre-GTD	Pre-Trek Measure (Inches)	2	2	4	3	3	3	3	3.5	23.5	2.9375	3
Difference		-										
Medain	Post Trek Median (Inches)	0.08	0.75	0.5	0.75	0	0	-1	0.5	1.42	0.1775	0
Medain	Post Trek Median (Inches)	3	3	3	3	3	3	3	3			
Post-TWTV	Post-Trek Measure (Inches)	0	0	0	0	0	0	0	0	0	0	0
Pre-TWTV	Pre-Trek Measure (Inches)	0	3	0	0	0	0	48	0	51	6.375	0
Difference		0	-3	0	0	0	0	-48	0	-51	-6.375	0
Medain	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			
Post-AHTV	Post-Trek Measure (Inches)	0	0	0	0	0	0	0	0	0	0	0
Pre-AHTV	Pre-Trek Measure (Inches)	0	0.25	0	0	0	0	1	0	1.25	0.15625	0
Difference		0	-0.25	0	0	0	0	-1	0	-1.25	-0.1562	0
Medain	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			

Site 23: 2014 Photo Comparisons



Preseason Site 23



Postseason Site 23


Site # 24

		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	102.96	102	103	92	93	93	84.5	84	754.46	94.3075	97.5
Pre-TTW	Pre-Trek Measure (Inches)	98	96	94	91	92	92	84.5	84	731.5	91.4375	93
Difference		4.96	6	9	1	1	1	0	0	22.96	2.87	4.5
Median	Post Trek Median (Inches)	93	93	93	93	93	93	93	93			
Post-AVG TW	Post-Trek Measure (Inches)	102.96	102	102	102	102	102	24	18	654.96	81.87	102
Pre-AVG TW	Pre-Trek Measure (Inches)	29	46	21	20	20	18	17	17	188	23.5	19.5
Difference		73.96	56	81	82	82	84	7	1	466.96	58.37	82.5
Median	Post Trek Median (Inches)	102	102	102	102	102	102	102	102			
Post-GTD	Post-Trek Measure (Inches)	5.04	4.5	2.5	5.5	5.5	5.5	6	6	40.54	5.0675	5.27
Pre-GTD	Pre-Trek Measure (Inches)	4	6.5	5.75	5.5	5.5	5	6	5.5	43.75	5.46875	5.625
Difference		1.04	-2	-3.25	0	0	0.5	0	0.5	-3.21	-0.4012	-0.355
Median	Post Trek Median (Inches)	5.5	5.5	5.5	5.5	5.5	5.5	5.5	5.5			
Post-TWTV	Post-Trek Measure (Inches)	0	0	0	0	0	0	36	36	72	9	0
Pre-TWTV	Pre-Trek Measure (Inches)	18	6	33	48	48	48	48	0	249	31.125	25.5
Difference		-18	-6	-33	-48	-48	-48	-12	36	-177	-22.125	-25.5
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			
Post-AHTV	Post-Trek Measure (Inches)	0	0	0	0	0	0	1	1	2	0.25	0
Pre-AHTV	Pre-Trek Measure (Inches)	0	1	1	2	1	5	1	0	11	1.375	1
Difference		0	-1	-1	-2	-1	-5	0	1	-9	-1.125	-1
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			

Site 24: 2014 Photo Comparisons



Preseason Site 24

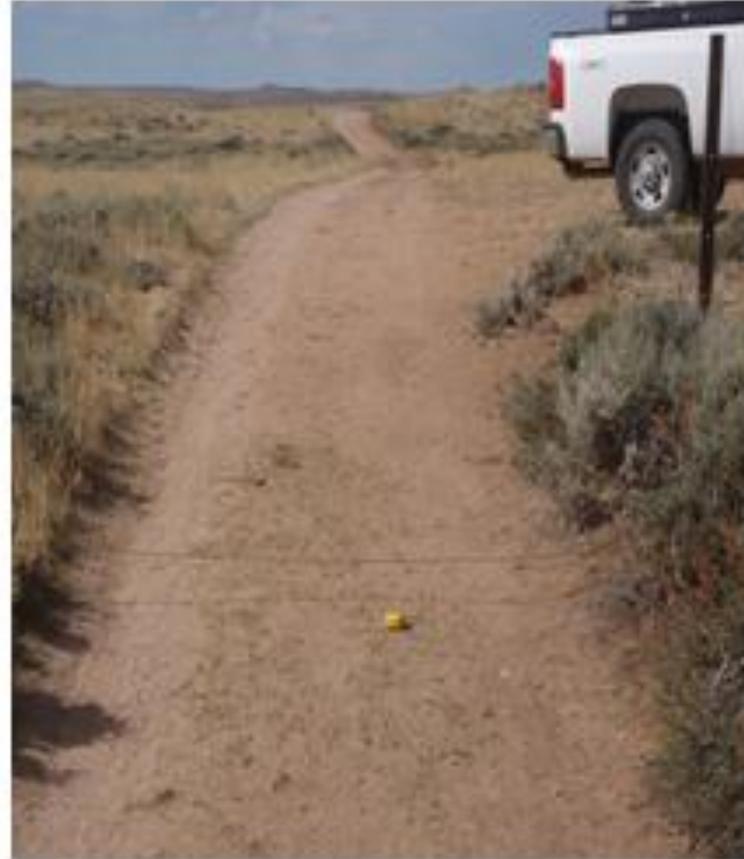


Postseason Site 24

Site # 25

		Year										
		2007	2008	2009	2010	2011	2012	2013	2014	Total	Average	Median
Post-TTW	Post-Trek Measure (Inches)	174	91	103	96	96	93	96	89	838	104.75	96
Pre-TTW	Pre-Trek Measure (Inches)	138	86	173	144	117	93	96	89	936	117	117
Difference		36	5	-70	-48	-21	0	0	0	-98	-12.25	-21
Median	Post Trek Median (Inches)	96	96	96	96	96	96	96	96			
Post-AVG TW	Post-Trek Measure (Inches)	25.5	31	31	29	30	29	24.5	36	236	29.5	30
Pre-AVG TW	Pre-Trek Measure (Inches)	32	18	24	29	29	30	24.5	29	215.5	26.9375	29
Difference		-6.5	13	7	0	1	-1	0	7	20.5	2.5625	1
Median	Post Trek Median (Inches)	30	30	30	30	30	30	30	30			
Post-GTD	Post-Trek Measure (Inches)	3.24	2.125	2.5	5	4.75	5.5	5.5	4.5	33.115	4.139375	4.75
Pre-GTD	Pre-Trek Measure (Inches)	4	4	6	6	5.5	6	5	4	40.5	5.0625	5.5
Difference		-0.76	-1.875	-3.5	-1	-0.75	-0.5	0.5	0.5	-7.385	-0.92313	-0.75
Median	Post Trek Median (Inches)	4.75	4.75	4.75	4.75	4.75	4.75	4.75	4.75			
Post-TWTV	Post-Trek Measure (Inches)	60	33	33	29	31	29	24.25	24	263.25	32.90625	31
Pre-TWTV	Pre-Trek Measure (Inches)	36	84	53	60	44.5	30	36	36	379.5	47.4375	44.5
Difference		24	-51	-20	-31	-13.5	-1	-11.75	-12	-116.25	-14.5313	-13.5
Median	Post Trek Median (Inches)	31	31	31	31	31	31	31	31			
Post-AHTV	Post-Trek Measure (Inches)	0.6	1.167	0	3	2.0835	3	1	3	13.8505	1.731313	2.0835
Pre-AHTV	Pre-Trek Measure (Inches)	2	2.5	3	3	3	3	3	4	23.5	2.9375	3
Difference		-1.4	-1.333	-3	0	-0.9165	0	-2	-1	-9.6495	-1.20619	-0.9165
Median	Post Trek Median (Inches)	2.0835	2.0835	2.0835	2.0835	2.0835	2.0835	2.0835	2.0835			

Site 25: Total Width of Trail Vegetation (TWTV)

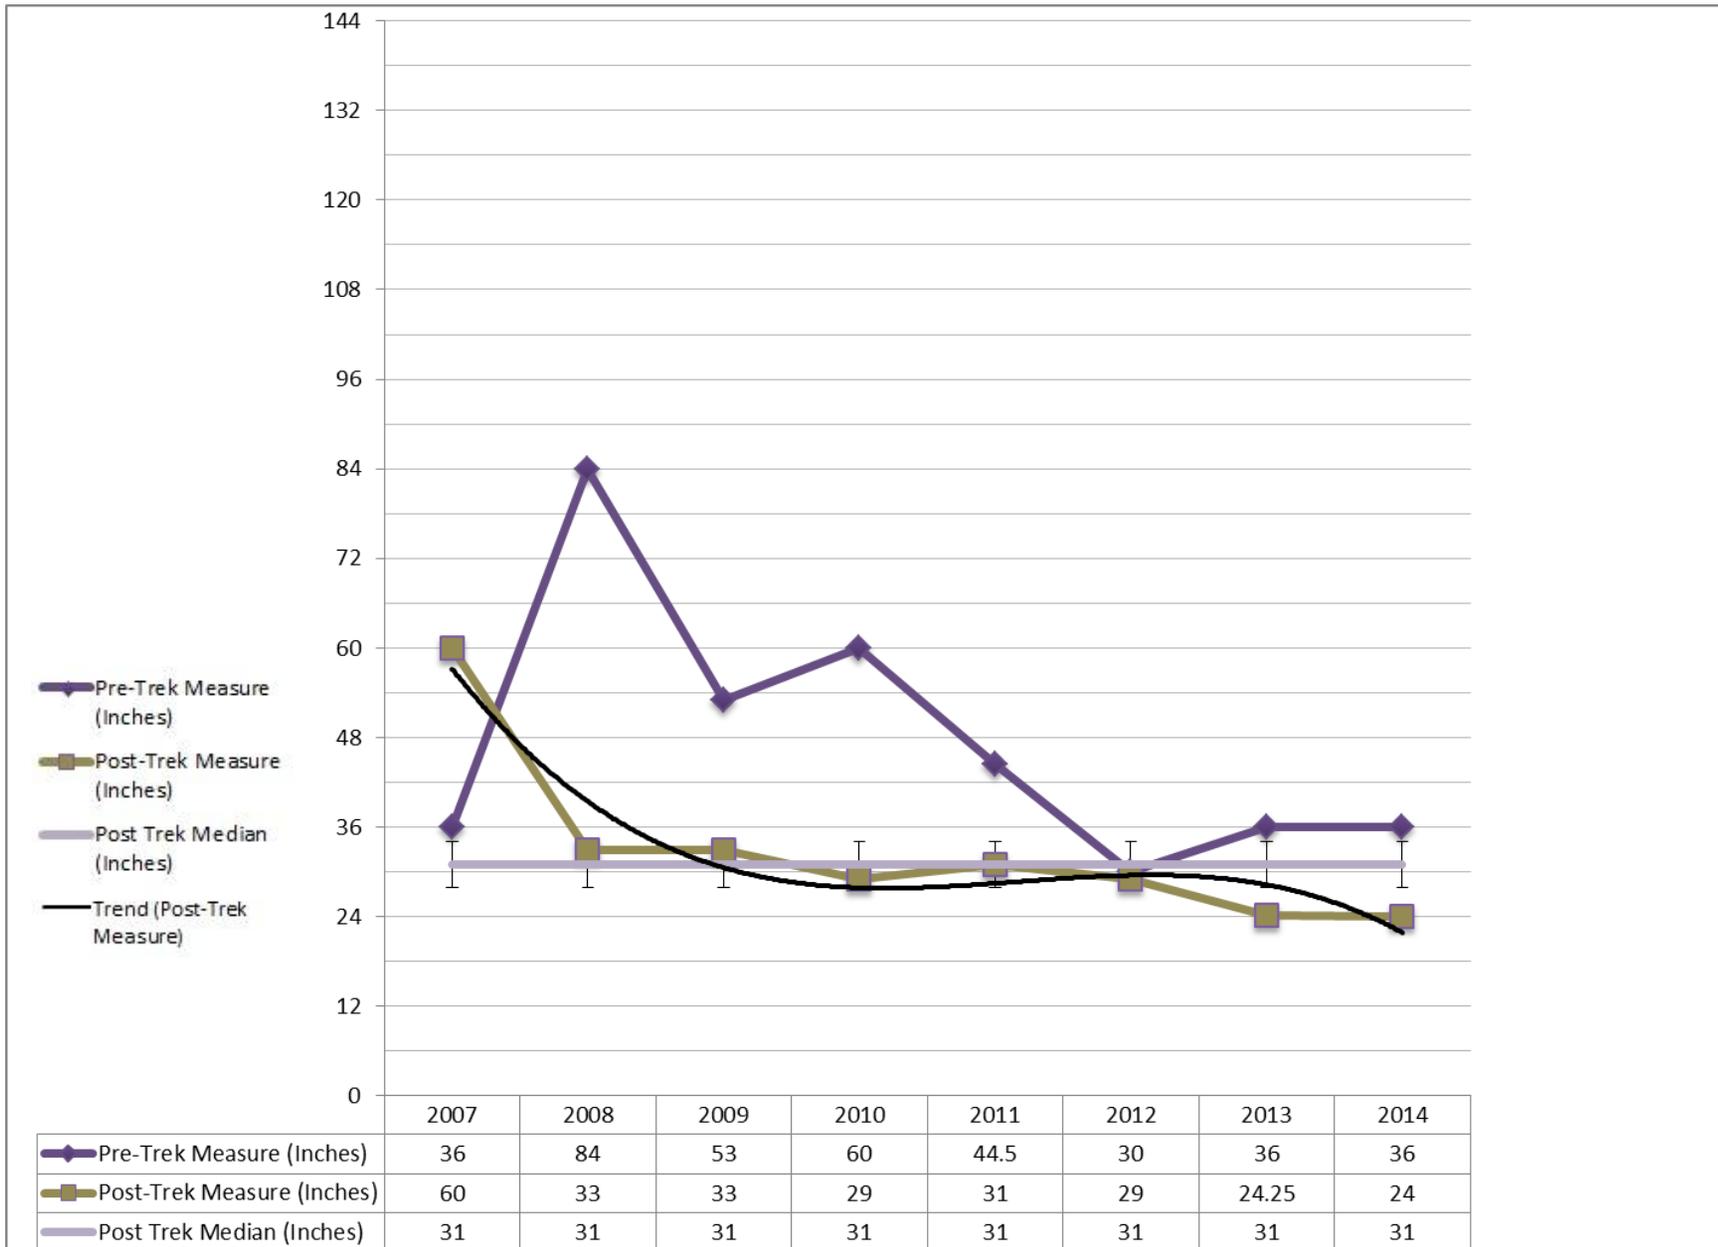

Site 25: 2014 Photo Comparisons



Preseason Site 25



Postseason Site 25

Site # 26

		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	101	122	142	105	108	108	101	112	899	112.375	108
Pre-TTW	Pre-Trek Measure (Inches)	106	114	199	102	108	112	108	108	957	119.625	108
Difference		-5	8	-57	3	0	-4	-7	4	-58	-7.25	0
Median	Post Trek Median (Inches)	108	108	108	108	108	108	108	108			
Post-AVG TW	Post-Trek Measure (Inches)	8.5	47	47	29	29	29	29	84	302.5	37.8125	29
Pre-AVG TW	Pre-Trek Measure (Inches)	36	36	36	36	36	18	24.5	12	234.5	29.3125	36
Difference		-27.5	11	11	-7	-7	11	4.5	72	68	8.5	7
Median	Post Trek Median (Inches)	29	29	29	29	29	29	29	29			
Post-GTD	Post-Trek Measure (Inches)	1.8	2	9	3	3	3	1	4	26.8	3.35	3
Pre-GTD	Pre-Trek Measure (Inches)	2.5	2.5	5	3.25	3	3	3	3	25.25	3.15625	3
Difference		-0.7	-0.5	4	-0.25	0	0	-2	1	1.55	0.19375	0
Median	Post Trek Median (Inches)	3	3	3	3	3	3	3	3			
Post-TWTV	Post-Trek Measure (Inches)	6	19	0	36	0	0	0	0	61	7.625	0
Pre-TWTV	Pre-Trek Measure (Inches)	22	18	0	0	18	48	48	0	154	19.25	18
Difference		-16	1	0	36	-18	-48	-48	0	-93	-11.625	-18
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			
Post-AHTV	Post-Trek Measure (Inches)	0.24	0.25	0	1	0	0	0	0	1.49	0.18625	0
Pre-AHTV	Pre-Trek Measure (Inches)	1	0.75	0	0	0.75	3	1	0	6.5	0.8125	0.75
Difference		-0.76	-0.5	0	1	-0.75	-3	-1	0	-5.01	-0.6262	-0.75
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			

Site 26: 2014 Photo Comparisons



Preseason Site 26



Postseason Site 26

Site # 27

		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	120	92	120	93	93	93	89	96	796	99.5	93
Pre-TTW	Pre-Trek Measure (Inches)	118	120	132	92	96	90	89	96	833	104.125	96
Difference		2	-28	-12	1	-3	3	0	0	-37	-4.625	-3
Median	Post Trek Median (Inches)	93	93	93	93	93	93	93	93			
Post-AVG												
TW	Post-Trek Measure (Inches)	22.44	24.3	21	26	24	24	24	24	189.74	23.7175	24
Pre-AVG												
TW	Pre-Trek Measure (Inches)	20	22	24	24	24	24	24	24	186	23.25	24
Difference		2.44	2.3	-3	2	0	0	0	0	3.74	0.4675	0
Median	Post Trek Median (Inches)	24	24	24	24	24	24	24	24			
Post-GTD	Post-Trek Measure (Inches)	5.52	4.25	10.25	7.5	6	7	3.25	6	49.77	6.22125	6
Pre-GTD	Pre-Trek Measure (Inches)	5.5	8.5	9	7.75	7.75	8.5	7.5	6	60.5	7.5625	7.75
Difference		0.02	-4.25	1.25	-0.25	-1.75	-1.5	-4.25	0	-10.73	-1.3412	-1.75
Median	Post Trek Median (Inches)	6	6	6	6	6	6	6	6			
Post-TWTV	Post-Trek Measure (Inches)	30	24	56	36	36	36	96.5	36	350.5	43.8125	36
Pre-TWTV	Pre-Trek Measure (Inches)	38	32	30	40	36.5	38	36.5	10	261	32.625	36.5
Difference		-8	-8	26	-4	-0.5	-2	60	26	89.5	11.1875	-0.5
Median	Post Trek Median (Inches)	36	36	36	36	36	36	36	36			
Post-AHTV	Post-Trek Measure (Inches)	0.6	1.3	4	3	1.3	1	1	3	15.2	1.9	1.3
Pre-AHTV	Pre-Trek Measure (Inches)	1.5	2.5	4	3	3	3	3	4	24	3	3
Difference		-0.9	-1.2	0	0	-1.7	-2	-2	-1	-8.8	-1.1	-2.7
Medain	Post Trek Median (Inches)	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3			

Site 27: 2014 Photo Comparisons




Preseason Site 28



Postseason Site 28

Site # 28		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	96	94	84	94	96	101	101	99	765	95.625	96
Pre-TTW	Pre-Trek Measure (Inches)	108	99	132	108	102	102	101	98	850	106.25	102
Difference		-12	-5	-48	-14	-6	-1	0	1	-85	-10.625	-5
Median	Post Trek Median (Inches)	96	96	96	96	96	96	96	96			
Post-AVG TW	Post-Trek Measure (Inches)	34.8	26.5	25	24.25	26.5	89	24.5	30	280.55	35.06875	26.5
Pre-AVG TW	Pre-Trek Measure (Inches)	42	36	35	36	36	24	24.5	36	269.5	33.6875	36
Difference		-7.2	-9.5	-10	-11.75	-9.5	65	0	-6	11.05	1.38125	-9.5
Median	Post Trek Median (Inches)	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5			
Post-GTD	Post-Trek Measure (Inches)	0.432	1.75	3.5	7	6.5	6.5	7	13.5	46.182	5.77275	6.5
Pre-GTD	Pre-Trek Measure (Inches)	7	5	8	7.5	7	5.5	6	7	53	6.625	7
Difference		-	-	-	-	-	-	-	-	-	-	-
Difference		6.568	-3.25	-4.5	-0.5	-0.5	1	1	6.5	-6.818	-0.85225	-0.5
Median	Post Trek Median (Inches)	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5			
Post-TWTV	Post-Trek Measure (Inches)	18	31	26	36	31	36	36	24	238	29.75	31
Pre-TWTV	Pre-Trek Measure (Inches)	12	24	0	24	24	36	36	24	180	22.5	24
Difference		6	7	26	12	7	0	0	0	58	7.25	7
Median	Post Trek Median (Inches)	31	31	31	31	31	31	31	31			
Post-AHTV	Post-Trek Measure (Inches)	0.24	0.67	1	1	1	1	1	1	6.91	0.86375	1
Pre-AHTV	Pre-Trek Measure (Inches)	0.5	0.25	0	1	1	3	1	1	7.75	0.96875	1
Difference		-0.26	0.42	1	0	0	-2	0	0	-0.84	-0.105	0
Median	Post Trek Median (Inches)	1	1	1	1	1	1	1	1			

Site 28: Total Trail Width (TTW)

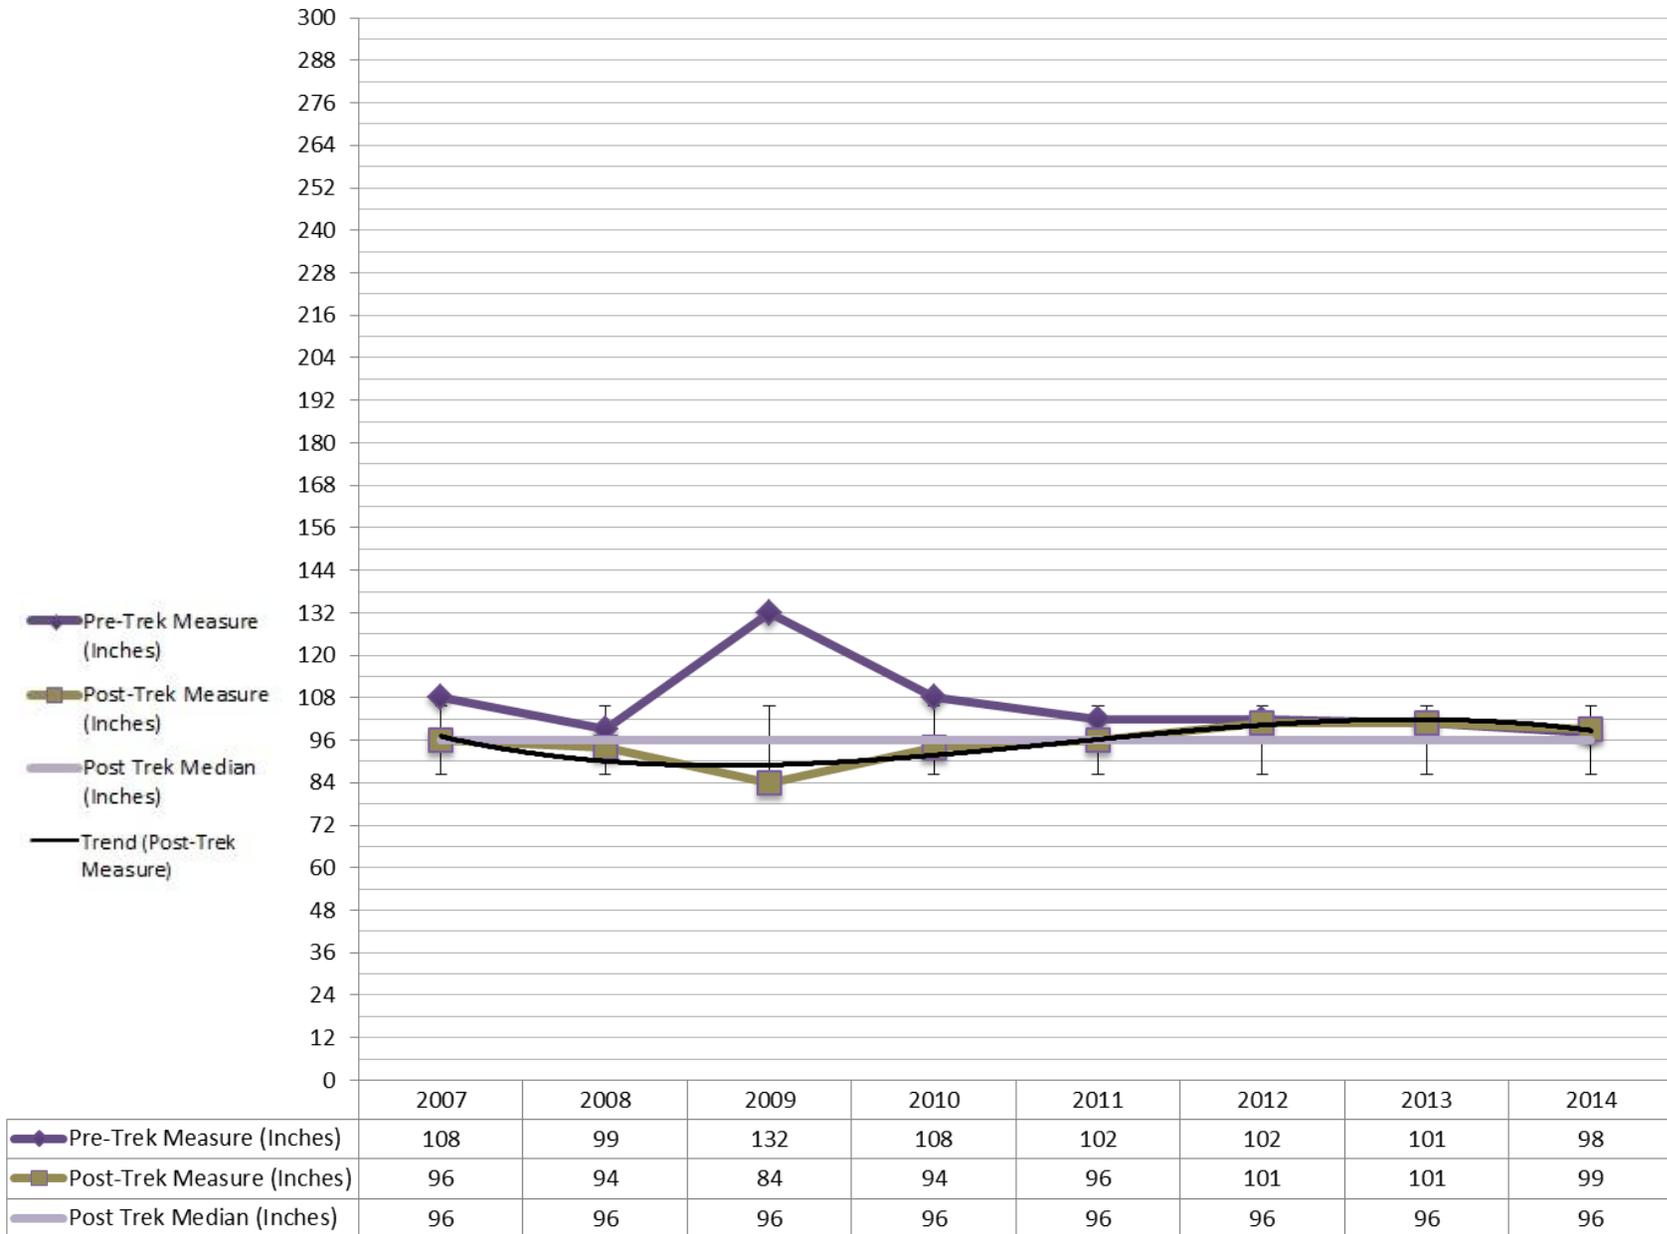

Site 28: 2014 Photo Comparisons



Preseason Site 28



Post Season Site 28

Site # 29		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	128	116	116	110	110	108	108	104	900	112.5	110
Pre-TTW	Pre-Trek Measure (Inches)	128	116	116	114	114	108	101	101	898	112.25	114
Difference		0	0	0	-4	-4	0	7	3	2	0.25	-4
Median	Post Trek Median (Inches)	110	110	110	110	110	110	110	110			
Post-AVG TW	Post-Trek Measure (Inches)	128	116	116	110	110	108	108	104	900	112.5	110
Pre-AVG TW	Pre-Trek Measure (Inches)	128	116	116	114	114	108	101	101	898	112.25	114
Difference		0	0	0	-4	-4	0	7	3	2	0.25	-4
Median	Post Trek Median (Inches)	110	110	110	110	110	110	110	110			
Post-GTD	Post-Trek Measure (Inches)	15.6	6.75	13.75	12	12	11	11.5	13	95.6	11.95	12
Pre-GTD	Pre-Trek Measure (Inches)	11	8.5	9.5	13	11	11	12	13	89	11.125	11
Difference		4.6	-1.75	4.25	-1	1	0	-0.5	0	6.6	0.825	1
Median	Post Trek Median (Inches)	12	12	12	12	12	12	12	12			
Post-TWTV	Post-Trek Measure (Inches)	0	0	0	0	0	0	0	0	0	0	0
Pre-TWTV	Pre-Trek Measure (Inches)	0	1	0	0	0	0	0	0	1	0.125	0
Difference		0	-1	0	0	0	0	0	0	-1	-0.125	0
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0	0		
Post-AHTV	Post-Trek Measure (Inches)	0	0	0	0	0	0	0	0	0	0	0
Pre-AHTV	Pre-Trek Measure (Inches)	0	0.75	0	0	0	0	0	0	0.75	0.09375	0
Difference		0	-0.75	0	0	0	0	0	0	-0.75	-0.0937	0
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			

Site 29: 2014 Photo Comparisons




Preseason Site 29



Postseason Site 29

Site # 30		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	96	100	92	89	92	90	84.5	120	763.5	95.4375	92
Pre-TTW	Pre-Trek Measure (Inches)	96	95	92	90	92	88	84	104	741	92.625	92
Difference		0	5	0	-1	0	2	0.5	16	22.5	2.8125	0
Median	Post Trek Median (Inches)	92	92	92	92	92	92	92	92			
Post-AVG TW	Post-Trek Measure (Inches)	96	100	33	26	29	26	24.25	29	363.25	45.40625	29
Pre-AVG TW	Pre-Trek Measure (Inches)	42	36	33	33	33	30	24.5	29	260.5	32.5625	33
Difference		54	64	0	-7	-4	-4	-0.25	0	102.75	12.84375	-4
Median	Post Trek Median (Inches)	29	29	29	29	29	29	29	29			
Post-GTD	Post-Trek Measure (Inches)	4.2	2.75	4.25	5	4.25	5.5	5	4	34.95	4.36875	4.25
Pre-GTD	Pre-Trek Measure (Inches)	3	3	5.5	6	4	4	5.5	2.5	33.5	4.1875	4
Difference		1.2	-0.25	-1.25	-1	0.25	1.5	-0.5	1.5	1.45	0.18125	0.25
Median	Post Trek Median (Inches)	4.25	4.25	4.25	4.25	4.25	4.25	4.25	4.25			
Post-TWTV	Post-Trek Measure (Inches)	0	8	24	36	24	36	36	0	164	20.5	24
Pre-TWTV	Pre-Trek Measure (Inches)	12	21	30	0	21	30	24.25	0	138.25	17.28125	21
Difference		-12	-13	-6	36	3	6	11.75	0	25.75	3.21875	3
Median	Post Trek Median (Inches)	24	24	24	24	24	24	24	24			
Post-AHTV	Post-Trek Measure (Inches)	0	0.125	1	1	1	1	1	0	5.125	0.640625	1
Pre-AHTV	Pre-Trek Measure (Inches)	0.5	1.5	2	0	1	1	1	0	7	0.875	1
Difference		-0.5	-1.375	-1	1	0	0	0	0	-1.875	-0.23438	0
Median	Post Trek Median (Inches)	1	1	1	1	1	1	1	1			

Site 30: Total Width of Trail Vegetation (TWTV)

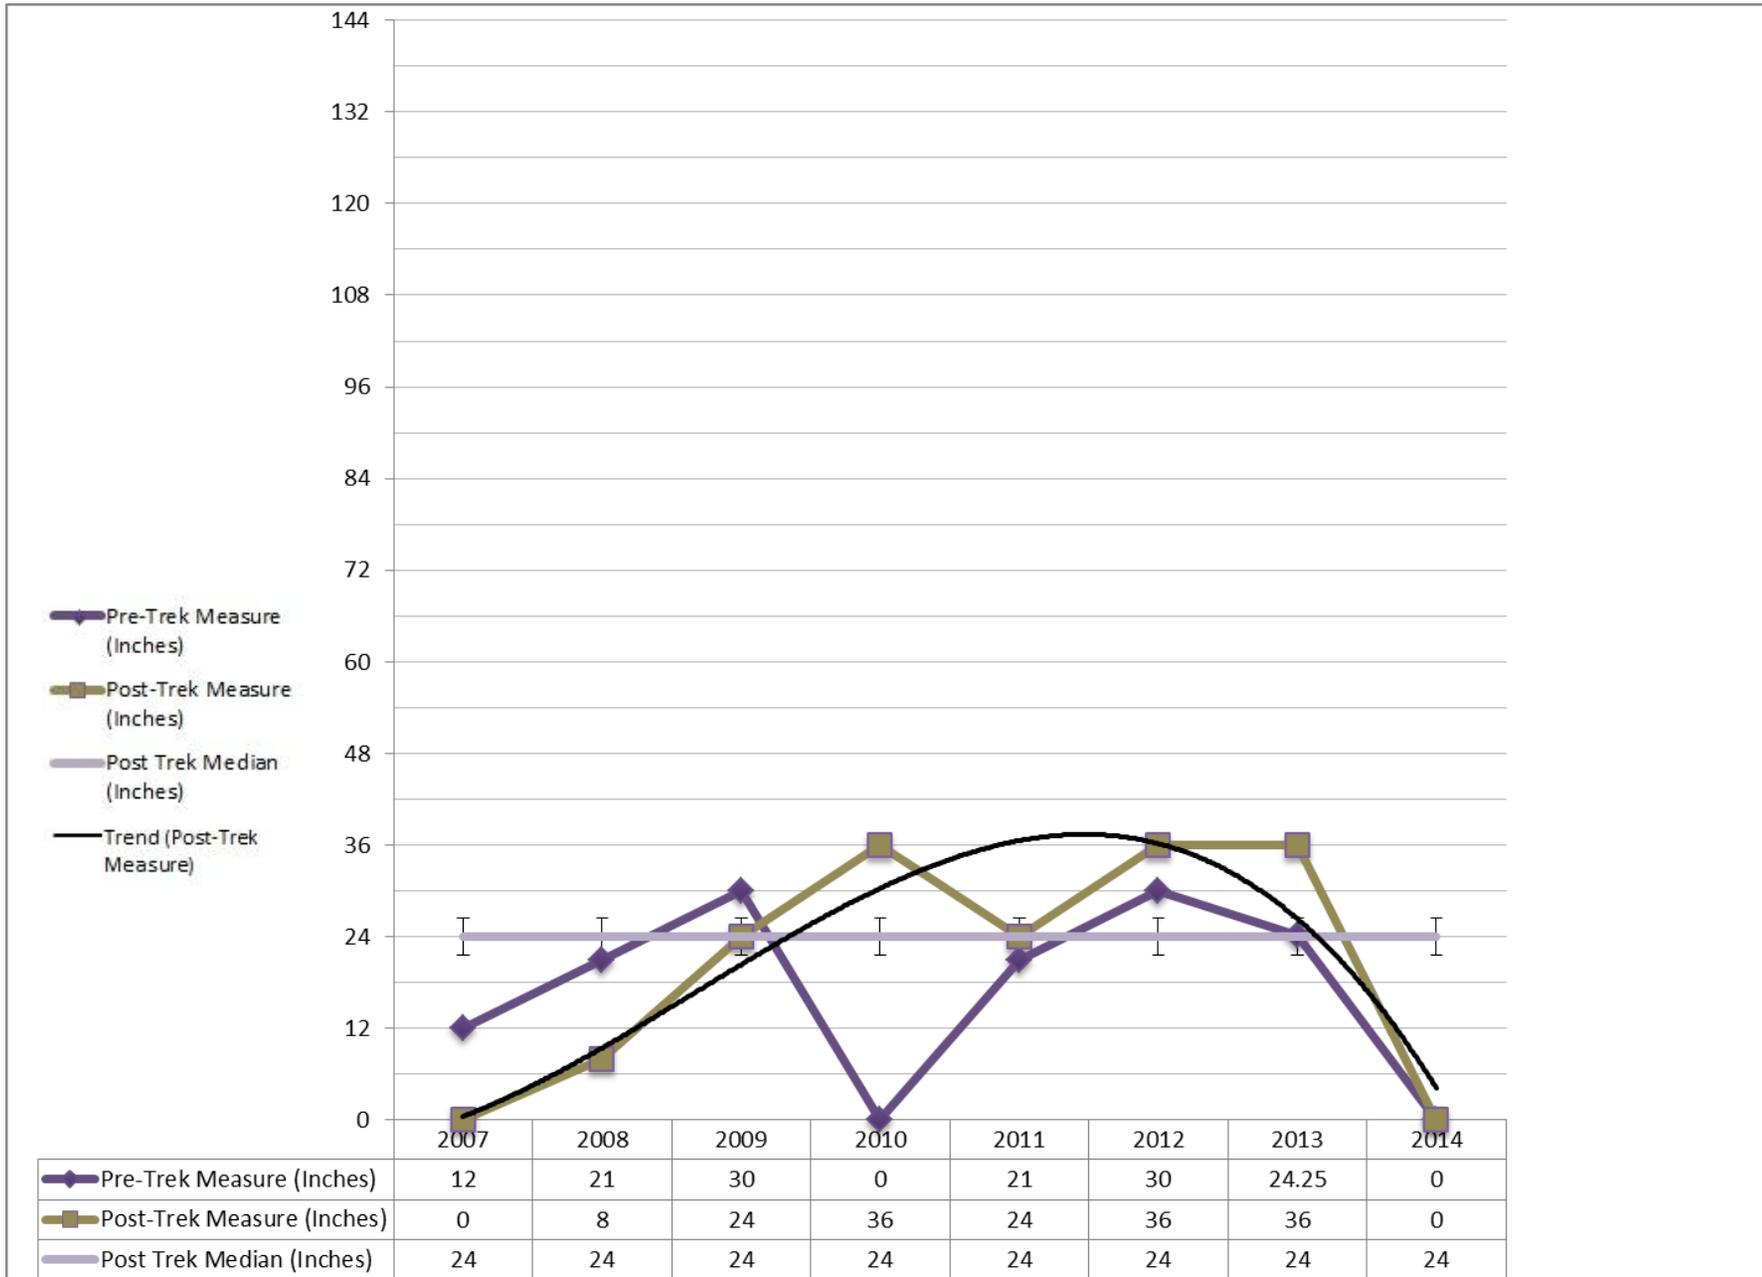

Site 30: 2014 Photo Comparisons



Preseason Site 30



Postseason Site 30

Site # 31

		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	108	128	96	100	100	100	96	101	829	103.625	100
Pre-TTW	Pre-Trek Measure (Inches)	90	90	98	80	90	89	89	101	727	90.875	90
Difference		18	38	-2	20	10	11	7	0	102	12.75	10
Median	Post Trek Median (Inches)	100	100	100	100	100	100	100	100			
Post-AVG TW	Post-Trek Measure (Inches)	108	128	27	27	27	27	27	36	407	50.875	27
Pre-AVG TW	Pre-Trek Measure (Inches)	31	33.6	30	18	30	11	12.5	36	202.1	25.2625	30
Difference		77	94.4	-3	9	-3	16	14.5	0	204.9	25.6125	-3
Median	Post Trek Median (Inches)	27	27	27	27	27	27	27	27			
Post-GTD	Post-Trek Measure (Inches)	3	3	1.5	5	3	4	4	1	24.5	3.0625	3
Pre-GTD	Pre-Trek Measure (Inches)	3	2	5	3.5	3	4	2	1	23.5	2.9375	3
Difference		0	1	-3.5	1.5	0	0	2	0	1	0.125	0
Median	Post Trek Median (Inches)	3	3	3	3	3	3	3	3			
Post-TWTV	Post-Trek Measure (Inches)	3.6	0	42	100	42	100	100	15	402.6	50.325	42
Pre-TWTV	Pre-Trek Measure (Inches)	33	15	36	42	36	66	48	17	293	36.625	36
Difference		-29.4	-15	6	58	6	34	52	-2	109.6	13.7	6
Median	Post Trek Median (Inches)	42	42	42	42	42	42	42	42			
Post-AHTV	Post-Trek Measure (Inches)	0.12	0	1	1	1	1	1	1	6.12	0.765	1
Pre-AHTV	Pre-Trek Measure (Inches)	1.5	0.25	4	3	1	1	1	1	12.75	1.59375	1
Difference		-1.38	-0.25	-3	-2	0	0	0	0	-6.63	-0.8287	0
Median	Post Trek Median (Inches)	1	1	1	1	1	1	1	1			

Site 31: 2014 Photo Comparisons




Preseason Site 31



Postseason Site 31

Site 32: Total Width of Trail Vegetation (TWTV)

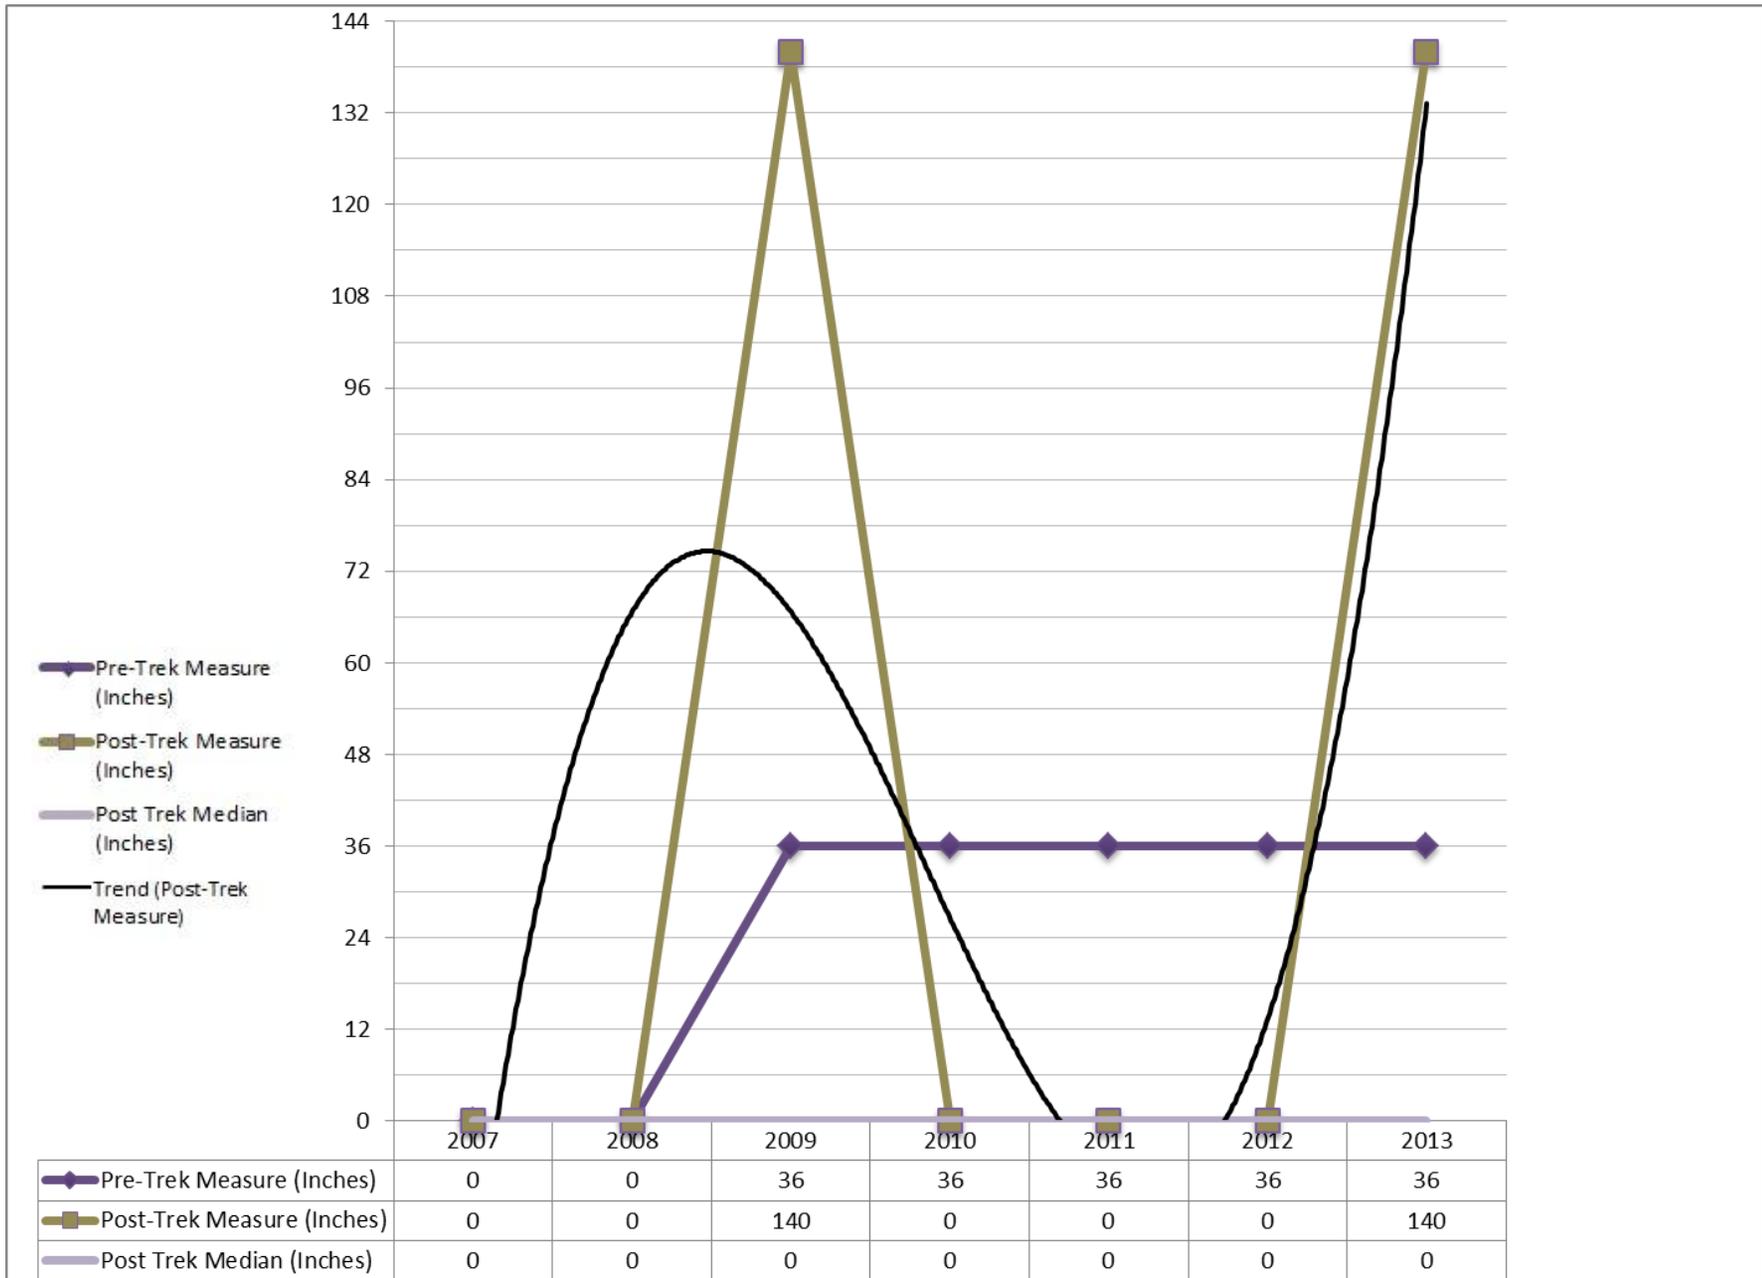

Site 32: 2014 Photo Comparisons



Preseason Site 32



Postseason Site 32

Site # 33

		Year										
		2007	2008	2009	2010	2011	2012	2013	2014	Total	Average	Median
Post-TTW	Post-Trek Measure (Inches)	116	123	128	111	113	108	108	99	906	113.25	111
Pre-TTW	Pre-Trek Measure (Inches)	110	121	125	114	110	90	108	101	879	109.875	110
Difference		6	2	3	-3	3	18	0	-2	27	3.375	1
Median	Post Trek Median (Inches)	111	111	111	111	111	111	111	111			
Post-AVG TW	Post-Trek Measure (Inches)	116	123	123	36	36	36	36	29	535	66.875	36
Pre-AVG TW	Pre-Trek Measure (Inches)	110	121	121	121	121	121	41	36	792	99	121
Difference		6	2	2	-85	-85	-85	-5	-7	-257	-32.125	-85
Median	Post Trek Median (Inches)	36	36	36	36	36	36	36	36			
Post-GTD	Post-Trek Measure (Inches)	9.6	7	9.5	10.5	9.5	9	10.5	8	73.6	9.2	9.5
Pre-GTD	Pre-Trek Measure (Inches)	7	5.5	12	11	10	10	10	6	71.5	8.9375	10
Difference		2.6	1.5	-2.5	-0.5	-0.5	-1	0.5	2	2.1	0.2625	-0.5
Median	Post Trek Median (Inches)	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5			
Post-TWTV	Post-Trek Measure (Inches)	0	0	0	18	0	18	18	0	54	6.75	0
Pre-TWTV	Pre-Trek Measure (Inches)	0	0	0	0	0	0	24	0	24	3	0
Difference		0	0	0	18	0	18	-6	0	30	3.75	0
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			
Post-AHTV	Post-Trek Measure (Inches)	0	0	0	1	0	1	1	0	3	0.375	0
Pre-AHTV	Pre-Trek Measure (Inches)	0	0	0	0	0	0	1	0	1	0.125	0
Difference		0	0	0	1	0	1	0	0	2	0.25	0
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			

Site 33: 2014 Photo Comparisons



Preseason Site 33




Postseason Site 33

Site # 34

		Year								Total	Average	Median
		2007	2008	2009	2010	2011	2012	2013	2014			
Post-TTW	Post-Trek Measure (Inches)	103.2	96	102	98	96	96	96	89	776.2	97.025	96
Pre-TTW	Pre-Trek Measure (Inches)	96	103	114	89	96	92	96	96	782	97.75	96
Difference		7.2	-7	-12	9	0	4	0	-7	-5.8	-0.725	0
Median	Post Trek Median (Inches)	96	96	96	96	96	96	96	96			
Post-AVG												
TW	Post-Trek Measure (Inches)	103.2	96	96	96	96	96	96	24	703.2	87.9	96
Pre-AVG												
TW	Pre-Trek Measure (Inches)	42	37	37	30	30	30	29	24	259	32.375	30
Difference		61.2	59	59	66	66	66	67	0	444.2	55.525	66
Median	Post Trek Median (Inches)	96	96	96	96	96	96	96	96			
Post-GTD	Post-Trek Measure (Inches)	2.64	6.75	5.5	7.5	7	7	8	7	51.39	6.42375	7
Pre-GTD	Pre-Trek Measure (Inches)	7	6.5	5	8	7	6.5	8	8	56	7	7
Difference		-4.36	0.25	0.5	-0.5	0	0.5	0	-1	-4.61	0.57625	0
Median	Post Trek Median (Inches)	7	7	7	7	7	7	7	7			
Post-TWTV	Post-Trek Measure (Inches)	0	6	0	0	0	0	0	0	6	0.75	0
Pre-TWTV	Pre-Trek Measure (Inches)	12	20	0	36	12	36	0	0	116	14.5	12
Difference		-12	-14	0	-36	-12	-36	0	0	-110	-13.75	-12
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0	0		
Post-AHTV	Post-Trek Measure (Inches)	0	0.66	0	0	0	0	0	0	0.66	0.0825	0
Pre-AHTV	Pre-Trek Measure (Inches)	18	2	0	3	2	3	0	0	28	3.5	2
Difference		-18	-1.34	0	-3	-2	-3	0	0	-27.34	-3.4175	-2
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			

Site 34: Average Height of Trail Vegetation (AHTV)

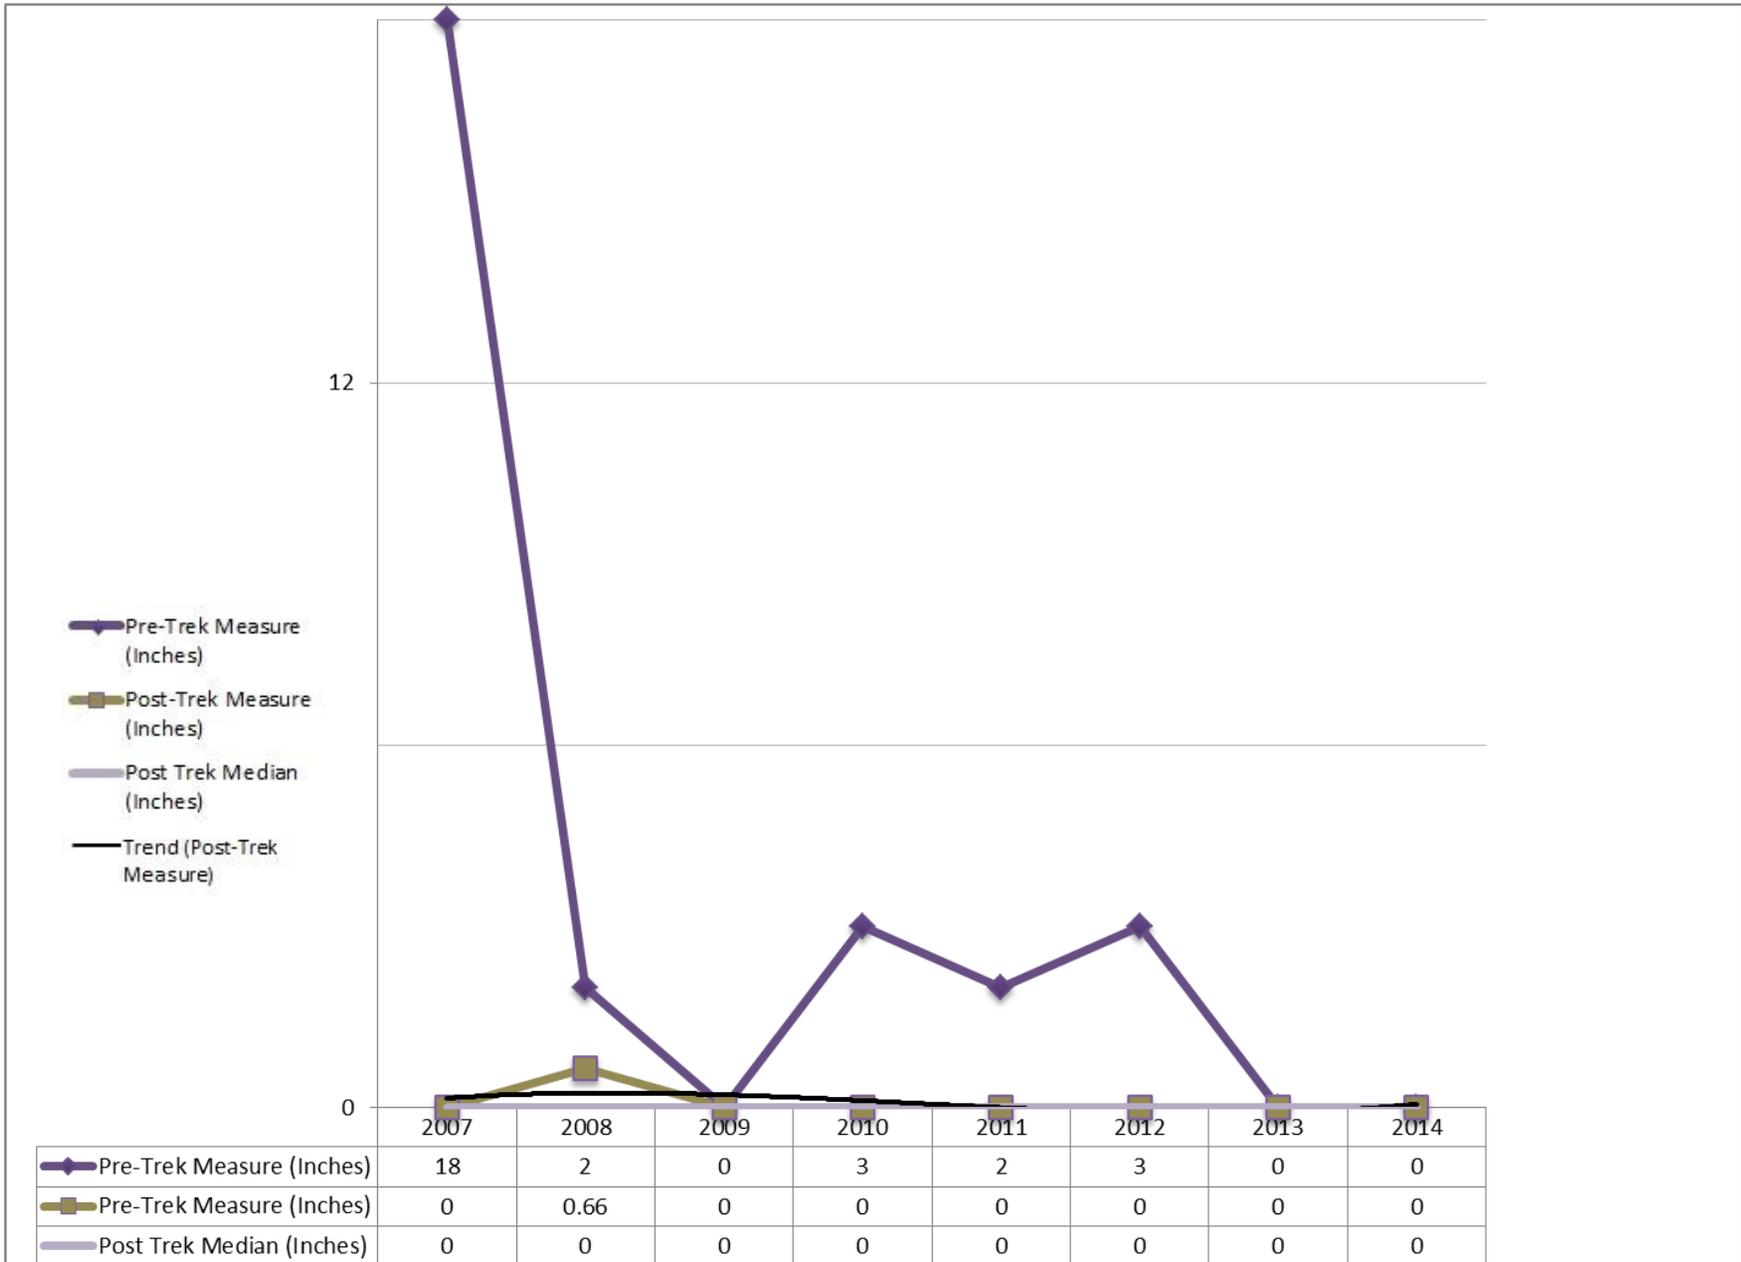

Site 34: 2014 Photo Comparisons



Preseason Site 34




Postseason Site 34

Site # 35

		Year										
		2007	2008	2009	2010	2011	2012	2013	2014	Total	Average	Median
Post-TTW	Post-Trek Measure (Inches)	112	114	108	102	103	102	96	103	840	105	103
Pre-TTW	Pre-Trek Measure (Inches)	102	110	120	112	108	99	96	108	855	106.875	108
Difference		10	4	-12	-10	-5	3	0	-5	-15	-1.875	-5
Median	Post Trek Median (Inches)	103	103	103	103	103	103	103	103			
Post-AVG												
TW	Post-Trek Measure (Inches)	112	114	114	114	114	114	114	113	909	113.625	114
Pre-AVG												
TW	Pre-Trek Measure (Inches)	102	110	110	110	110	110	84.5	82	818.5	102.3125	110
Difference		10	4	4	4	4	4	29.5	31	90.5	11.3125	4
Median	Post Trek Median (Inches)	114	114	114	114	114	114	114	114			
Post-GTD	Post-Trek Measure (Inches)	7.2	6	9.5	6.5	6.5	6	8	6.3	56	7	6.5
Pre-GTD	Pre-Trek Measure (Inches)	6	6	8	6.5	6.5	6.5	8	6.5	54	6.75	6.5
Difference		1.2	0	1.5	0	0	-0.5	0	-0.2	2	0.25	0
Median	Post Trek Median (Inches)	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5			
Post-TWTV	Post-Trek Measure (Inches)	0	0	0	0	0	0	0	0	0	0	0
Pre-TWTV	Pre-Trek Measure (Inches)	0	0	0	0	0	0	36	0	36	4.5	0
Difference		0	0	0	0	0	0	-36	0	-36	-4.5	0
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			
Post-AHTV	Post-Trek Measure (Inches)	0	0	0	0	0	0	0	0	0	0	0
Pre-AHTV	Pre-Trek Measure (Inches)	0	0	0	0	0	0	1	0	1	0.125	0
Difference		0	0	0	0	0	0	-1	0	-1	-0.125	0
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			

Site 35: Greatest Trail Depth

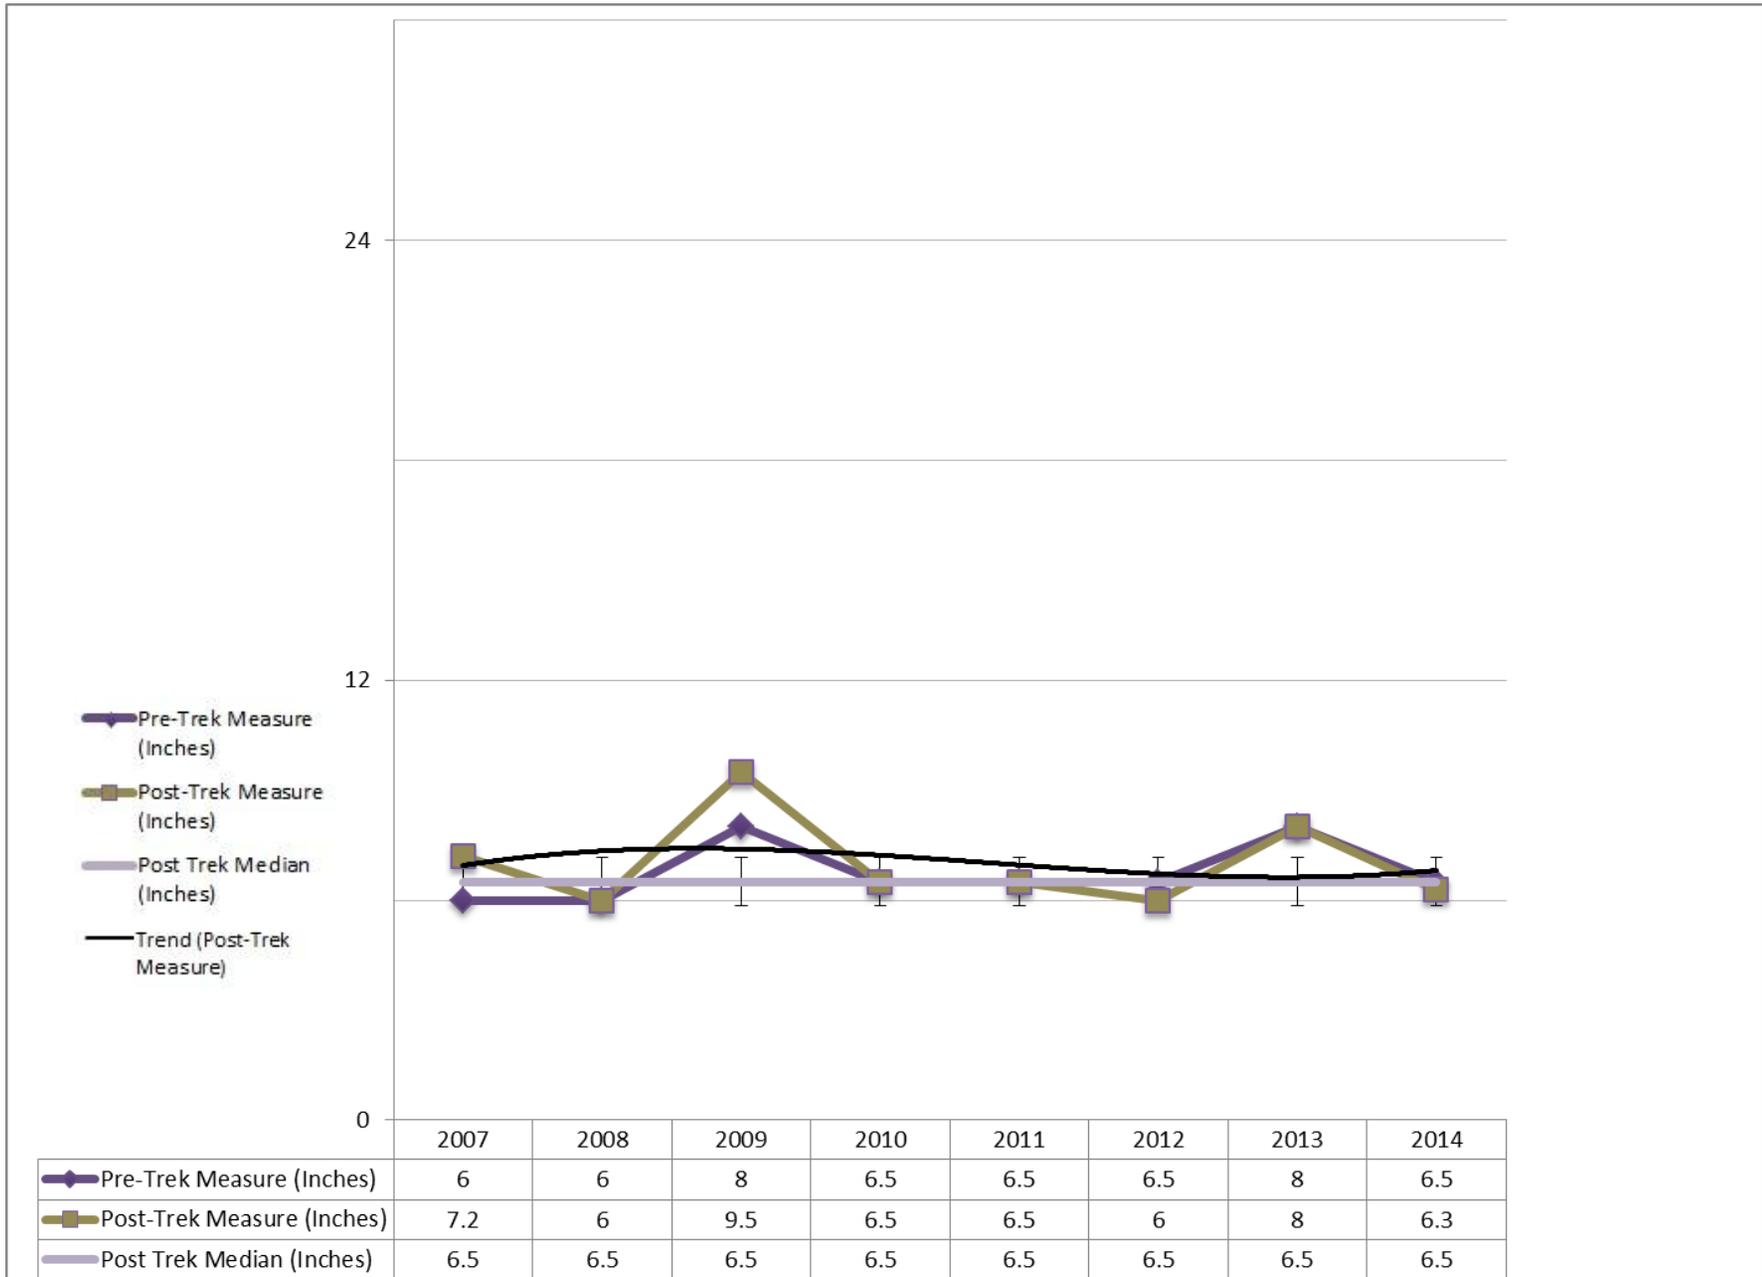

Site 35: 2014 Photo Comparisons



Preseason Site 35



Post Season Site 35

Site # 36

		Year										
		2007	2008	2009	2010	2011	2012	2013	2014	Total	Average	Median
Post-TTW	Post-Trek Measure (Inches)	127	127	110	147	138	138	156	149	1092	136.5	138
Pre-TTW	Pre-Trek Measure (Inches)	124	124	156	132	138	138	156	149	1117	139.625	138
Difference		3	3	-46	15	0	0	0	0	-25	-3.125	0
Median	Post Trek Median (Inches)	138	138	138	138	138	138	138	138			
Post-AVG TW	Post-Trek Measure (Inches)	127	127	47	47	47	47	47	47	536	67	47
Pre-AVG TW	Pre-Trek Measure (Inches)	58	58	58	58	58	58	58	58	464	58	58
Difference		69	69	-11	-11	-11	-11	-11	-11	72	9	-11
Median	Post Trek Median (Inches)	47	47	47	47	47	47	47	47			
Post-GTD	Post-Trek Measure (Inches)	6	6	6.5	10.5	10.5	11	11	11	72.5	9.0625	10.5
Pre-GTD	Pre-Trek Measure (Inches)	8	8	10	10.5	10	11.5	10	10	78	9.75	10
Difference		-2	-2	-3.5	0	0.5	-0.5	1	1	-5.5	-0.6875	-0.5
Median	Post Trek Median (Inches)	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5			
Post-TWTV	Post-Trek Measure (Inches)	0	0	17	0	0	0	0	0	17	2.125	0
Pre-TWTV	Pre-Trek Measure (Inches)	8	8	0	0	0	0	0	0	16	2	0
Difference		-8	-8	17	0	0	0	0	0	1	0.125	0
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			
Post-AHTV	Post-Trek Measure (Inches)	0	0	1	0	0	0	0	0	1	0.125	0
Pre-AHTV	Pre-Trek Measure (Inches)	1	1	0	0	0	0	0	0	2	0.25	0
Difference		-1	-1	1	0	0	0	0	0	-1	-0.125	0
Median	Post Trek Median (Inches)	0	0	0	0	0	0	0	0			

Site 36: 2014 Photo Comparisons



Preseason Site 36



Postseason Site 36